


ENYO 2 D

RECESSED FIXED LED DOWNLIGHT

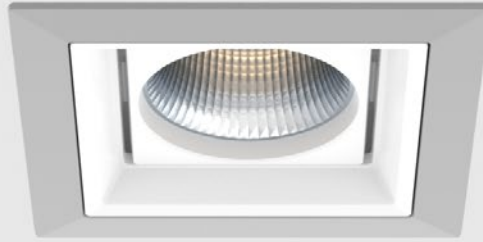

ENYO 2 D - Recessed Fixed LED Downlight. Enyo 2 D features SENSO-designed reflectors and a wide range of color temperatures in a high performance yet efficient and compact package. As part of the Enyo family of downlights, it's easy to get a cohesive design regardless of fixture size or style.

Ordering Code

Fixture	EN2D								
	1	2	3	4	5	6	7	8	9
Driver		EN2D	--			--	--		
	1	2	3	4	5	6	7		

Product Specifications

SAMPLE: Fixture **EN2D - FL - A90 - 615 - 25 - 07 - DL - 02 - 08** | Driver **910 - EN2D - FL - STD - 120 - A90 - 07**

1 - Model	2 - Trim	3 - LED	4 - Optic	5 - CCT	6 - Lumen	7 - Accessory	8 - Trim Color
EN2D · Enyo 2 Downlight	FL · Flanged	A90 · 93+ CRI Accuracy	615 · 15° 630 · 30° 645 · 45° 660 · 60°	25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K	07 · 700 (6.1W) 10 · 1000 (9.1W) 15 · 1500 (14W) 20 · 2000 (19.8W)	00 · No Accessory DL · Diffusing Lens HO · Honeycomb	01 · White 02 · Black 08 · Silver XX · Custom

9 - Baffle Color	1 - Housing Style	2 - Model	3 - Trim	4 - Driver	Dim Level	Dim Level
01 · White 02 · Black 08 · Silver XX · Custom	910 · Remote 915 · New Construction 920 · IC Housing ^{*1}	Same as Fixture	Same as Fixture	STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase ^{*2/3} ELDOLC · EldoLED 0 - 10 Volt ^{*4} DALI · Dali Protocol ^{*4}	N/A 1% 1% 0.1% 0.1%	LUTES · Hilume Ecodigital ^{*4} 1% LUT2W · 2 Wire for phase ^{*3/4} 1% DMX · SENSO ^{*4} EMG · Emergency Driver ^{*4/5}

5 - Voltage	6 - LED	7 - Lumen
120 · 120V 277 · 277V 347 · 347V	Same as Fixture	Same as Fixture

*1 Cannot exceed **1500lm**
*2 Not available in **700lm**
*3 120V only
*4 Requires remote housing
*5 Specified separately

Project : _____
Quantity : _____
Type : _____
Notes : _____

ENYO 2 D

RECESSED FIXED LED DOWNLIGHT

LED Module Performance

- Output:** up to 2000lm
- High Efficacy:** up to 113 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K or 6500K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 93+ CRI & 50+ R9 Value

Driver and Power Consumption

- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9
Efficiency over 85%

Installation: Small Footprint allows retrofit installations

Lumen Option	700lm	1000lm	1500lm	2000lm
Fixture Wattage	6.1	9.1W	14W	19.8W
Delivered Lumen	691lm	1018lm	1513lm	2065lm




Installation

- For new and retrofit installations
- Simple connection between fixture and driver via quick connect

Construction / Finish


- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Cast Aluminum Trim
- Rated for damp locations
- Made in Canada

Dimensions

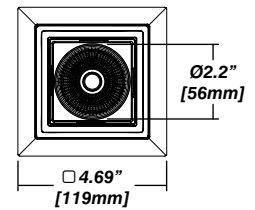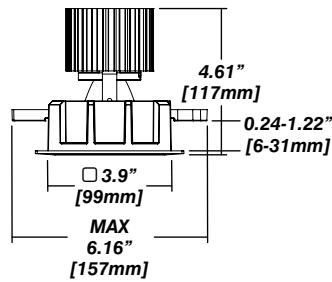


Accessories

Diffusing Lens

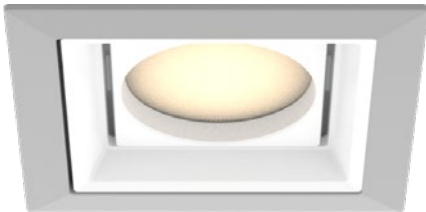

Honeycomb Mesh



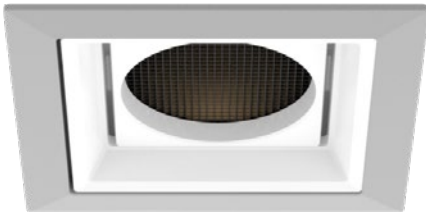


ENYO 2 D




RECESSED FIXED LED DOWNLIGHT

Housing Options

Standard Senso Housing - 910



Dimension

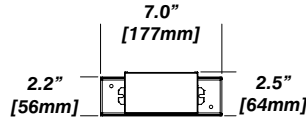


Included



Unless specified otherwise, this is provided as standard

- Driver with enclosure**
 - Galvanized steel enclosure
- Installation**
 - Laying on top of ceiling
 - Remote from fixture

New Construction - 915

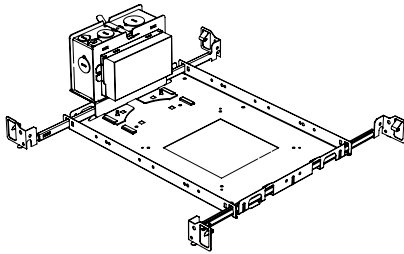


Dimension

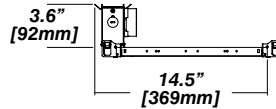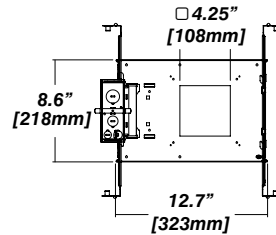



Included

- Plaster Frame**
 - Galvanized steel construction with cut-out
- Bar hanger**
 - Length: from 14-3/16" to 26"
- Outlet Box**
 - Outlet Box Included

IC Housing - 920

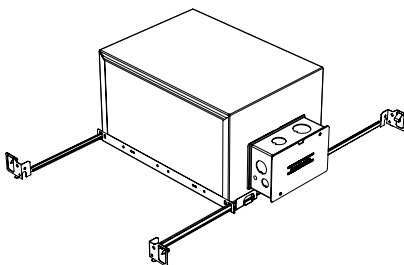

Dimension

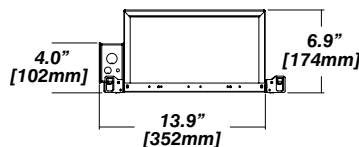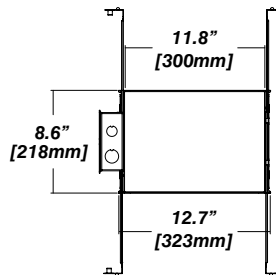

Included

- IC Housing**
 - Galvanized steel construction
 - Airtight
 - Includes gasket prepped junction box
- Plaster Frame**
 - Galvanized steel construction
- Bar hanger**
 - Length: from 14-3/16" to 26"

Note: use only with LED modules up to 1500lm

