

LineLED Wet 24V - Installation Instructions

Models LLRGB42-XX



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

REVO.5
10122022


1 / 1

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN
2. ENSURE POWER IS OFF AT FUSE BOX PRIOR TO INSTALLATION TO PREVENT ELECTRICAL SHOCK
3. USE ONLY WITH CLASS 2 POWER UNIT
4. SUITABLE FOR DAMP LOCATIONS
5. FOR UNDER CABINET OR SHELF MOUNT
6. CONFORMS TO UL STD 2108. CERTIFIED TO CSA STD NO. 250.0.

ATTENTION: ALWAYS TEST LLRGB42 BEFORE INSTALLING. CONNECT LL42-RGB TO POWER SUPPLY TO ENSURE IT IS WORKING PROPERLY AND NO DAMAGE HAS OCCURRED DURING SHIPPING.


1



1.1 Clean area thoroughly where tape will be installed.


For rough surface installations, it is recommended to apply a layer of Aluminum tape or similar material prior to tape application.

2

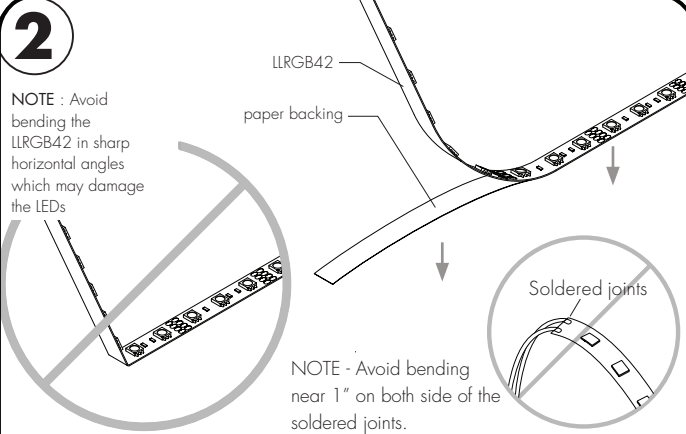

2.1 Remove the paper backing from the LLRGB42 and firmly press down making sure there are no air bubbles that can cause surface irregularities. Do not remove the adhesive, removing the adhesive may cause arcing of the Line LED tape.

3

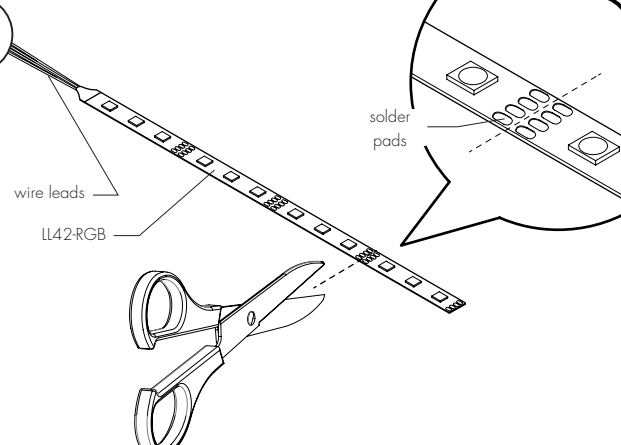

2.1 If required for installation, cut the LLRGB42 strip between two rows of solder pads. Always cut LLRGB42 from end without connector / wire leads.

4

4.1 Follow RGB controller and receiver instructions for all wiring connections. Refer to diagram for needed components.

