

LETO 11 WM UD

WALL MOUNT LED UPLIGHT AND DOWNLIGHT



Leto 11 WM UD - Wall Mount LED Light. LETO 11 WM UD is a wall mounted cylinder LED fixture designed to provide a space with indirect up and down lighting.

Ordering Code

Fixture	749							
	1	2	3	4	5	6	7	8
Driver			--	--				
	1	2	3	4				

Product Specifications

SAMPLE: Fixture **749 - A90 - 61015 - 27 - 0707 - 00 - 08 - 08** | Driver **00 - STD - 120 - A90 - 0707**

1 - Model	2 - LED	3 - Optic		4 - CCT	5 - Lumen	6 - Accessory*2
749 · Leto 11 WM UD	A90 · 93+ CRI Accuracy	<i>Down Faceted</i>	<i>Up</i>	25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K	<i>Direct / Indirect</i> 0707 · 700/700 1010 · 1000/1000 <i>For other direct / indirect possibilities please contact factory team</i> <i>Wattage on page 3</i>	00 · No Accessory AR · Acrylic Ring DL · Diffusing Lens HO · Honeycomb SL · Solite Lens
		610 · 10° 618 · 18° 630 · 30° 645 · 45° 660 · 60° 728 · 28° Glass Optic*1 748 · 48° Glass Optic*1	17 · 17° 24 · 24° 60 · 60°			
		<i>Down Smooth</i> 630S · 30° 645S · 45°				

7 - Body Color		8 - Baffle Color		1 - Driver	Dim Level	Dim Level
<i>Standard</i>	<i>Premium</i>	<i>Standard</i>	<i>Premium</i>	STD · Non Dimming	N/A	LUTES · Hilume Ecodigital*4 1%
01 · White	52 · Mocha	01 · White	52 · Mocha	LCS · 0 - 10 Volt Protocol	1%	DMX · SENSO*4
02 · Black	53 · Charcoal	02 · Black	53 · Charcoal	DIM · Phase*3	1%	EMG · Emergency Driver*4/5
08 · Silver	54 · Cerulean	08 · Silver	54 · Cerulean	ELDOLC · EldoLED 0 - 10 Volt*4	0.1%	CSMB · Casambi Wireless Control*4/5
	55 · Firebrick		55 · Firebrick	DALI · Dali Protocol*4	0.1%	
	XX · RAL		XX · RAL			

2 - Voltage	3 - LED	4 - Lumen	
120 · 120V 277 · 277V 347 · 347V*4/6	Same as Fixture	Same as Fixture	*1 accessories not available *2 available on downlight only *3 120V only *4 remote mount *5 second driver required *6 not available with ELDO, Lutron or DMX
			Project : _____ Quantity : _____ Type : _____ Notes : _____ _____

LETO 11 WM UD

WALL MOUNT LED UPLIGHT AND DOWNLIGHT

Reflectors

Senso metal spun faceted reflectors are specifically designed to retain as much light as possible. This results in a more power efficient fixture with a higher delivered lumen.

Faceted Reflector



Domed Glass Optic




Installation

- Mounting plate included
- Easy, single motion installation method

Construction / Finish

- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Aluminum extruded Body
- Made in Canada


Dimensions

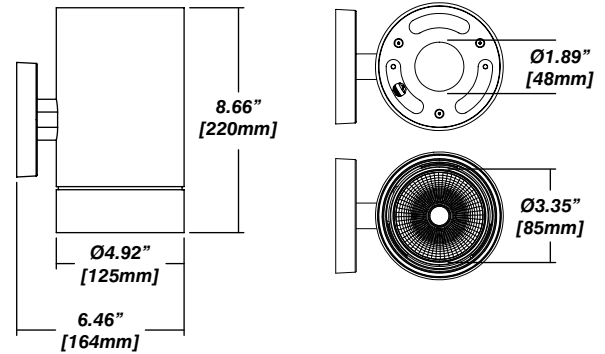

Senso Driver Housings


Single Remote Driver Housing

- Fits Standard, LCS or DIM drivers
- Galvanized steel enclosure
- For remote driver applications





Double Remote Driver Housing

- Fits all drivers
- Galvanized steel enclosure
- For remote driver applications





Dimensions

Single




Double




Accessories

Acrylic Ring




Diffusing Lens



Solite Lens



Honeycomb Mesh



LETO 11 WM UD

WALL MOUNT LED UPLIGHT AND DOWNLIGHT



Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See Sensolighting.com for more information.

**Full photometric Reports and IES files available for every configuration*

Color Metrics

TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

**Full Color Metric Info Available at Sensolighting.com*

LED Module Performance

Output: Up to 104 lumen/Watt

Efficacy: Color consistency within a 3-MacAdam Ellipse

CCT: 2500K - 6500K

Color Rendering: 93+ CRI

Min. R Values: R⁹ - 60 R^f - 90 R^a - 100

Driver and Power Consumption

Dimming: 1% dimming standard with 0.1% option
Casambi wireless control available

Ripple: Industry leading Low ripple

Efficiency: Power Factor >0.9
Efficiency over 85%
Class 2 output for safety


Installation: Remote mounted

Integral Drivers: STD, LCS, DIM


All other drivers require remote mounting

Lumen Option	700/700	1000/1000
Fixture Wattage	12.2W	18.2W
Delivered Lumen	1270lm	1851lm

Leto Light Distribution: Reflector

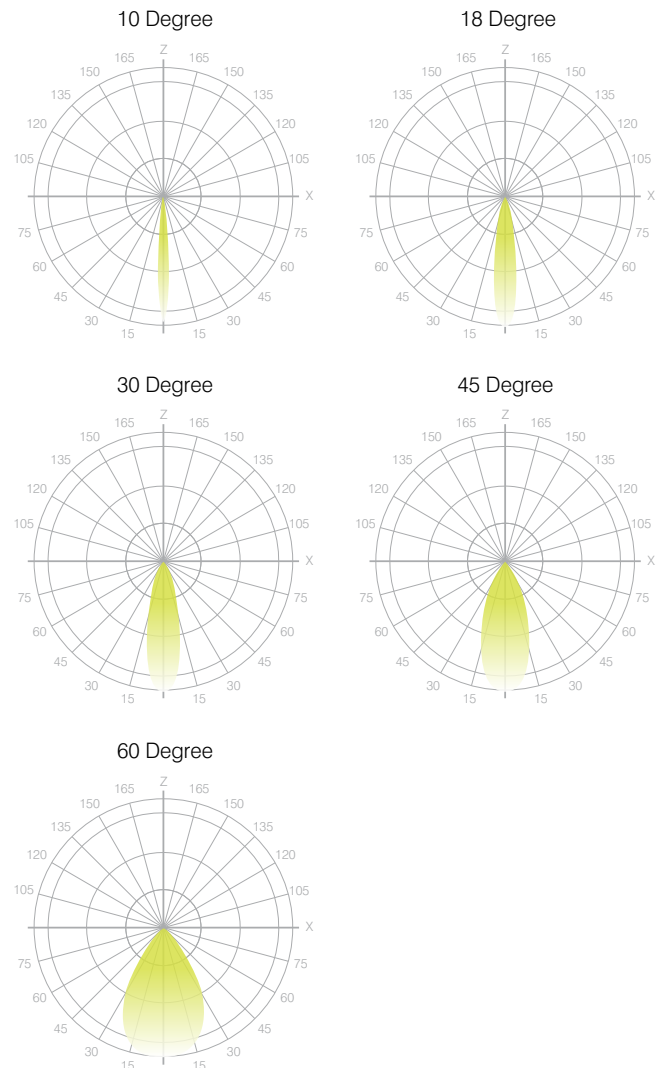

Leto Light Distribution: Glass Optic

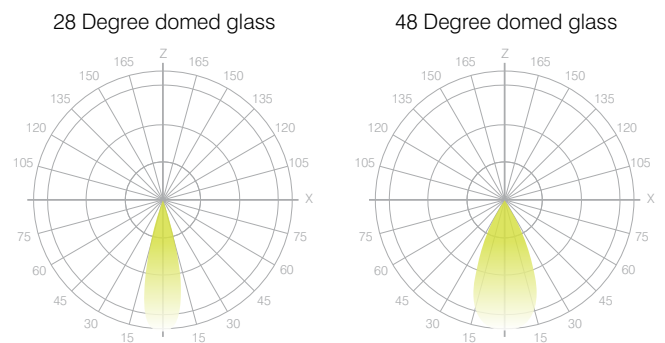

LETO 11

FAMILY

