

LETO 11.5 S

SURFACE MOUNT LED DOWNLIGHT



Leto 11.5 S - Surface Mount LED Light. LETO 11.5 S is a compact version of the full sized LETO 11 S. Packing the same power as the taller Body, LETO 11.5 S offers more discretion when planning your lighting.

Ordering Code

Fixture	698							
	1	2	3	4	5	6	7	8
Driver			--	--				
	1	2	3	4				

Product Specifications

SAMPLE: Fixture **698 - A90 - 610 - 27 - 07 - AR - 08 - 02** | Driver **STD - 120 - A90 - 07**

1 - Model	2 - LED	3 - Optic		4 - CCT	5 - Lumen	6 - Accessory
698 · Leto 11.5 S	A90 · 93+ CRI Accuracy	<i>Faceted</i>	<i>Smooth</i>	25 · 2500K	07 · 700 (6.1W)	00 · No Accessory
		610 · 10°	630S · 30°	27 · 2700K	10 · 1000 (9.1W)	AR · Acrylic Ring
		618 · 18°	645S · 45°	30 · 3000K	15 · 1500 (14W)	DL · Diffusing Lens
		630 · 30°		35 · 3500K		HO · Honeycomb
		645 · 45°		40 · 4000K		SL · Solite Lense
		660 · 60°		65 · 6500K		
		728 · 28° Glass Optic*7				
		748 · 48° Glass Optic*7				

7 - Body Color		8 - Baffle Color		1 - Driver	Dim Level	Dim Level
<i>Standard</i>	<i>Premium</i>	<i>Standard</i>	<i>Premium</i>	STD · Non Dimming	N/A	LUTES · Hilume Ecodigital ³ 1%
01 · White	52 · Mocha	01 · White	52 · Mocha	LCS · 0 - 10 Volt Protocol	1%	LUT2W · 2 Wire for phase ^{2/3} 1%
02 · Black	53 · Charcoal	02 · Black	53 · Charcoal	DIM · Phase ²	1%	DMX · SENSO ³
08 · Silver	54 · Cerulean	08 · Silver	54 · Cerulean	ELDOLC · EldoLED 0 - 10 Volt ³	0.1%	EMG · Emergency Driver ^{3/4}
	55 · Firebrick		55 · Firebrick	DALI · Dali Protocol ³	0.1%	CSMB · Casambi Wireless Control ^{3/4}
	XX · RAL		XX · RAL			

2 - Voltage	3 - LED	4 - Lumen		
120 · 120V	Same as Fixture	Same as Fixture	*1 accessories not available / limited to 1500lm	Project : _____
277 · 277V			*2 120V only	Quantity : _____
347 · 347V ^{3/5}			*3 remote mount	Type : _____
			*4 second driver required	Notes : _____
			*5 not available with ELDO, Lutron or DMX	_____

LETO 11.5 S

SURFACE MOUNT LED DOWNLIGHT

Reflectors

Senso metal spun faceted reflectors are specifically designed to retain as much light as possible. This results in a more power efficient fixture with a higher delivered lumen.

Faceted Reflector



Domed Glass Optic





Installation

- Mounting plate included
- Easy, single motion installation method

Construction / Finish


- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Aluminum extruded Body
- Made in Canada

Dimensions




Accessories

Acrylic Ring




Diffusing Lens



Solite Lens



Honeycomb Mesh



LETO 11.5 S

SURFACE MOUNT LED DOWNLIGHT



Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See Sensolighting.com for more information.

**Full photometric Reports and IES files available for every configuration*

Color Metrics

TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

**Full Color Metric Info Available at Sensolighting.com*

LED Module Performance

Output: Up to 106 lumen/Watt

Efficacy: Color consistency within a 3-MacAdam Ellipse

CCT: 2500K - 6500K

Color Rendering: 93+ CRI

Min. R Values: R⁹ - 60 R^f - 90 R⁹ - 100

Driver and Power Consumption

Dimming: 1% dimming standard with 0.1% option
Casambi wireless control available


Ripple: Industry leading Low ripple

Efficiency: Power Factor >0.9
Efficiency over 85%
Class 2 output for safety


Installation: Remote mounted

Lumen Option	700lm	1000lm	1500lm
Fixture Wattage	6.1W	9.1W	14W
Delivered Lumen	647lm	965lm	1474lm

Leto Light Distribution: Reflector

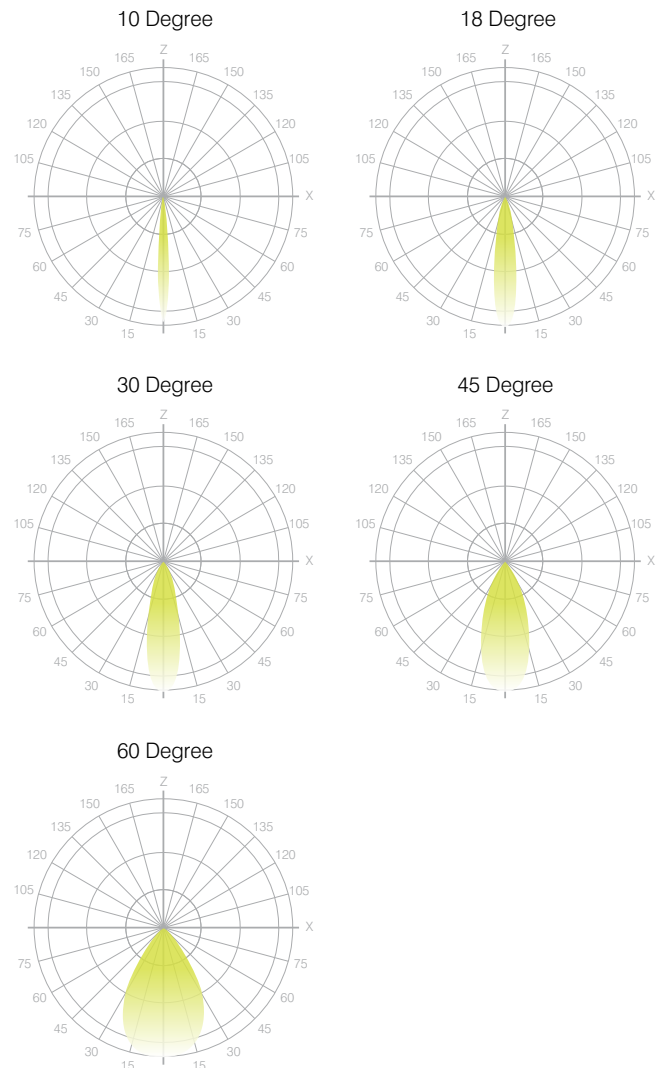

Leto Light Distribution: Glass Optic

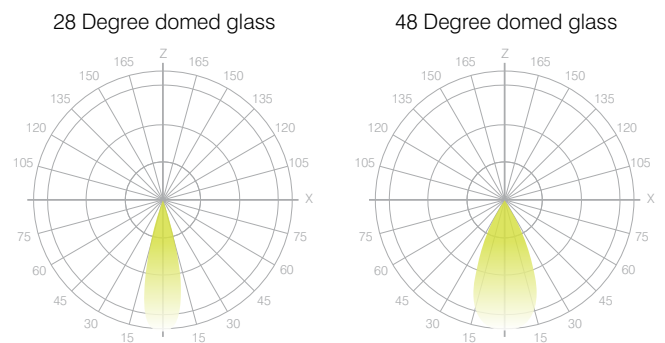

LETO 11

FAMILY

