


LETO 44 Mini P

PENDANT LED DOWNLIGHT

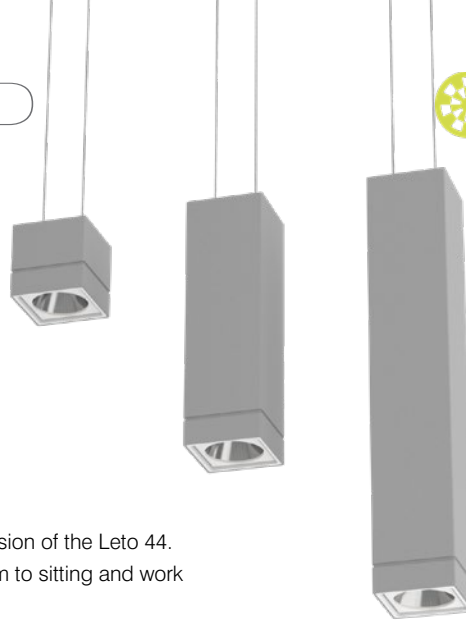

Leto 44 Mini - Pendant LED Light. Leto 44 Mini is a slimmed down version of the Leto 44. This small, medium and large pendant is slim and offers sleek minimalism to sitting and work areas with an efficient and powerful LED module.

Ordering Code

| | | | | | | | | | |
|---------|------------|---|---|---|---|---|----|----|---|
| Fixture | 731 | | | | | | | | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| Driver | | | | | | | -- | -- | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | |

Product Specifications

SAMPLE: Fixture **731 - S - A90 - 617 - 27 - 07 - 00 - 08 - 02** | Driver **954 - 08 - 05 - 00 - STD - 120 - A90 - 07**

| 1 - Model | 2 - Size | 3 - CRI/LED | 4 - Optic | 5 - CCT | 6 - Lumen | 7 - Accessory |
|-----------------------------------|--|-------------------------------|--|--|---|---|
| 731 · Leto 44 Mini Pendant | S · Small (73mm) M · Medium (209mm) L · Large (346mm) | A90 · 93+ CRI Accuracy | 617 · 17° 624 · 24° 660 · 60° | 25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K | 07 · 700 (6.1W) 10 · 1000 (9.1W) 15 · 1500 (14W)** | 00 · No Accessory DL · Diffusing Film HO · Honeycomb** |

| 8 - Body Color | 9 - Baffle Color | 1 - Canopy Style | 2 - Canopy Color | 3 - Suspension Type |
|---|---|---|---|---|
| <i>Standard</i> <i>Premium</i> 01 · White 52 · Mocha 02 · Black 53 · Charcoal 08 · Silver 54 · Cerulean 55 · Firebrick BZ · Bronze WN · Warm Nickel AB · Aged Brass XX · RAL | <i>Standard</i> <i>Premium</i> 01 · White 52 · Mocha 02 · Black 53 · Charcoal 08 · Silver 54 · Cerulean 55 · Firebrick BZ · Bronze WN · Warm Nickel AB · Aged Brass XX · RAL | 955 · Round Slim 965 · Square Slim 955F · Round Flangeless*2 954 · Round Semi-Recessed | <i>Standard</i> <i>Premium</i> 01 · White 52 · Mocha 02 · Black 53 · Charcoal 08 · Silver 54 · Cerulean 55 · Firebrick BZ · Bronze WN · Warm Nickel AB · Aged Brass XX · RAL | 03 · Solid Stem (6' MAX) 05 · 2 Powered Aircraft*3 (6' incl.) <i>Contact SENSOLIGHTING for custom lengths</i> |

| 4 - Suspension Color | 5 - Driver | Dim Level | Dim Level | 6 - Voltage | 7 - CRI/LED | 8 - Lumen |
|--|--|-------------------------|--|------------------------|---|------------------------------------|
| 00 · None*3 01 · White 02 · Black XX · Custom | STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase*4 ELDOLC · EldoLED 0 - 10 Volt*5 | N/A 1% 1% 0.1% | DALI · Dali Protocol*5 LUTES · Hilume Ecodigital*5 LUT2W · 2 Wire for phase*4/5 CSMB · Casambi Wireless Control*5/6 | 0.1% 1% 1% 1% | 120 · 120V 277 · 277V 347 · 347V*5/7 | Same as Fixture Same as Fixture |

*1 not available with small size

*2 always remote mount driver

*3 no feed cable color option for **05** - 2 Powered Aircraft

*4 120V only

*5 remote mount

*6 second driver required

*7 not available with DALI or Lutron drivers

LETO 44 Mini P

PENDANT LED DOWNLIGHT



LED Module Performance

- Output:** up to 1500lm
- High Efficacy:** up to 110 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K, 6500K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 93+ CRI & 50+ R9 Value


Driver and Power Consumption

- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9
Efficiency over 85%
Class 2 output for safety

| Lumen Option | 700lm | 1000lm | 1500lm |
|-----------------|-------|--------|--------|
| Delivered Lumen | 671lm | 981lm | 1426lm |
| Fixture Wattage | 6.1W | 9.1W | 14W |

Driver Placement

- **Standard, LCS, and Phase dimming** drivers may be mounted in the junction box.
- Minimum volume required to mount drivers in junction box:
70mm x 40mm x 30mm

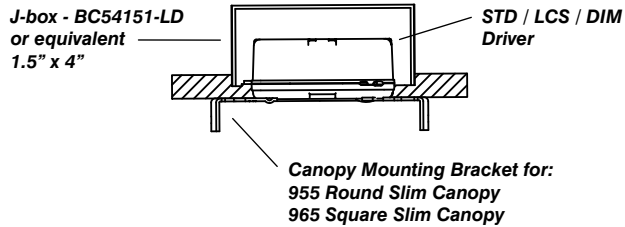

Installation


- Height adjustable feed cable, powered aircraft cable or solid stem included
- Pre-assembled for quick installation

Construction


- Machined aluminum construction
- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Made in Canada

Dimensions



L - Large

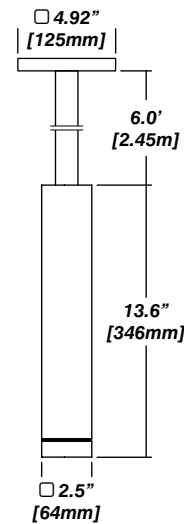

M - Medium

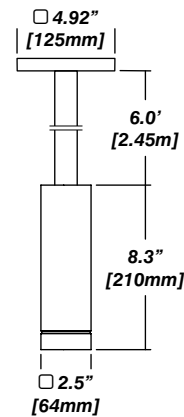

S - Small

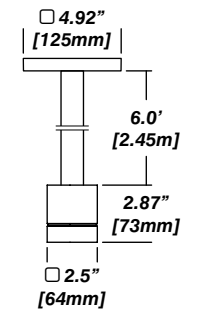

LETO 44 Mini P

PENDANT LED DOWNLIGHT

Accessories

Diffusing Film

Honeycomb




Standard Finishes

01 - White

02 - Black

08 - Silver



Premium Finishes

55 - Mocha

56 - Charcoal

57 - Cerulean




58 - Firebrick

BZ - Bronze

WN - Warm Nickel




AB - Aged Brass




Canopy


955 - Round Slim

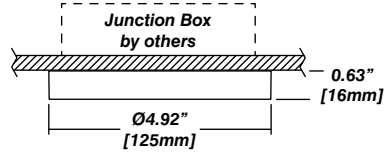


965 - Square Slim

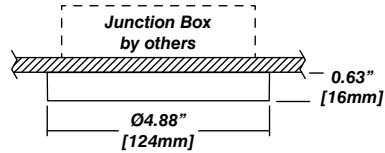

955F - Round Flangeless

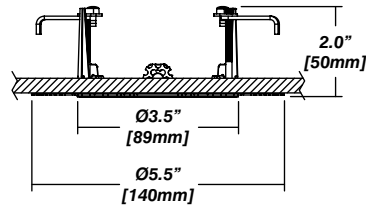

954 - Semi-Recessed + Cylinder Driver Housing

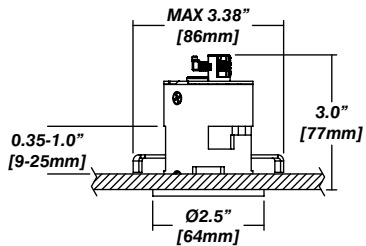

Ø2.125\"/>

CUT-OUT


LETO 44 Mini P

PENDANT LED DOWNLIGHT



Senso Driver Housings

910 - Single Remote Driver Housing

- Fits Standard, LCS or DIM drivers
- Galvanized steel enclosure
- Installed in remote location






Dimensions

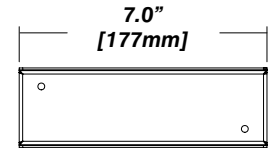



910 - Double Remote Driver Housing

- Fits all drivers
- Galvanized steel enclosure
- Installed in remote location

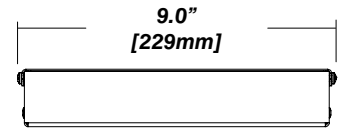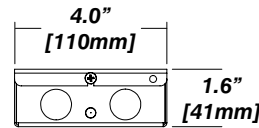

954 - Cylinder Driver Housing


- Supplied standard with every semi-recessed canopy
- Fits Standard, LCS or DIM drivers
- Extruded aluminum enclosure with strain relief to fixture
- Installed in ceiling beside canopy

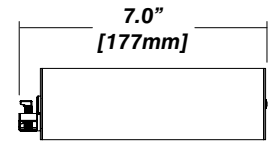

954 Driver Layouts

954 with Cylinder Driver Housing


- Installed in ceiling beside canopy
- Driver mounted inside cylinder
- Dimming control wired from Cylinder Driver Housing



954 with Cylinder Driver Housing

+ 910 Single Driver Housing

- Driver remotely mounted inside 910 housing
- Fed to 910 housing
- WAGO connector for DC side
- Thermal protector for high temperatures

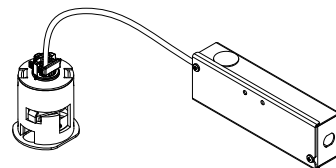

954 with Cylinder Driver Housing

+ 910 Double Driver Housing

- Driver remotely mounted inside 910 housing
- Fed to 910 housing
- WAGO connector for DC side
- Thermal protector for high temperatures

