

LineLED Flex 18 is a small profile, high output LED strip specially designed for installations with horizontal plan bend. Bending sections every 1.30" on center allow the LineLED Flex 18 to fit around tight curves.

Mounting
LLED strip is equipped with 3M™ adhesive transfer tape (9472LE).

Applications:
Indoor only - cove lighting, architectural reveals, under banister, general ambient lighting, etc.

Approvals
Class 2 damp listed

Operating voltage
24 VDC

Average life
50,000 hours


Warranty
5 years



Technical information

MODEL	LLFLEX18
LEDS/ft	18
Light output 3000K	300 lum/ft
Average power consumption (for 15' section)	2.65 W/ft
Ordering increment	4.00"
Pitch length	0.66"
Maximum run length (in series)	22 ft
Dimensions	0.39" W 0.05" H

PRODUCT DIMENSIONS

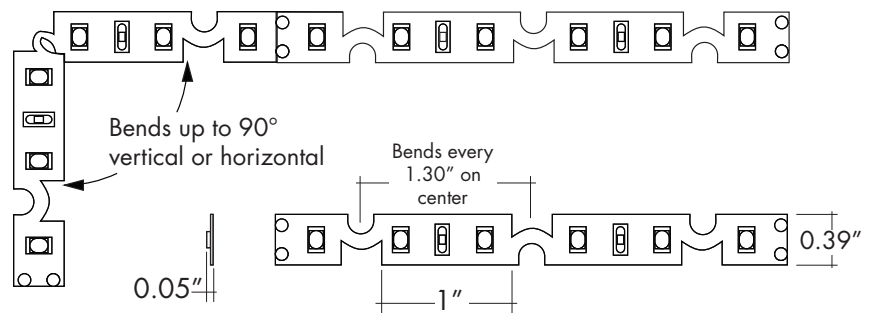

CCT INFO/LUMEN MULTIPLIER

Color temperature	Multiplier (referenced from 3000K)	CRI	R _f	R _g
2200K	0.87	82	81	99
2400K	0.73	98	95	101
2700K	0.81	98	95	102
3000K	1.00	91	90	101
3500K	1.05	95	90	97
4100K	1.28	93	88	96


TM-30-15

SECTION START/END OPTIONS

NC - No connector




LF - Power Feed lead Female 3" cable



SL - Soldered lead wire (72")



MF - Power Feed lead Male 3" cable



Ordering code

MODEL	COLOR TEMPERATURE	SECTION START	SECTION END	LENGTH
LLFLEX18	22K	SL	SL	4
LLFLEX18	22K - 2200K 24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 41K - 4100K	SL - Soldered lead wires (72") LF - Lead female MF - Lead male NC - No connector	SL - Soldered lead wires (72") LF - Lead female MF - Lead male NC - No connector	4" increments - up to 22'

Power consumption per linear foot

loads tested with PSD series of power supplies (page 4)


POWER CONSUMPTION PER FOOT

Length of strip (LF)	W/ft	Total wattage
1	3.35	3.35
2	3.35	6.70
3	3.30	9.90
4	3.25	13.00
5	3.20	16.00
6	3.15	18.90
7	3.10	21.70
8	3.05	24.40
9	3.00	27.00
10	2.95	29.50
11	2.90	31.90
12	2.80	33.60
13	2.75	35.75
14	2.70	37.80
15	2.65	39.75
16	2.60	41.60
17	2.55	43.35
18	2.50	45.00
19	2.45	46.55
20	2.40	48.00
21	2.35	49.35
22	2.30	50.60

Accessories


Part # CL-1

Mounting clip:
recommended at every 12" when
LineLED strip is facing down.




Part # LVSP-4T-BK

Splice Box:
low voltage, 4 terminal splice box, black.




Part # LL.ZIP

Strain Relief Clip




Lens options / light transmission percentage per lens


- C Clear
- HF Half (50%) Frosted
- G Graze
- SI Satin Ice
- S Square Frosted
- Q Rounded Square Frosted
- F Frosted
- M Medium beam frosted
- R Raised
- C36 Clear 36° beam angle
- C10 Clear 10° beam angle




- C
 - F
 - HF
 - C36
 - R
- 85% 55% 72% 83% 51%




- C
 - F
 - HF
 - C10
 - R
- 71% 42% 58% 67% 39%




- C
 - F
 - HF
 - C10
- 71% 42% 58% 67%




- F
 - SI
 - R
 - G
- 43% 56% 46% 67%




- C
 - F
 - HF
- 83% 55% 68%




- C
 - F
 - HF
- 74% 46% 61%




- S
 - Q
- 62% 63%




- C
 - F
 - HF
- 79% 58% 69%




- C
 - F
 - HF
- 85% 55% 72%




- C
 - F
 - HF
- 71% 42% 58%




- C
 - F
 - HF
- 83% 55% 68%




- C
 - F
 - HF
- 74% 46% 61%




- C
 - F
- 47% 44%



- C
 - F
- 75% 52%



- C
 - F
- 78% 43%



- C
 - F
 - HF
- 85% 63% 75%

Installation

All mounting channels are field cuttable using miter saw with circular blade suitable for cutting aluminum.

Ordering

Extrusions are sold separately. View respective specsheets for details on ordering extrusions and their accessories (endcaps, mounting brackets, etc).

Discontinued Extrusion Reference Link

<https://www.luminii.com/media/4351/extrusion-update.pdf>

LED Dotting per extrusion

using the frosted lens option


extrusion	LL18
KSC, KRSC, FL, ALC	CD
KMC, KRMC, K45MC	SD
KXLC, KRXLC	CD
KRLC, KRRLC	CD
WPC	CD
RO, ALS20	SD
BOSC	CD
CLAC	SD



Clear Dotting (CD) Slight Dotting (SD) NO Dotting (ND)


TM-30-15: Data

22K CCT




Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	79	-10%	0%
2	79	-8%	8%
3	70	-2%	14%
4	85	2%	8%
5	90	5%	5%
6	90	6%	-3%
7	84	-2%	-8%
8	89	-6%	-4%
9	85	-6%	3%
10	78	-6%	11%
11	77	2%	14%
12	79	6%	9%
13	88	8%	-7%
14	67	4%	-20%
15	84	0%	-10%
16	75	-7%	-14%

24K CCT




Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	97	-1%	0%
2	97	-1%	0%
3	97	0%	1%
4	95	-3%	-1%
5	96	-1%	2%
6	96	1%	3%
7	97	0%	1%
8	98	1%	0%
9	97	0%	2%
10	95	0%	3%
11	93	3%	4%
12	93	3%	1%
13	93	3%	-6%
14	92	2%	-4%
15	95	-1%	-1%
16	91	0%	-6%

27K CCT




Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	97	-1%	0%
2	98	0%	0%
3	96	0%	1%
4	96	-2%	0%
5	96	0%	2%
6	95	2%	2%
7	96	1%	0%
8	98	1%	-1%
9	98	0%	1%
10	95	0%	3%
11	92	2%	5%
12	93	3%	1%
13	95	2%	-3%
14	93	3%	-3%
15	96	0%	-1%
16	91	1%	-6%

30K CCT




Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	90	-4%	-1%
2	91	-4%	3%
3	86	-1%	7%
4	91	1%	5%
5	92	2%	3%
6	93	4%	-1%
7	92	0%	-4%
8	95	-1%	-2%
9	94	-3%	1%
10	87	-3%	6%
11	84	0%	10%
12	88	6%	4%
13	92	4%	-1%
14	88	6%	-6%
15	89	1%	-7%
16	85	0%	-11%

35K CCT



Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	91	-4%	0%
2	93	-3%	0%
3	92	-2%	2%
4	92	-3%	1%
5	91	-5%	1%
6	96	-1%	1%
7	92	-4%	1%
8	93	-3%	2%
9	90	-4%	5%
10	83	-3%	10%
11	83	2%	10%
12	89	3%	4%
13	95	2%	-1%
14	90	5%	-4%
15	90	1%	-5%
16	88	0%	-6%

41K CCT



Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	88	-4%	1%
2	93	-2%	1%
3	93	-2%	1%
4	89	-4%	-2%
5	88	-7%	-1%
6	93	-4%	0%
7	88	-7%	3%
8	87	-4%	6%
9	82	-3%	12%
10	79	0%	12%
11	83	5%	9%
12	91	4%	0%
13	89	3%	-6%
14	92	-1%	-3%
15	84	0%	-7%
16	84	-1%	-6%


Power supply

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.

Magnetic Low Voltage Dimming Power Supplies:

MODEL	POWER	OUTPUT	INPUT
PSD	48	24	
PSD - PSD Series dims down to 0%	48 - 48 Watt 96 - 96 Watt 288 - 288 Watt (3 x 96Watt)	24 - 24 VDC	Blank - 120 V 240 - 240 V 277 - 277 V


MODELS	PSD 48	PSD 96	PSD 288
A Length	11.25"	11.25"	13.06"
B Width	3.42"	3.42"	8.42"
C Depth	3.42"	3.27"	4.47"

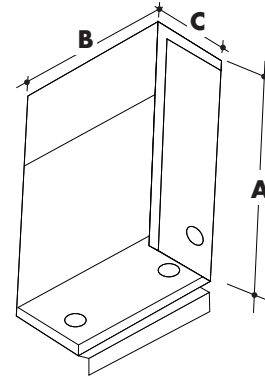

Electronic Low Voltage Dimming Power Supplies:

MODEL	POWER	OUTPUT
PDCL	30	24
PDCL - PURE DC LITE Dims to 1% on most MLV Dimmers NOTE: Must be loaded at least 10% of rated load to obtain optimal dimming.	30 - 30 Watt 60 - 60 Watt 96 - 96 Watt	24 - 24 VDC


MODELS	PSD 48	PSD 96	PSD 288
A Length	1.03"	1.03"	1.03"
B Width	6.50"	7.40"	8.66"
Depth	3.62"	3.62"	3.66"

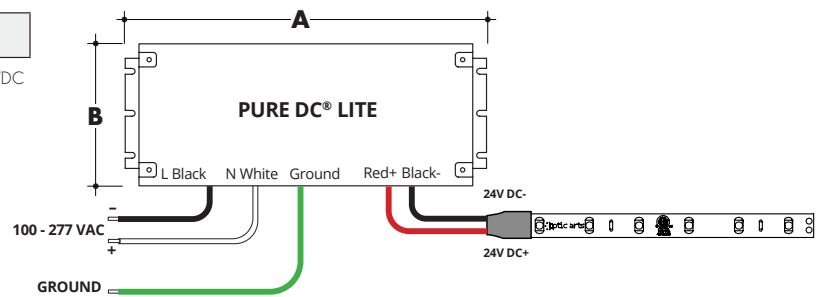

0-10V Dimming Power Supplies

MODEL	POWER	OUTPUT	DIMMING
PS010V	3X96	24	LIN
PS010V - 0-10V Power Supply dims down to 0%	96 - 96 Watt 3X96 - 3 X 96 Watt	24 - 24 VDC	LIN - Linear LOG - Logarithmic

MODELS	96W	3X96
A Length	14.40"	15.75"
B Width	5.20"	6.60"
C Depth	2.60"	4.80"

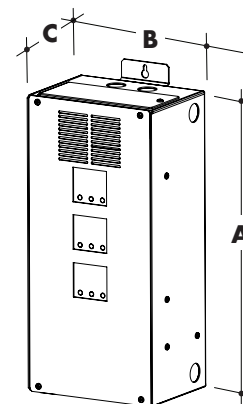

Power supply


See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.

DMX Dimming Power Supplies

MODEL	POWER	OUTPUT
PSDMX	96	24
PSD - DMX Power Supply	96 - 96 Watt 3X96 - 3 X 96 Watt	24 - 24 VDC

Features eldoLED's LINEARdrive configurable dimmable drivers

MODELS	96	3X96
A Length	14.40"	15.75"
B Width	5.20"	6.60"
C Depth	2.60"	4.80"

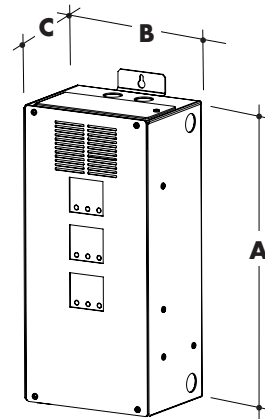


DALI Dimming Power Supplies

MODEL	POWER	OUTPUT
PSDALI	96	24
PSDALI - DALI Power Supply dims down to 0%	96 - 96 Watt 3X96 - 3 X 96 Watt	24 - 24 VDC

Features eldoLED's LINEARdrive configurable dimmable drivers

MODELS	96 W
A Length	14.40"
B Width	5.20"
C Depth	2.60"

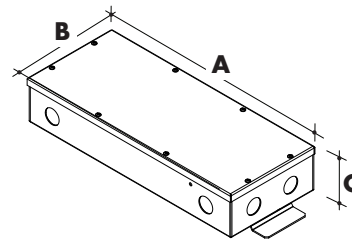


Luminii is a Lutron OEM Advantage Partner

MODEL
LTEA4U1UKL-CV240
Lutron - HiLume™ 1% 2-wire LED driver (120V forward phase only)


MODELS	LTEA	L3DA
A Length	4.89"	4.98"
B Width	2.66"	2.66"
C Depth	4.00"	4.00"

MODEL
L3DA4U1UKL-CV240
HiLume™ 1% EcoSystem Voltage LED driver



MODEL
L3D0-96W24V-U
HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™

MODELS	L3D0
A Length	10.50"
B Width	5.50"
C Depth	2.00"

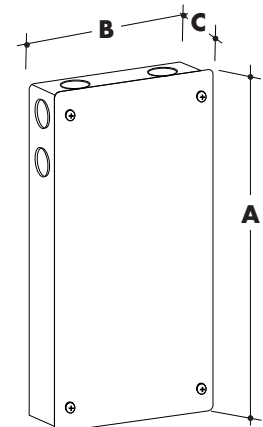


Power supply

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.

Enlighted Enabled Dimming Power Supplies:

MODEL	POWER	OUTPUT	DIMMING	LOCATION
PSV	96	24	ENL	D
PSV - PSV Series	96 - 96 Watt	24 - 24 VDC	ENL - Enlighted Dimming	D - Damp


MODELS	96 W
A Length	14.40"
B Width	5.20"
C Depth	2.60"

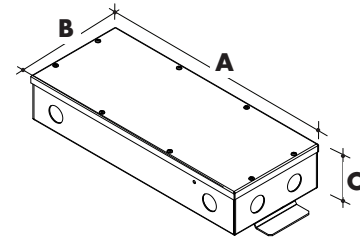

Non-Dimming Power Supply

MODEL	POWER	OUTPUT	DIMMING	LOCATION
PSV	96	24	U2ND	D
PSV - PSV Series	96 - 96 Watt	24 - 24 VDC	U2ND - Non Dimming	D - Dry Location


MODELS	96W
A Length	14.40"
B Width	5.20"
C Depth	2.60"

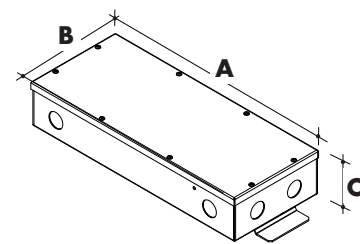

In ground, Electronic Low Voltage Dimming Power Supplies:

MODEL	POWER	OUTPUT	INPUT
IG-CVE	96X2	24	
IG-CVE - In ground CVE Series dims down to 0.1%	96X2 - 2 X 96 Watt	24 - 24 VDC	Blank - 120 V 277 - 240/277 V

MODELS	Dual circuit
A Length	8.00"
B Width	8.00"
C Depth	8.00"

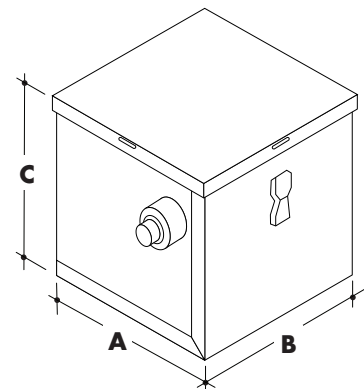

Power supply

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.

Universal Power Supply

MODEL	POWER	OUTPUT
PDCU	30	24
PDCU - PDCU Series	30 - 30 Watt 60 - 60 Watt 96 - 96 Watt 3x96 - 3x96 Watt	24 - 24 VDC

Compatible with Triac, MLV, ELV, 0-10V, & PWM Dimmers

MODELS	30W	60W	96W	3X96
A Length	6.50"	7.40"	8.66"	11.83"
B Width	3.73"	3.73"	3.73"	4.32"
C Depth	1.61"	1.61"	1.61"	1.81"

