


## Features

Class 2 0-10V controlled LED Driver features eldoLED's LINEARdrive configurable 0-10V driver rated at 96 watt each. Suitable For Damp Location.



## Technical information

### Input voltage

120-277V AC, 1.1A, 50/60Hz

### Output signal

24 VDC, 4.0 A

### Maximum wattage

96 watt circuits

### Mounting

Surface mounted with conduit access

### Dimming curve

Linear, Logarithmic

100% - 0% (HydraDrive)

### Dimming

0-10V (dimmer needs to be capable to dim to 0% without ON/OFF switch)

### Ambient Operating Temperature


-20C to +35C

### JA8 compliant


When used with models: LLDW36, LLDW52, or LLDW73STP

### Weight

3.8 lbs

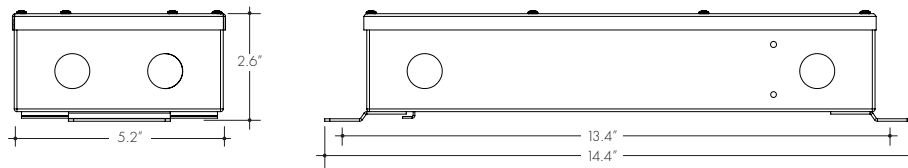

## Wiring diagram

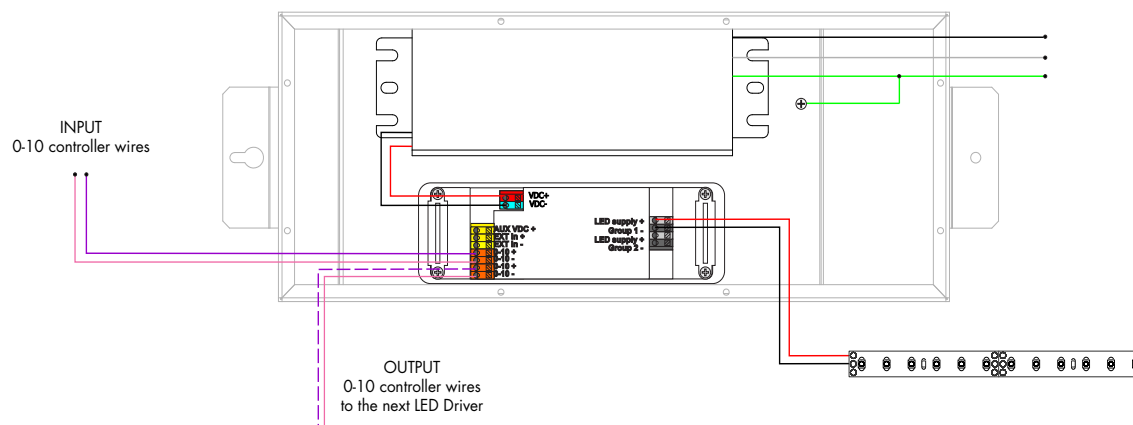

## Ordering code

MODEL	POWER	OUTPUT	DIMMING
<b>PS010V</b>	<b>96</b>	<b>24</b>	<b>LIN</b>
PS010V - 0-10V LED Driver	96 - 96 Watt	24 - 24 VDC	LIN - Linear LOG - Logarithmic