



Features

Class 2 0-10V controlled LED Driver features eldoLED's LINEARdrive configurable 0-10V driver rated at 96 watt each. Suitable For Damp Location.



PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043

Technical information

Input voltage

120-277V AC, 1.1A, 50/60Hz

Output signal

24 VDC, 4.0 A

Maximum wattage

96 watt circuits

Mounting

Surface mounted with conduit access

Dimming curve

Linear, Logarithmic

100% - 0% (HydraDrive)

Dimming

0-10V (dimmer needs to be capable to dim to 0% without ON/OFF switch)

Ambient Operating Temperature


-20C to +35C

JA8 compliant


When used with models: LLDW36, LLDW52, or LLDW73STP

Weight

3.8 lbs

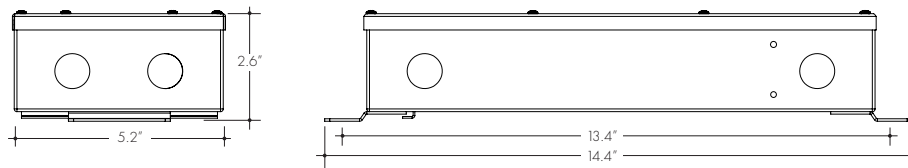

Wiring diagram

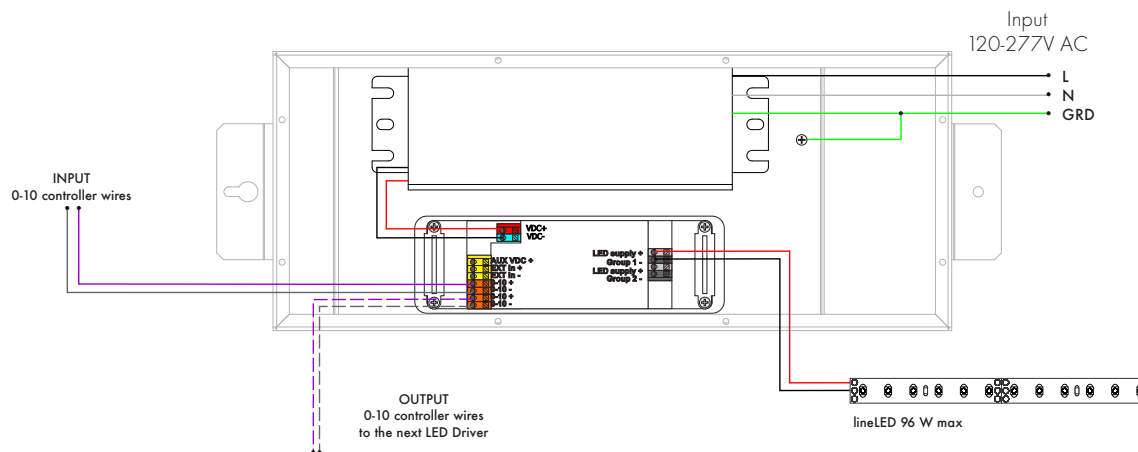

Ordering code

MODEL	POWER	OUTPUT	DIMMING
PS010V	96	24	LIN
PS010V - 0-10V LED Driver	96 - 96 Watt	24 - 24 VDC	LIN - Linear LOG - Logarithmic