



Features

- Class 2
- 0-10V controlled power supply features eldoLED's LINEARdrive configurable 0-10V drivers
- Suitable For Damp Location
- 5 year Warranty



PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043

Technical Information

Input voltage

120-277V AC, 3.3A, 50/60Hz

Output signal

24 VDC, 3 x 4.0 A

Maximum wattage

3 x 96 watt circuits

Mounting

Surface mounted with conduit access

Dimming curve

Linear, Logarithmic
100% - 0% (HydraDrive)

Dimming


0-10V (dimmer needs to be capable to dim to 0% without ON/OFF switch)

Ambient Operating Temperature


-20C to +35C

Weight

12.9 lbs

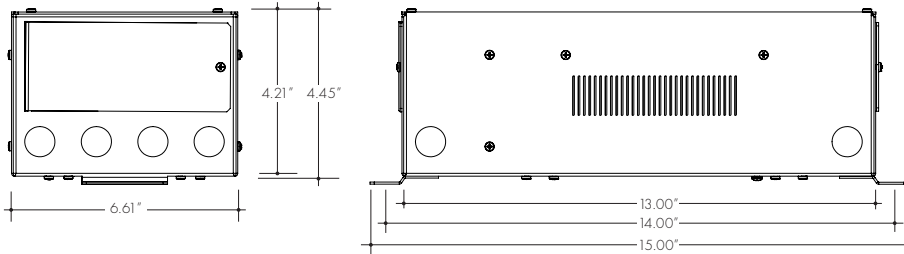

Wiring Diagram

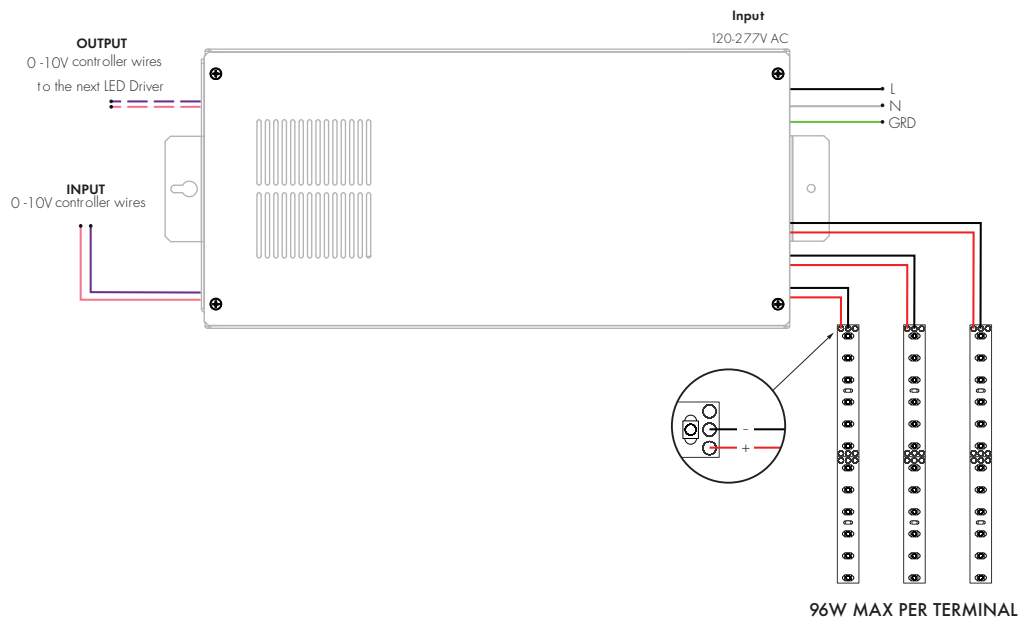

Ordering Code

MODEL	POWER	OUTPUT	DIMMING
PS010V - 0-10V LED Driver	3X96 - 3 x 96 Watt Circuits	24 - 24 VDC	LIN - Linear LOG - Logarithmic