
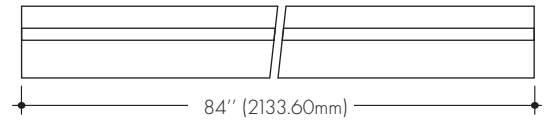



Small Anodized extrusions compatible with some OAX light engines.

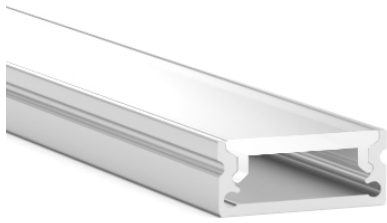

Technical information


Finish: Silver anodized

Diffuser lens: Acrylic, snap-in-place, UV resistant

Mounting: Direct Surface, Mounting Clip, Rotating Clip, Flex Connect Housing (see page 2)

		Lens Options	
Actual length	84" (2133.60mm)		
Available lenses	C	Clear	LN-07XXC-84-C
	HF	Half Frosted	LN-07XXC-84-HF
	F	Frosted	LN-07XXC-84-F

Ordering code



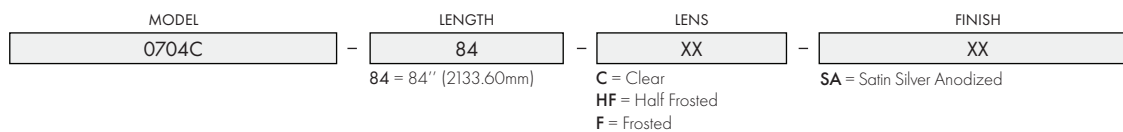


All accessories sold separately.

Accessories




EC-0704C-H0

Anodized Aluminum
End Cap






EC-0704C-H1

Anodized Aluminum
End Cap w/Hole






MC-07XXC

Mounting Clip



RC-07XXC

Rotating Mounting Clip



HG-0704C

Flex Connect Auxiliary Housing Accessory

