

LETO 11 Adjustable

ADJUSTABLE OPTIC PENDANT LED DOWNLIGHT



Leto 11 Adjustable - Adjustable Optic Pendant LED Downlight. Leto 11 Adjustable is a large cylinder LED pendant with an adjustable optic. It is the perfect pendant for placing your light exactly where you need it in your space without distracting from your design. 360 degree rotation and up to 30 degree total tilt gives you the flexibility to customize your space however you want.

Ordering Code

Fixture	895							
	1	2	3	4	5	6	7	8
Driver							--	--
	1	2	3	4	5	6	7	8

Product Specifications

SAMPLE: Fixture **895 - A90 - 610 - 27 - 07 - AR - 08 - 02** | Driver **952 - 08 - 00 - 01 - LCS - 120 - A90 - 07**

1 - Model	2 - LED	3 - Optic	4 - CCT	5 - Lumen	6 - Accessory*2
895 · Leto 11 Adjustable	A90 · 93+ CRI Accuracy	610 · 10° TIR*1 618 · 18° 630 · 30° 645 · 45° 660 · 60°	25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K	07 · 700 (6.1W) 10 · 1000 (9.1W) 15 · 1500 (14W) 20 · 2000 (19.8W)*1 30 · 3000 (31.8W) 35 · 3500 (34.6W)	00 · No Accessory DL · Diffusing Foil HO · Honeycomb SL · Solite Lens

7 - Body Color		8 - Baffle Color		1 - Canopy Style	2 - Canopy Color		3 - Suspension (6' incl.)
<i>Standard</i>	<i>Premium</i>	<i>Standard</i>	<i>Premium</i>	951 · Round 951F · Round Flangeless 952 · Square	<i>Standard</i>	<i>Premium</i>	02 · 2 Aircraft + Feed Cable 03 · Solid Stem (6' MAX) 04 · Hang Straight Solid Stem 05 · 2 Powered Aircraft*8 <i>Contact Senso for custom length</i>
01 · White 02 · Black 08 · Silver	52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL	01 · White 02 · Black 08 · Silver	52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL		01 · White 02 · Black 08 · Silver	52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL	

4 - Feed Cable	5 - Driver	Dim Level	Dim Level	6 - Voltage	7 - LED	8 - Lumen
00 · None*8 01 · White 02 · Black 03 · Clear XX · Custom	STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase*3 ELDOLC · EldoLED 0 - 10 Volt*4 DALI · Dali Protocol*4	N/A 1% 1% 0.1% 0.1%	LUTES · Hilume Ecodigital*4 LUT2W · 2 Wire for phase*3/4 DMX · Senso*5 EMG · Emergency Driver*5/6 CSMB · Casambi Wireless Control*5/6	1% 1% 	120 · 120V 277 · 277V 347 · 347V*7	Same as Fixture Same as Fixture

*1 TIR 2000lm MAX
*2 confirm accessories with Senso
*3 120V only
*4 requires square canopy

*5 remote mount
*6 second driver required
*7 not available with ELDO, Lutron or DMX
*8 no feed cable color option for **05** - 2 Powered Aircraft



LETO 11 Adjustable

ADJUSTABLE OPTIC PENDANT LED DOWNLIGHT

Canopy / Suspension

Round Canopy: W - Ø5.17" [131.24 mm] / H - 2.36" [60mm]

Drivers mounted in the Round Canopy: **STD, LCS, DIM**

Drivers remote mounted: **ELDOLC, DALI, LUTES, LUTW2, DMX, EMG, CSMB**

Square Canopy: W/L - 5.67" [144mm] / H - 2.28" [58mm]


Drivers mounted in the Square Canopy: **STD, LCS, DIM, ELDOLC, DALI, LUTES**

Drivers remote mounted: **DMX, EMG, CSMB**

Round Flangless: W - Ø2.53" [64.25 mm]

All drivers remote mount

**2 Aircraft Cable
w/ Feed Cable**



**2 Powered
Aircraft Cable**



Solid Stem



**Hang Straight
Solid Stem (MAX 30°)**



Reflectors

Senso metal spun faceted reflectors are specifically designed to retain as much light as possible. This results in a more power efficient fixture with a higher delivered lumen.

Faceted Reflector



Accessories

Diffusing Lens



Honeycomb Mesh



Solite Lens




Installation

- The included canopy fits on a standard junction box
- Height adjustable aircraft cable, feed cable or solid stem suspension (specify height) included
- Electrical feed cable included
- 360 degree rotation with up to 30 degrees of tilt

Construction / Finish

- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Aluminum extruded Body
- Made in Canada

Dimensions

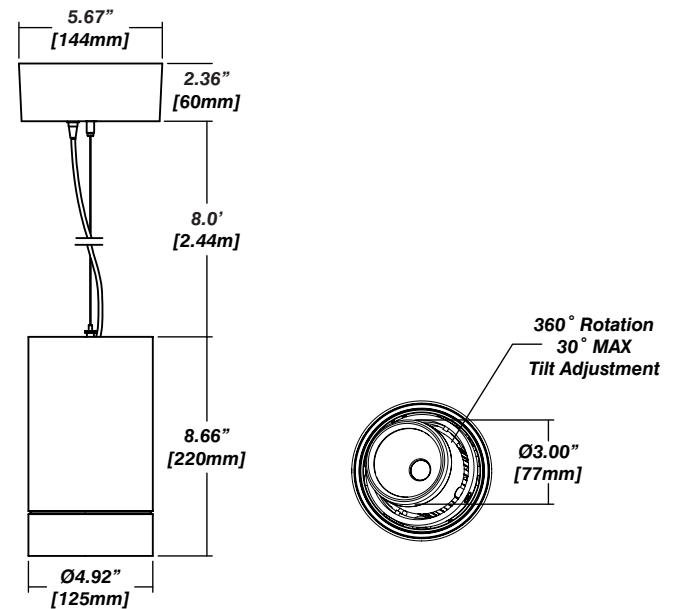

LETO 11 Adjustable



ADJUSTABLE OPTIC PENDANT LED DOWNLIGHT

Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See Sensolighting.com for more information.

**Full photometric Reports and IES files available for every configuration*

Color Metrics

TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

**Full Color Metric Info Available at Sensolighting.com*

LED Module Performance

Output: Up to 113 lumen/Watt

Efficacy: Color consistency within a 3-MacAdam Ellipse

CCT: 2500K - 6500K

Color Rendering: 93+ CRI

Min. R Values: R⁹ - 60 R^f - 90 R^a - 100

Driver and Power Consumption


Dimming: 1% dimming standard with 0.1% option
Casambi wireless control available

Ripple: Industry leading Low ripple

Efficiency: Power Factor >0.9
Efficiency over 85%
Class 2 output for safety

Installation: Remote mounted

Leto Light Distribution: Reflector

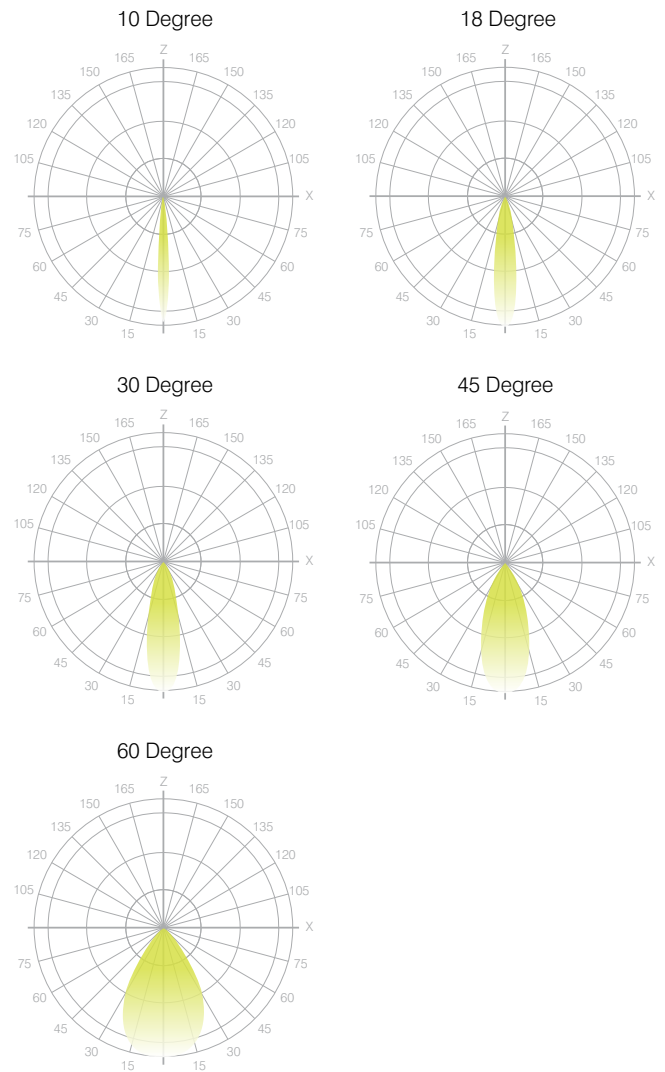

Lumen Option	700lm	1000lm	1500lm	2000lm	3000lm	3500lm
Fixture Wattage	6.1W	9.1W	14W	19.8W	31.8W	34.6W
Delivered Lumen	656lm	1035lm	1539lm	1917lm	2986lm	3518lm