



PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043

### Features

- Wireless Enabled DALI-2 Type 8 (DT8) control for 3-wire applications via Lutron Athena
- Class 2
- Features EldoLED's LINEARdrive
- Suitable for Dry locations
- Must be connected to Lutron Athena Control System
- 5 Year warranty
- Digital wireless control communication for a dynamic lighting control system for smart buildings and human-centric experiences
- Factory Installed Lutron Athena Wireless Node - simplifying set up time, enabling straightforward programming via the Lutron Designer software Application

### Features

**Input voltage**

120-277V AC, 1.1A, 50/60Hz

**Output signal**

24 VDC, 4.0 A

**Maximum wattage**

96 watt circuits

**Ambient Operating Temperature**

-20°C - 35°C

**Dimming**

DALI dimming, 100% - 0.1% (Lutron Athena)

**Weight**

4.1 lbs

**Mounting**

Surface mounted with conduit access

**Athena Node**


Lutron Athena Controllable for DALI-2 DT8

**Athena Radio Frequency**


2.4 GHz

**Athena Range**

Each Athena wireless node should be installed within 25ft of two or more Athena wireless nodes

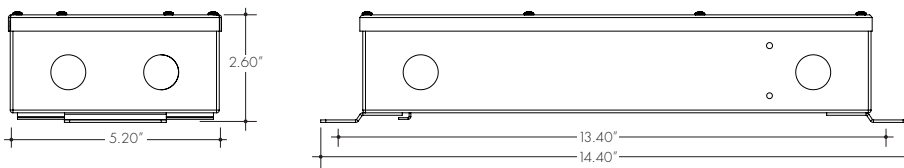

### Wiring Diagram

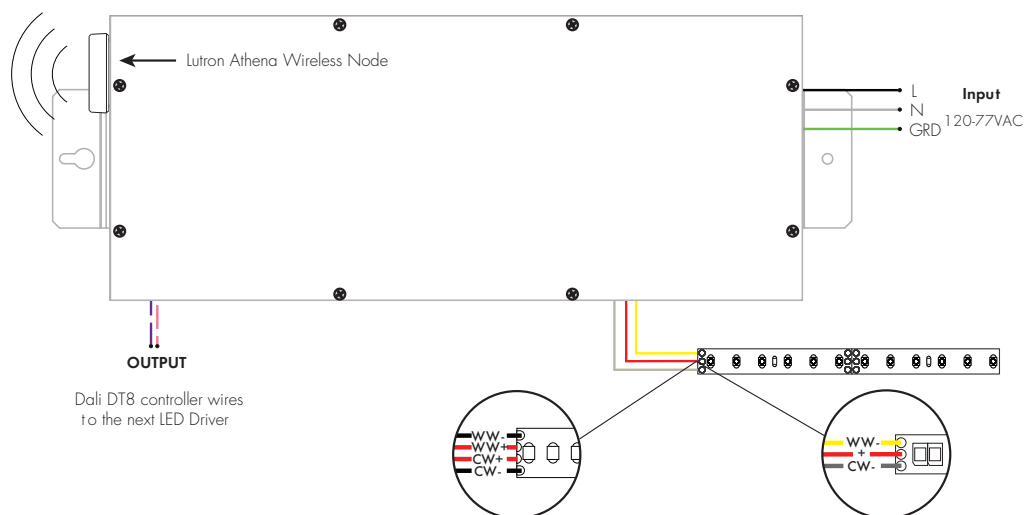

### Ordering Code

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	DALI-DT8 - DALI DT8 Tunable White	D - Dry	96 - 96 W	24 - 24 VDC	AWNR - Athena