


NARROW

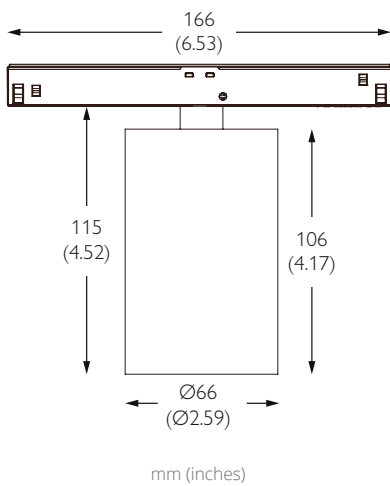

TECHNICAL DESCRIPTION

Solo 16 Stucchi is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The narrow beam in our 8.40W 700lm module has a peak intensity of 15476cd. An accessory holder is available separately that can accommodate 55mm (2.16") lenses and louvers. This product requires an external 48V Constant Voltage LED power supply.

MECHANICAL & ELECTRICAL

CATEGORY IP20
MATERIAL Machined AL 6063-T6 | Machined Brass
PAN 360°
TILT 90°
LOCKABLE Pan
WEIGHT 395g 570g* | 0.87lb 1.25lb*
WATTAGE 8.40W
FORWARD VOLTAGE 48V
SUPPLY TYPE Constant Voltage
DRIVER LOCATION Remote AC to 48VDC
DIMMING DALI

MOUNTING

MOUNTING 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended

FINISHES


FINISHES Brushed Aluminium | Black RAL9005 | Traffic White RAL9016 | Rubbed Bronze* | Polished Brass* | Satin Brass*
 *Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

OPTICAL & STANDARDS

NOMINAL LUMENS 700lm
DELIVERED LUMENS 653lm
COLOUR TEMPERATURE 2700K | 3000K
ACCESSORY HOLDER Separate
ACCESSORIES Lenses | Louver 55mm (2.16")
BEAM ANGLE 10°
CRI 92 TYP
TM-30 RF: 90 RG: 99
WARRANTY 5 Years
STANDARDS



Photometry shown is for 3000K module. Please enquire for other CCT photometry. L90 50,000 hours.

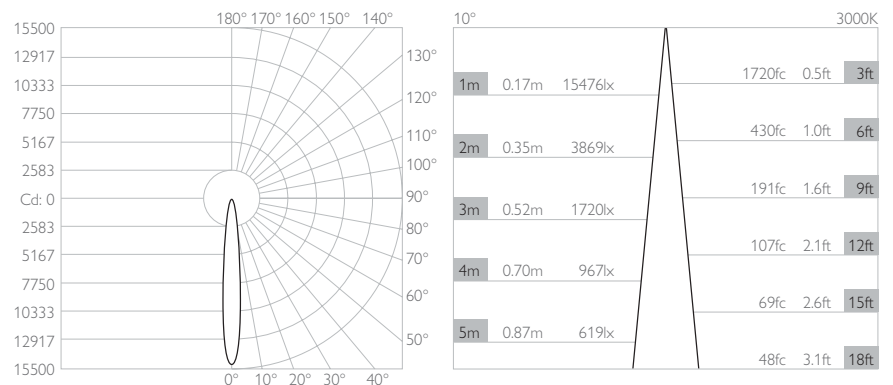

LUMINAIRE FINISH


	White 9016	Black 9005	Brushed Aluminium	Rubbed Bronze*	Polished Brass*	Brushed Brass*	
TRACK & ADAPTOR	White 9016	1052-TW-XX9210	1052-TW-BK-XX9210	1052-TW-AL-XX9210	1052-TW-RB-XX9210	1052-TW-PB-XX9210	1052-TW-SB-XX9210
	Black 9005	1052-BK-TW-XX9210	1052-BK-XX9210	1052-AL-XX9210	1052-RB-XX9210	1052-PB-XX9210	1052-SB-XX9210

*All premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ

For 3000K Substitute XX with 30

For 2700K Substitute XX with 27

MEDIUM

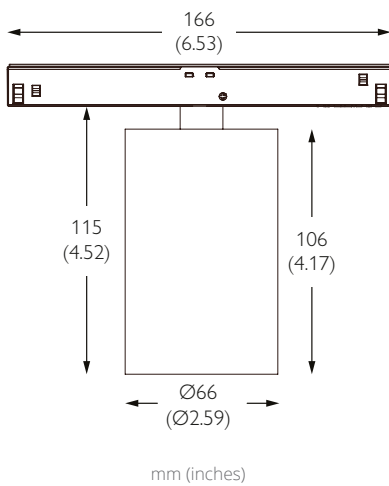

TECHNICAL DESCRIPTION

Solo 16 Stucchi is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The medium beam in our 8.40W 700lm module has a peak intensity of 5671cd. An accessory holder is available separately that can accommodate 55mm (2.16") lenses and louvers. This product requires an external 48V Constant Voltage LED power supply.

MECHANICAL & ELECTRICAL

CATEGORY IP20	WATTAGE 8.40W
MATERIAL Machined AL 6063-T6 Machined Brass	FORWARD VOLTAGE 48V
PAN 360°	SUPPLY TYPE Constant Voltage
TILT 90°	DRIVER LOCATION Remote AC to 48VDC
LOCKABLE Pan	DIMMING DALI
WEIGHT 395g 570g* 0.87lb 1.25lb*	

MOUNTING

MOUNTING 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended

FINISHES

FINISHES Brushed Aluminium | Black RAL9005 | Traffic White RAL9016 | Rubbed Bronze* | Polished Brass* | Satin Brass*


*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

OPTICAL & STANDARDS

NOMINAL LUMENS 700lm	BEAM ANGLE 16°
DELIVERED LUMENS 623lm	CRI 92 TYP
COLOUR TEMPERATURE 2700K 3000K	TM-30 RF: 90 RG: 99
ACCESSORY HOLDER Separate	WARRANTY 5 Years
ACCESSORIES Lenses Louver 55mm (2.16")	STANDARDS



Photometry shown is for 3000K module. Please enquire for other CCT photometry. L90 50,000 hours.

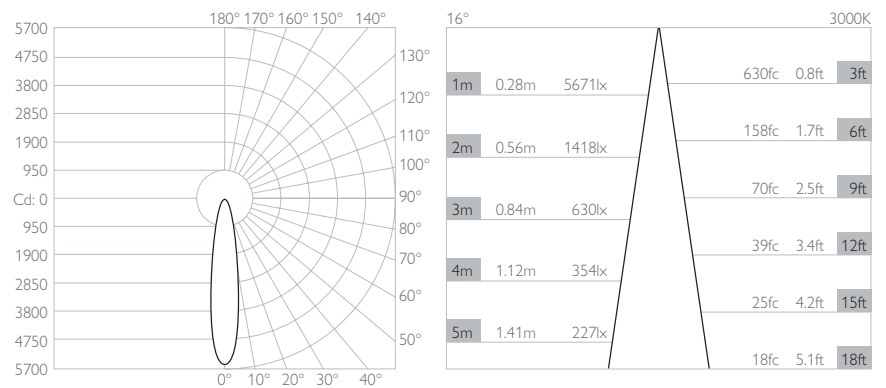

LUMINAIRE FINISH


	White 9016	Black 9005	Brushed Aluminium	Rubbed Bronze*	Polished Brass*	Brushed Brass*
TRACK & ADAPTOR	White 9016	Black 9005				
	1052-TW-XX9215	1052-TW-BK-XX9215	1052-TW-AL-XX9215	1052-TW-RB-XX9215	1052-TW-PB-XX9215	1052-TW-SB-XX9215
		1052-BK-TW-XX9215	1052-BK-XX9215	1052-AL-XX9215	1052-RB-XX9215	1052-PB-XX9215
			1052-SB-XX9215			

*All premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ

For 3000K Substitute XX with 30

For 2700K Substitute XX with 27

FLOOD

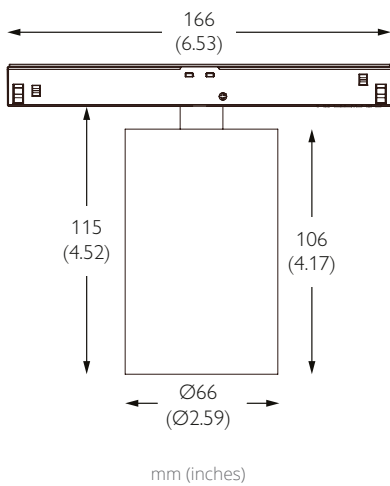

TECHNICAL DESCRIPTION

Solo 16 Stucchi is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The flood beam in our 8.40W 700lm module has a peak intensity of 1652cd. An accessory holder is available separately that can accommodate 55mm (2.16") lenses and louvers. This product requires an external 48V Constant Voltage LED power supply.

MECHANICAL & ELECTRICAL

CATEGORY IP20	WATTAGE 8.40W
MATERIAL Machined AL 6063-T6 Machined Brass	FORWARD VOLTAGE 48V
PAN 360°	SUPPLY TYPE Constant Voltage
TILT 90°	DRIVER LOCATION Remote AC to 48VDC
LOCKABLE Pan	DIMMING DALI
WEIGHT 395g 570g* 0.87lb 1.25lb*	

MOUNTING

MOUNTING 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended

FINISHES

FINISHES Brushed Aluminium | Black RAL9005 | Traffic White RAL9016 | Rubbed Bronze* | Polished Brass* | Satin Brass*


*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

OPTICAL & STANDARDS

NOMINAL LUMENS 700lm	BEAM ANGLE 30°
DELIVERED LUMENS 637lm	CRI 92 TYP
COLOUR TEMPERATURE 2700K 3000K	TM-30 RF: 90 RG: 99
ACCESSORY HOLDER Separate	WARRANTY 5 Years
ACCESSORIES Lenses Louver 55mm (2.16")	STANDARDS



Photometry shown is for 3000K module. Please enquire for other CCT photometry. L90 50,000 hours.

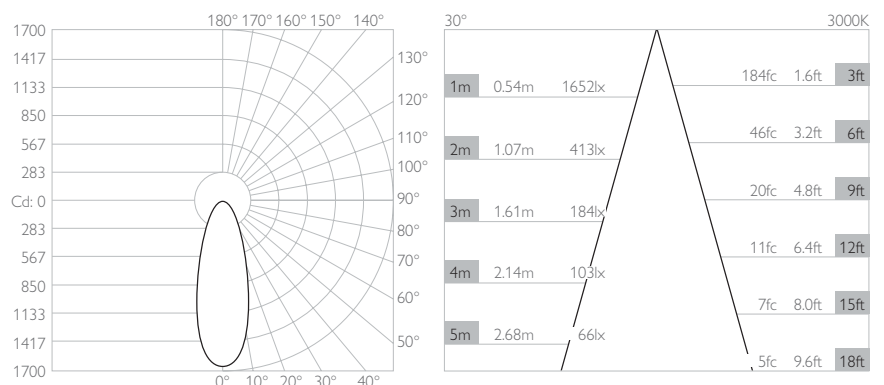

LUMINAIRE FINISH

	White 9016	Black 9005	Brushed Aluminium	Rubbed Bronze*	Polished Brass*	Brushed Brass*
TRACK & ADAPTOR	White 9016	Black 9005				
	1052-TW-XX9230	1052-TW-BK-XX9230	1052-TW-AL-XX9230	1052-TW-RB-XX9230	1052-TW-PB-XX9230	1052-TW-SB-XX9230
		1052-BK-TW-XX9230	1052-BK-XX9230	1052-AL-XX9230	1052-RB-XX9230	1052-PB-XX9230
			1052-SB-XX9230			


*All premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ

For 3000K Substitute XX with 30

For 2700K Substitute XX with 27

SOLO 16 STUCCHI

WIDE FLOOD

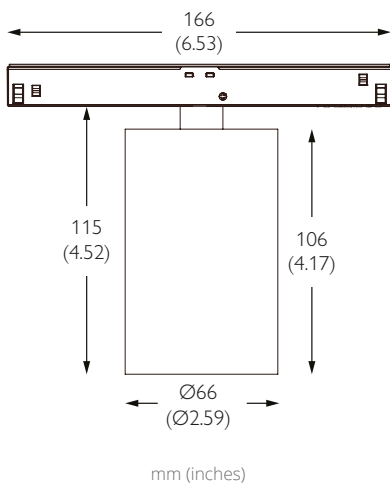

TECHNICAL DESCRIPTION

Solo 16 Stucchi is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The wide flood beam in our 8.40W 700lm module has a peak intensity of 633cd. An accessory holder is available separately that can accommodate 55mm (2.16") lenses and louvers. This product requires an external 48V Constant Voltage LED power supply.

MECHANICAL & ELECTRICAL

CATEGORY IP20	WATTAGE 8.40W
MATERIAL Machined AL 6063-T6 Machined Brass	FORWARD VOLTAGE 48V
PAN 360°	SUPPLY TYPE Constant Voltage
TILT 90°	DRIVER LOCATION Remote AC to 48VDC
LOCKABLE Pan	DIMMING DALI
WEIGHT 395g 570g* 0.87lb 1.25lb*	

MOUNTING

MOUNTING 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended

FINISHES


FINISHES Brushed Aluminium | Black RAL9005 | Traffic White RAL9016 | Rubbed Bronze* | Polished Brass* | Satin Brass*
*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.

OPTICAL & STANDARDS

NOMINAL LUMENS 700lm	BEAM ANGLE 50°
DELIVERED LUMENS 605lm	CRI 92 TYP
COLOUR TEMPERATURE 2700K 3000K	TM-30 RF: 90 RG: 99
ACCESSORY HOLDER Separate	WARRANTY 5 Years
ACCESSORIES Lenses Louver 55mm (2.16")	STANDARDS



Photometry shown is for 3000K module. Please enquire for other CCT photometry. L90 50,000 hours.

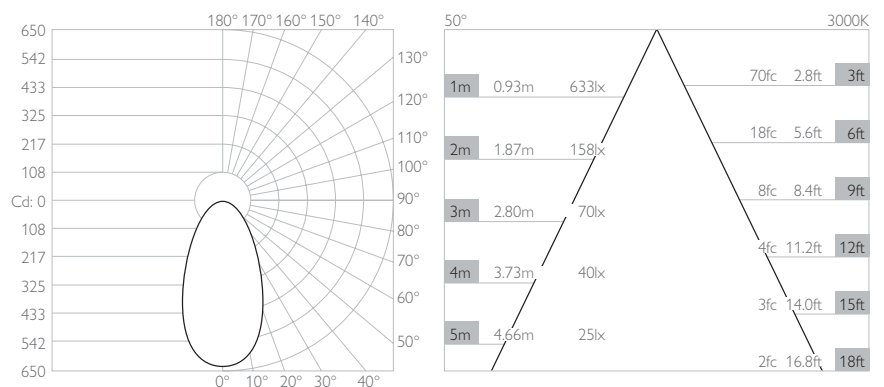

LUMINAIRE FINISH

	White 9016	Black 9005	Brushed Aluminium	Rubbed Bronze*	Polished Brass*	Brushed Brass*
TRACK & ADAPTOR	White 9016	Black 9005				
	1052-TW-XX9255	1052-TW-BK-XX9255	1052-TW-AL-XX9255	1052-TW-RB-XX9255	1052-TW-PB-XX9255	1052-TW-SB-XX9255
		1052-BK-TW-XX9255	1052-BK-XX9255	1052-AL-XX9255	1052-RB-XX9255	1052-SB-XX9255

*All premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ

For 3000K Substitute XX with 30

For 2700K Substitute XX with 27