

# ARTEMIS 2 D Wet

WET RATED RECESSED FIXED LED DOWNLIGHT



**Artemis 2 D WET - Wet Rated Recessed Fixed Downlight.** Artemis 2 D Wet features Senso-designed reflectors and a wide range of color temperatures in a high performance yet efficient and compact package. As part of the Artemis family of downlights, it's easy to get a cohesive design regardless of fixture size or style.

## Ordering Code

Fixture	<b>AR2D</b>	<b>WR</b>							
	1	2	3	4	5	6	7	8	9
Driver		<b>AR2D</b>	<b>WR</b>			--	--		
	1	2	3	4	5	6	7		

## Product Specifications

**SAMPLE:** Fixture **AR2D - WR - A90 - 615 - 25 - 07 - DL - 02 - 08** | Driver **915 - AR2D - WR - STD - 120 - A90 - 07**

1 - Model	2 - Trim	3 - LED	4 - Optic	5 - CCT	6 - Lumen	7 - Accessory	8 - Trim Color
<b>AR2D</b> · Artemis 2 Downlight	<b>WR</b> · Wet Rated	<b>A90</b> · Accuracy	<b>615</b> · 15° <b>630</b> · 30° <b>645</b> · 45° <b>660</b> · 60°	<b>25</b> · 2500K <b>27</b> · 2700K <b>30</b> · 3000K <b>35</b> · 3500K <b>40</b> · 4000K <b>65</b> · 6500K	<b>07</b> · 700 (7.7W) <b>10</b> · 1000 (10.9W) <b>15</b> · 1500 (16.8W) <b>20</b> · 2000 (25.7W)	<b>DL</b> · Diffusing Lens	<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <b>XX</b> · Custom
9 - Baffle Color	1 - Housing Style	2 - Model	3 - Trim	4 - Driver	Dim Level	Dim Level	Dim Level
<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <b>XX</b> · Custom	<b>915</b> · New Construction <b>920</b> · IC Housing*1	Same as Fixture	Same as Fixture	<b>STD</b> · Non Dimming <b>LCS</b> · 0 - 10 Volt Protocol <b>DIM</b> · Phase*2,3 <b>ELDOLC</b> · EldoLED 0 - 10 Volt <b>DALI</b> · Dali Protocol	N/A 1% 1% 0.1% 0.1%	<b>LUTES</b> · Hilume Ecodigital <b>LUT2W</b> · 2 Wire for phase*3 <b>LUT5S</b> · 5 Series Eco System <b>DMX</b> · Senso*4 <b>EMG</b> · Emergency Driver*4,5	1% 1% 5%
5 - Voltage	6 - LED	7 - Lumen	*1 Cannot exceed <b>1500lm</b> *2 Only available in <b>1000lm</b> and <b>1500lm</b> *3 Not available in 277V *4 Remote mounted *5 Specified separately				
<b>120</b> · 120V <b>277</b> · 277V <b>347</b> · 347V	Same as Fixture	Same as Fixture	Project : _____ Quantity : _____ Type : _____ Notes : _____				

# ARTEMIS 2 D Wet

WET RATED RECESSED FIXED LED DOWNLIGHT



## Light Engine

- Output:** up to 2000lm
- High Efficacy:** up to 150 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K or 6500K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 90 CRI & 50+ R9 Value

## Driver

- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9  
Efficiency over 85%  
Class 2 output for safety
- Installation:** Small Footprint allows retrofit installations


## Installation

- For new and retrofit installations
- Simple connection between fixture and driver via quick connect

## Construction / Finish


- Satin powder coated finish
- Custom finishes are available
- Cast Aluminum Trim
- Made in Canada

## Dimensions

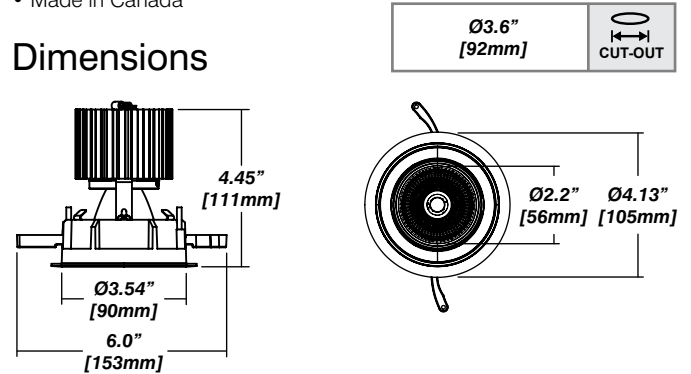

## Reflector

Faceted Reflector

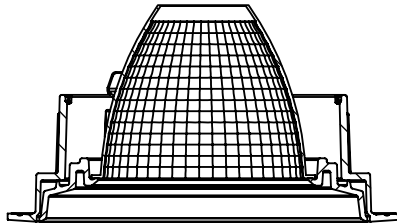


# ARTEMIS 2 D Wet

WET RATED RECESSED FIXED LED DOWNLIGHT




## Housing Options

### New Construction - 915

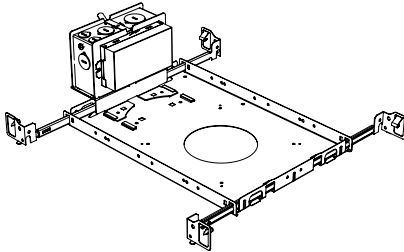


### Dimension

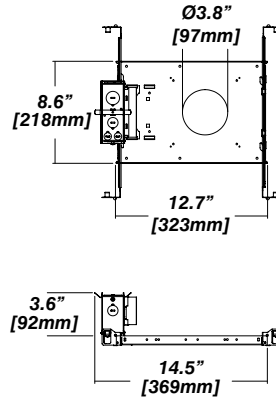


### Included

- Plaster Frame** • Galvanized steel construction with cut-out
- Bar hanger** • Length: from 14-3/16" to 26"
- Outlet Box** • Outlet Box Included

### IC Housing - 920

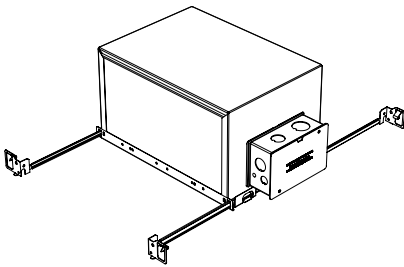

### Dimension

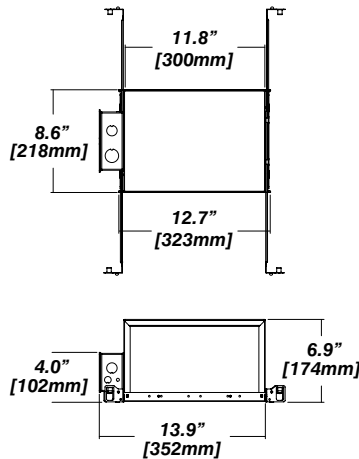

### Included

- IC Housing** • Galvanized steel construction
- Airtight
- Includes gasketed junction box
- Plaster Frame** • Galvanized steel construction
- Bar hanger** • Length: from 14-3/16" to 26"

**Note:** use only with LED modules up to 1500lm