

ARTEMIS 3 WD

RECESSED DOWNLIGHT W/ WARM DIM

Light Engine


- Output:** up to 3000lm
- High Efficacy:** up to 98 lumen/Watt
- Color Temperature (CCT):** 3000K dimmed to 1800K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 90 CRI

Driver

- Dimming:** 1% dimming standard with 0.1% option
Dimmer switch must be capable of dimming less than 5% (Lutron DIVA is recommended)
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9
Efficiency over 85%
Class 2 output for safety
- Installation:** Small Footprint allows retrofit installations

Reflector

Faceted Reflector

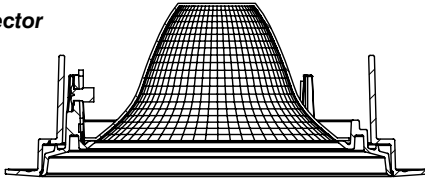


Installation


- For new and retrofit installations
- Simple connection between fixture and driver via quick connect

Construction / Finish


- Satin powder coated finish
- Custom finishes are available
- Cast Aluminum Trim
- Made in Canada




Artemis 3 Fixed Downlight

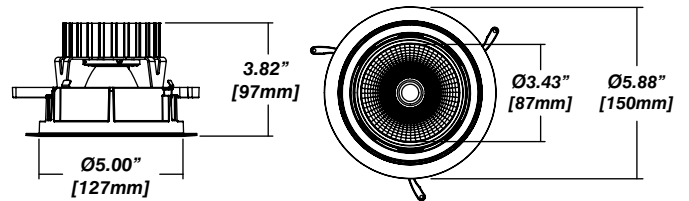

Artemis 3 Adjustable

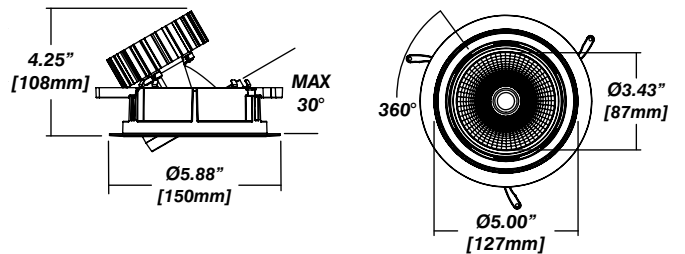

Artemis 3 Wall Wash

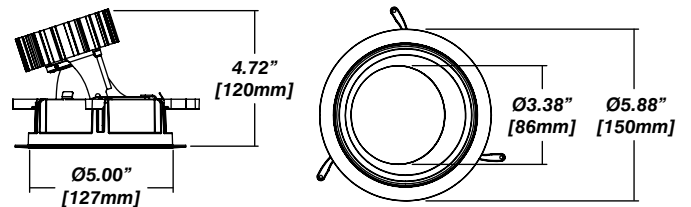



ARTEMIS 3 WD

RECESSED DOWNLIGHT W/ WARM DIM



Housing Options

Standard Senso Housing - 910

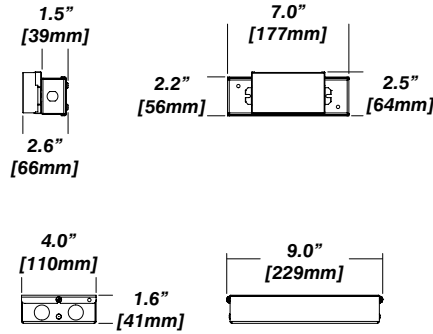
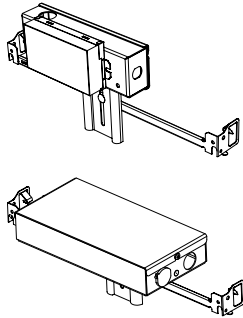


Included

Unless specified otherwise, this is provided as standard

- Driver with enclosure**
 - Galvanized steel enclosure
- Installation**
 - Laying on top of ceiling
 - Remote from fixture
 - Hanger bar and mount included



New Construction - 915

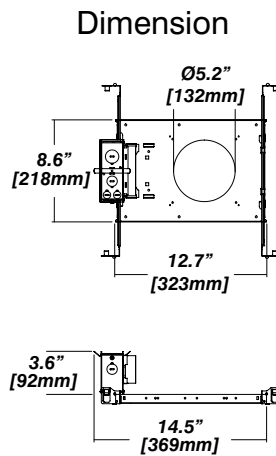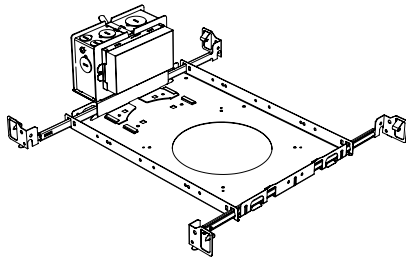

Included

- Plaster Frame**
 - Galvanized steel construction with cut-out
- Bar hanger**
 - Length: from 14-3/16" to 26"
- Outlet Box**
 - Outlet Box Included

IC Housing - 920

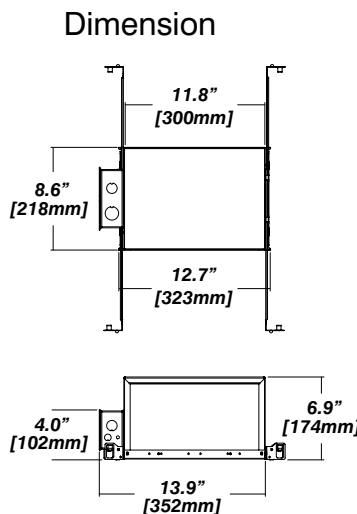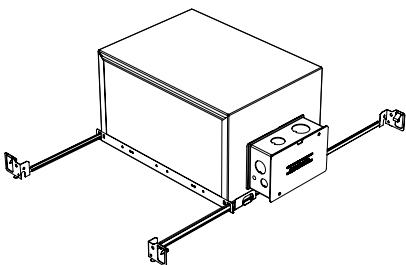

Included

- IC Housing**
 - Galvanized steel construction
 - Airtight
 - Includes gasketed junction box
- Plaster Frame**
 - Galvanized steel construction
- Bar hanger**
 - Length: from 14-3/16" to 26"

Note: use only with LED modules up to 1500lm

