


ARTEMIS 3 D Wet

WET RATED RECESSED FIXED LED DOWNLIGHT

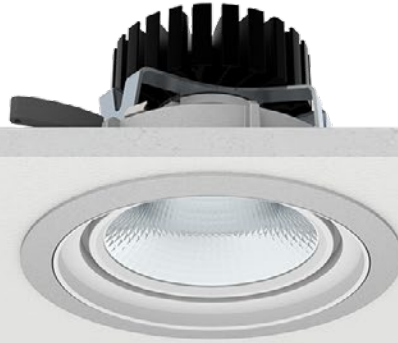

Artemis 3 D Wet - Wet Rated Recessed LED Downlight. Artemis 3 D Wet features Senso-designed reflectors and a wide range of color temperatures in a high performance yet efficient and compact package. As part of the Artemis family of downlights, it's easy to get a cohesive design regardless of fixture size or style.

Ordering Code

Fixture	AR3D	WR							
	1	2	3	4	5	6	7	8	9
Driver		AR3D	WR			--	--		
	1	2	3	4	5	6	7		

Product Specifications

SAMPLE: Fixture **AR3D - WR - A90 - 610 - 25 - 10 - DL - 02 - 08** | Driver **915 - AR3D - FL - STD - 120 - A90 - 07 - 08**

1 - Model	2 - Trim	3 - LED	4 - Optic	5 - CCT	6 - Lumen	7 - Accessory	8 - Trim Color
AR3D · Artemis 3 Downlight	WR · Wet Rated	A90 · Accuracy	610 · 10° 618 · 18° 630 · 30° 645 · 45° 660 · 60°	25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K	10 · 1000 (9.3W) 15 · 1500 (14.3W) 20 · 2000 (20.2W) 30 · 3000 (32.7W)	DL · Diffusing Lens	01 · White 02 · Black 08 · Silver XX · Custom

9 - Baffle Color	1 - Housing Style	2 - Model	3 - Trim	4 - Driver	Dim Level	Dim Level
01 · White 02 · Black 08 · Silver XX · Custom	915 · New Construction 920 · IC Housing ^{*1}	Same as Fixture	Same as Fixture	STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase ^{*2/3} ELDOLC · EldoLED 0 - 10 Volt DALI · Dali Protocol	N/A 1% 1% 0.1% 0.1%	LUTES · Hilume Ecodigital 1% LUT2W · 2 Wire for phase ^{*3} 1% LUT5S · 5 Series Eco System 5% DMX · Senso ^{*4} EMG · Emergency Driver ^{*4/5}

5 - Voltage	6 - LED	7 - Lumen	
120 · 120V 277 · 277V 347 · 347V	Same as Fixture	Same as Fixture	^{*1} Cannot exceed 1500lm ^{*2} Not available in 3000lm ^{*3} Not available in 277V ^{*4} Remote mounted ^{*5} Specified separately

Project : _____
 Quantity : _____
 Type : _____
 Notes : _____

ARTEMIS 3 D Wet

WET RATED RECESSED FIXED LED DOWNLIGHT



Light Engine

- Output:** up to 3000lm
- High Efficacy:** up to 150 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K or 6500K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 90 CRI & R9 Value of 50+

Driver

- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9
Efficiency over 85%
Class 2 output for safety
- Installation:** Small Footprint allows retrofit installations


Installation

- For new and retrofit installations
- Simple connection between fixture and driver via quick connect

Construction / Finish


- Satin powder coated finish
- Custom finishes are available
- Cast Aluminum Trim
- Made in Canada

Dimensions

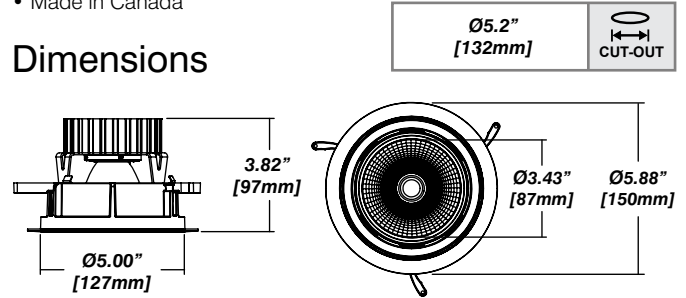

Reflector

Faceted Reflector

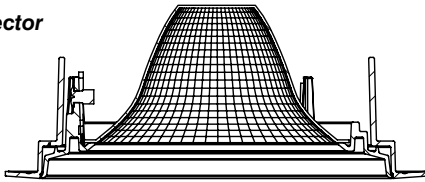


ARTEMIS 3 D Wet

WET RATED RECESSED FIXED LED DOWNLIGHT




Housing Options

New Construction - 915

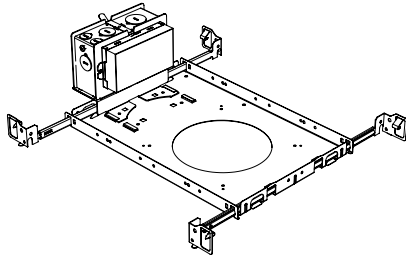


Dimension

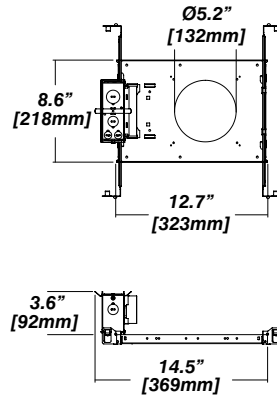


Included

- Plaster Frame** • Galvanized steel construction with cut-out
- Bar hanger** • Length: from 14-3/16" to 26"
- Outlet Box** • Outlet Box Included

IC Housing - 920

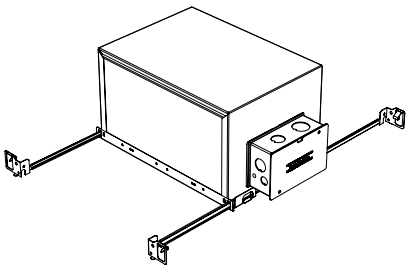

Dimension

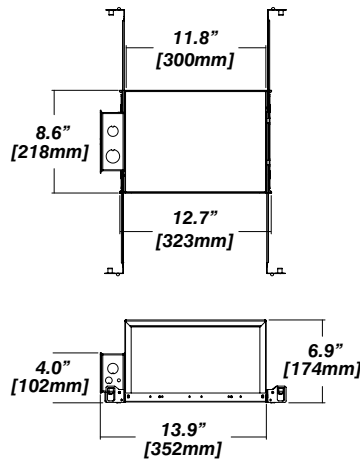

Included

- IC Housing** • Galvanized steel construction
- Airtight
- Includes gasketed junction box
- Plaster Frame** • Galvanized steel construction
- Bar hanger** • Length: from 14-3/16" to 26"

Note: use only with LED modules up to 1500lm