




Clareo Wall is an extruded aluminum linear illumination wall system available in sections up to 76" long (in high output). Available with two different frosted lens shapes. Easily wall mounted and secured with fasteners.

The customizable light engine make it ideal for many indoor applications. Dimmable electronic driver is provided which will fit inside of a 4" junction box. Class 2 listed for damp locations.


Fixture dimensions

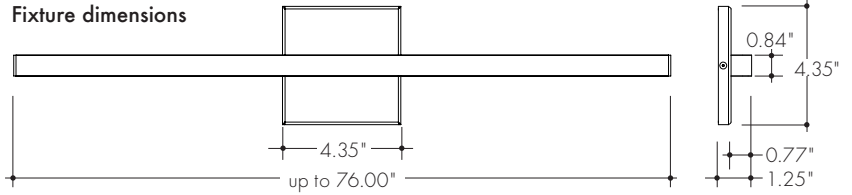

Model profiles



Clareo Square



Clareo Rounded Square

Finish options



Silver anodized



Black powder coated

Bronze powder coated



White powder coated

Technical data

OUTPUT OPTIONS

Output type	HO (LL36X2)	VHO (LL54X2)
Lumens at 3000K	332 Lum/ft	490 Lum/ft
Average power consumption at 4'	6.5 W/ft	10.4 W/ft
Operating Voltage	120V AC	120V AC

CCT/LUMEN MULTIPLIER


CCT	Multiplier	CRI
	(Multiple Light Output of 3000K)	
2700 K	0.81	98
2900 K	1.00	97
3000 K	1.14	91
3500 K	0.98	95
4100 K	1.06	93

Ordering code

MODEL	LENGTH	CCT	OUTPUT	LENS	FINISH
CLSW	24	27K	HO	F	SA
CLSW - Clareo Square wall CLQW - Clareo Rounded Square wall	24" - 76" 4" increments	27K - 2700 K 29K - 2900 K 30K - 3000 K 35K - 3500 K 41K - 4100 K	HO - High output VHO - Very High output	F - Frosted	SA - Silver BK - Black BZ - Bronze WH - White

(BK,BZ,WH finishes will have an upcharge and require longer lead times)

Photometry

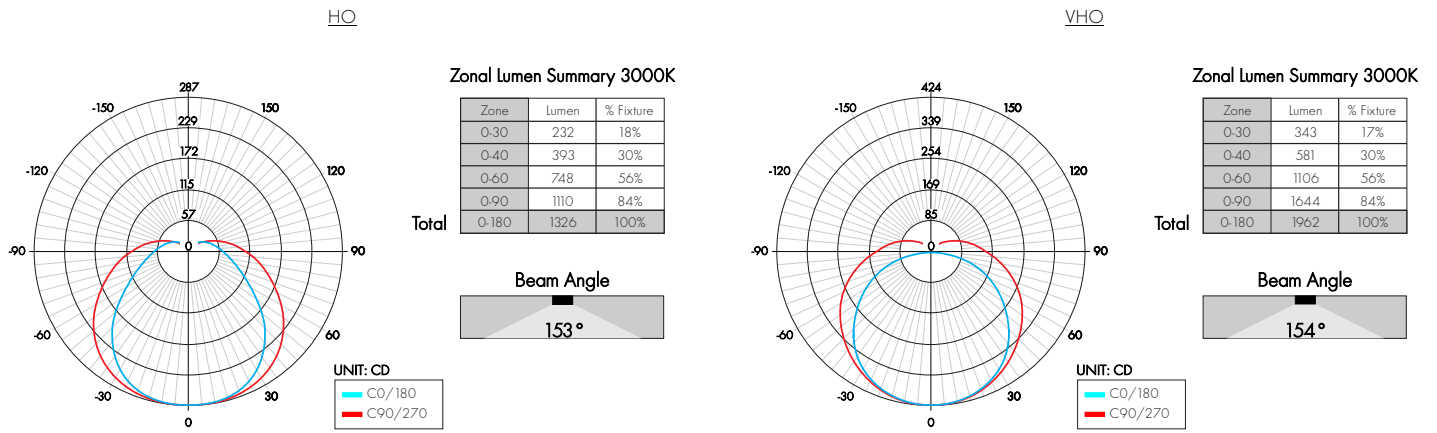

Power consumption per fixture length

Based on operation with PSD series of power supplies



Nominal Length	Actual Length	HO		VHO		
		W/ft	Total wattage	Actual Length	W/ft	Total wattage
24"	24-8/16"	6.75	13.50	24-8/16"	10.60	19.80
28"	28-7/16"	6.75	15.80	28-7/16"	10.57	23.50
32"	32-6/16"	6.75	17.90	32-6/16"	10.53	27.20
36"	36-6/16"	6.65	19.95	36-5/16"	10.50	30.90
40"	37-7/16"	6.65	22.00	40-4/16"	10.47	34.30
44"	44-3/16"	6.65	24.00	44-3/16"	10.43	37.70
48"	48-2/16"	6.55	26.20	48-2/16"	10.40	41.10
52"	52-2/16"	6.55	28.00			
56"	56-1/16"	6.55	30.00			
60"	60"	6.40	32.00			
64"	64-14/16"	6.40	34.00			
68"	68-10/16"	6.40	35.50			
72"	72-12/16"	6.30	37.80			
76"	76-11/16"	6.30	39.90			



Clareo Wall

Clareo Wall is an extruded aluminum linear illumination wall system available in sections up to 76" long (in high output). Available with two different frosted lens shapes. Easily wall mounted and secured with fasteners. The customizable light engine make it ideal for many indoor applications. Dimmable electronic driver is provided which will fit inside of a 4" junction box. Class 2 listed for damp locations.