

Features

The Class 2 DMX LED Driver is specifically designed to work with RGBW LineLED or modules and controls 96 watt using standard DMX512. Features eldoLED's LINEARdrive configurable dimmable DMX drivers. Intuitive user interface allows configuration of the number of channels, DMX settings for network mode and show, color and dim values for standalone operation. Suitable For Damp Location.



PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043



Technical information

Input voltage

120-277V AC, 1.1A, 50/60Hz

Output signal

24 VDC, 4.0 A, DMX512

Maximum wattage

96 watt circuits

Mounting

Surface mounted with conduit access

Dimming curve

Linear, Logarithmic (programmable)

100% - 0% (HydraDrive)

Ambient Operating Temperature


-20C to +35C

JA8 compliant

When used with models: LLDW36, LLDW52, or LLDW73STP


Weight

3.8 lbs

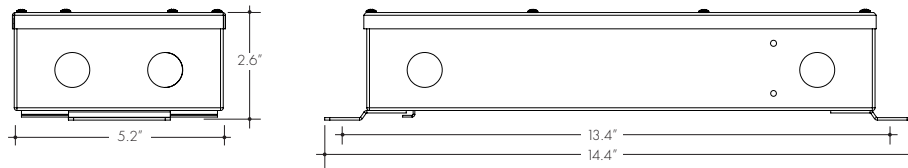

Wiring diagram

Note: All DMX products to be installed per DMX512 Standard.

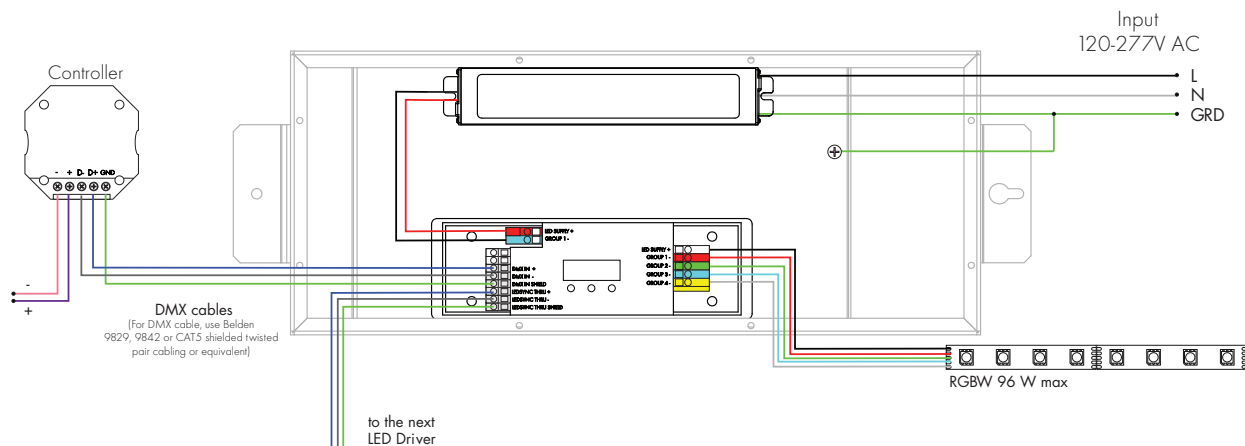

Ordering code

MODEL	POWER	OUTPUT
PSDMX	96	24
PSDMX - DMX LED Driver	96 - 96 Watt	24 - 24 VDC