


Features

The Class 2 DMX Power Supply is specifically designed to work with RGBW LineLED or modules and control 3 outputs rated at 96 watt each using standard DMX512. This power supply has a DMX512 load of 5 unit loads. Features eldoLED's LINEARdrive configurable dimmable DMX drivers. Intuitive user interface allows configuration of the number of channels, DMX settings for network mode and show, color and dim values for standalone operation. Suitable For Damp Location.



Technical information

Input voltage

120-277V AC, 3.3A, 50/60Hz

Output signal

24 VDC, 3 x 4.0 A, DMX512

Maximum wattage

3 x 96 watt circuits

Mounting

Surface mounted with conduit access

Dimming curve

Linear, Logarithmic (programmable)

100% - 0% (HydraDrive)

Ambient Operating Temperature


-20C to +35C

JA8 compliant

When used with models: LLDW36, LLDW52, or LLDW73STP


Weight

9.6 lbs

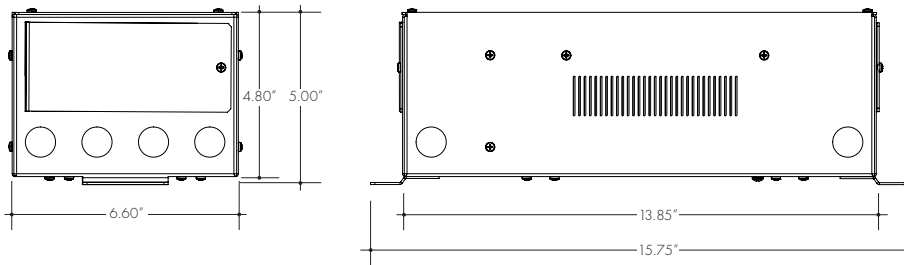

Wiring diagram

Note: All DMX products to be installed per DMX512 Standard

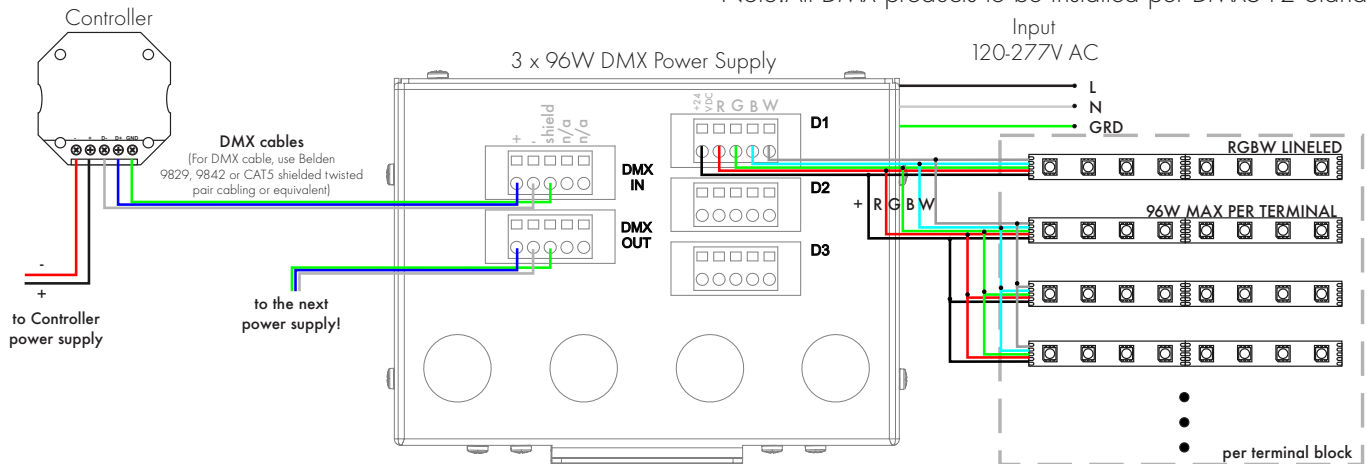

Ordering code

MODEL	POWER	OUTPUT
PSDMX	3X96	24
PSDMX - DMX LED Driver	3X96 - 96 Watt	24 - 24 VDC