

Features

The Class 2 DMX Power Supply is specifically designed to work with RGBW LineLED or modules and control 3 outputs rated at 96 watt each using standard DMX512. Features eldoLED's LINEARdrive configurable dimmable DMX drivers. Intuitive user interface allows configuration of the number of channels, DMX settings for network mode and show, color and dim values for standalone operation. Suitable For Damp Location.



PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043

Technical information

Input voltage

120-277V AC, 3.3A, 50/60Hz

Output signal

24 VDC, 3 x 4.0 A, DMX512

Maximum wattage

3 x 96 watt circuits

Mounting

Surface mounted with conduit access

Dimming curve

Linear, Logarithmic (programmable)

100% - 0% (HydraDrive)

Ambient Operating Temperature


-20C to +35C

JA8 compliant


When used with models: LLDW36, LLDW52, or LLDW73STP

Weight

9.6 lbs

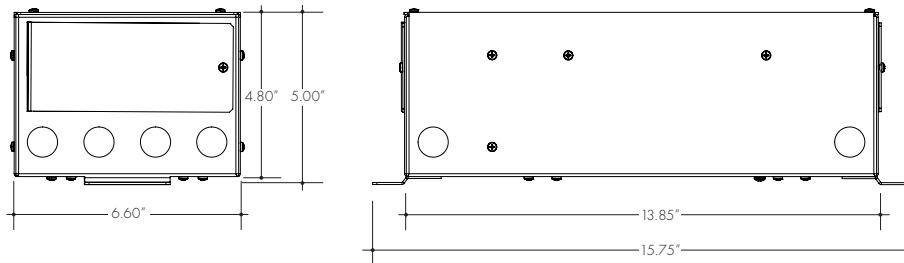

Wiring diagram

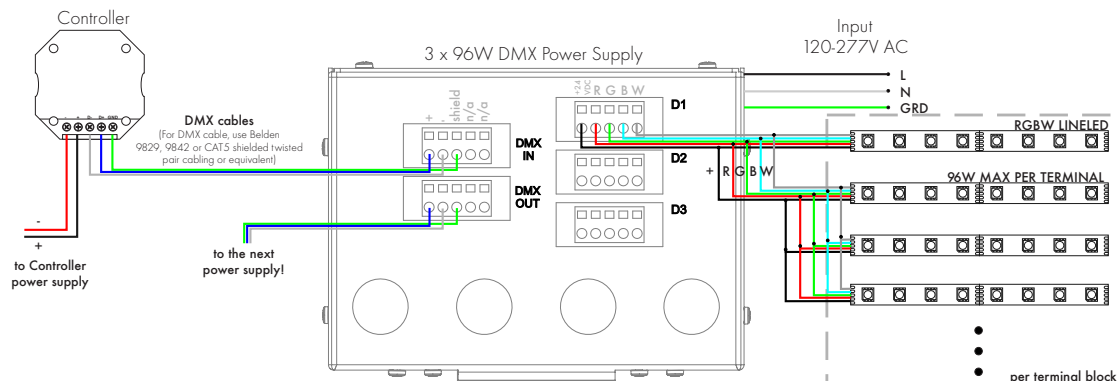

Ordering code

MODEL	POWER	OUTPUT
PSDMX	3X96	24
PSDMX - DMX LED Driver	3X96 - 96 Watt	24 - 24 VDC