

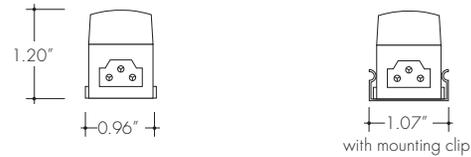


Extruded aluminum line voltage linear illumination system, Easy-link features specifically designed 120V AC LED engine that provides constant illumination levels from the beginning to the end of the runs. Easy-link is suitable for cove lighting, architectural accents, under or above cabinets and many other applications. Available in sections of 12", 24", 36" & 48" long with the option to extend up to 10 fixtures joined together.

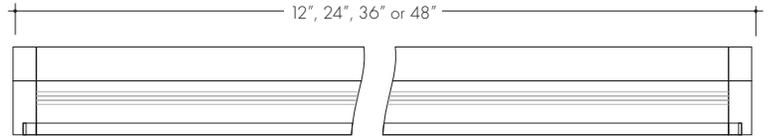

Finish options

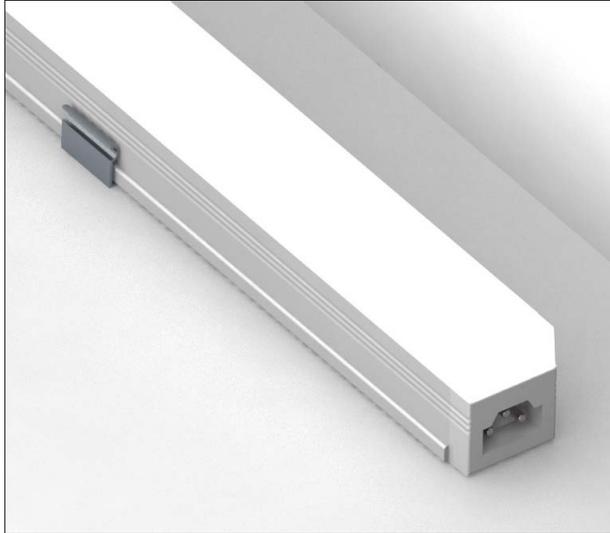

Technical information

Output Options
(3000K)

Lumens	318 lum/ft
CRI	90+
Operating Voltage	120 VAC

Power Consumption

Section Length	Wattage
12"	3.8 W
24"	8.3 W
36"	11.5 W
48"	15 W

CCT/Lumen multiplier

Color temperature	Multiplier (Multiple Light Output of 3000K HO)	CRI
2700 K	0.81	98
3000 K	1.00	91
3500 K	0.98	95

Ordering code

MODEL	VOLTAGE	LENGTH	CCT	DIMMING
EL	120V	12	27K	D
EL - Easy-Link 120V - 120VAC 12 - 11.5" 27K - 2700 K D - Dimming (Triac)				
*24 - 23.75" 30K - 3000 K				
*36 - 35.5" 35K - 3500 K				
*48 - 47.25"				

* Title 24 JA8 Compliant

Accessories (sold separately)

occupancy sensor/switch (splice box)
Part # EL-OSSB-WH

occupancy sensor/switch
 (used with power cord accessory)
Part # EL-OSSB-PC-WH



- Provides excellent detection of large motion (walking) when mounted between 15 to 40 ft.
- 15 to 20 ft radial coverage overlaps area lit by a typical high bay fixture.
- Recommended for fixtures that have a 1:1 spacing to mounting height ratio or less (e.g., fixtures 30' on center or less @ a 30' mounting height).

Features

- **Occupancy Time Delay**
- **Test Mode & 100 hr Burn-in**
- **Minimum On Time**
- **Lamp Information**


on/off switch (splice box)
Part # EL-SB-WH

on/off switch (used with power cord accessory)
Part # EL-SB-PC-WH

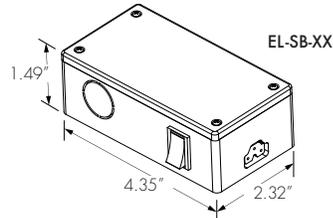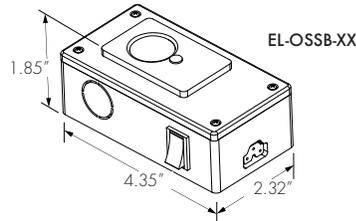


jumper cable

- Part # JC-6** (5.9" long)
- Part # JC-12** (11.8" long)
- Part # JC-24** (23.6" long)




power cord

Part # PC-72 (72" long)




joiner


1 provided per fixture



SIDE VIEW

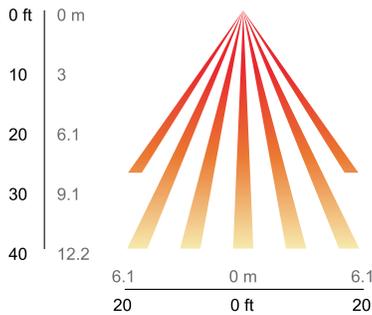

TOP VIEW

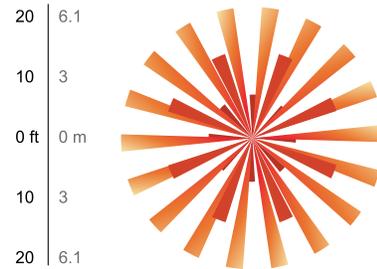

Energy Management
 Equipment Accessory

Sample Layout

