


# LETO 1

DOUBLE

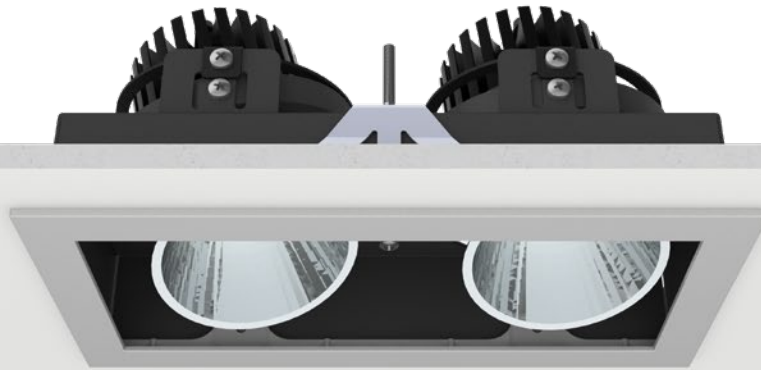

**Leto 1 Double - Recessed Adjustable downlight.** The LETO 1 Double is a 2 light version of the LETO 1 Single recessed LED fixture. Designed to be architecturally pleasing, it is fully adjustable to 30°. It can be used as a general light application, or to highlight specific design areas while maintaining consistency with LETO 1 Single and Triple.

## Ordering Code

Fixture	<b>671</b>					
	1	2	3	4	5	6
Driver		<b>671</b>			--	--
	1	2	3	4	5	6

## Product Specifications

SAMPLE: Fixture **671 - 90 - 610 - 27 - 07 - 01** | Driver **910 - 671 - STD - 120 - 90 - 07**

1 - Model	2 - LED	3 - Reflector	4 - CCT	5 - Lumen	6 - Finish	1 - Housing Style
<b>671</b> · Leto 1 Double	<b>90</b> · Designer <b>83V</b> · Vibrancy* <sup>2</sup> <b>98</b> · Artist 98+ <b>98V</b> · Vibrancy/Artist* <sup>2</sup> <b>98B</b> · Beauty* <sup>1</sup>	<b>618</b> · 18° <b>630</b> · 30° <b>645</b> · 45° <b>660</b> · 60°	<b>27</b> · 2700K <b>30</b> · 3000K <b>35</b> · 3500K <b>40</b> · 4000K	<b>07</b> · 700 (4.5W) <b>10</b> · 1000 (6.6W) <b>13</b> · 1300 (9.5W) <b>20</b> · 2000 (15.2W) <b>30</b> · 3000* <sup>3</sup> (25.7W)	<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <b>XX</b> · Custom	<b>910</b> · Remote <b>915</b> · New Construction

2 - Model	3 - Driver	Dim Level	Dim Level	4 - Line Voltage	5 - LED	6 - Lumen
<b>671</b> · Leto 1 Double	<b>STD</b> · Non Dimming <b>LCS</b> · 0 - 10 Volt Protocol <b>DIM</b> · Phase* <sup>4</sup> <b>ELDOLC</b> · EldoLED 0 - 10 Volt* <sup>5</sup> <b>DALI</b> · Dali Protocol* <sup>5</sup>	N/A 1% 1% 0.1% 0.1%	<b>LUTES</b> · Hilume Ecodigital* <sup>5</sup> <b>LUT2W</b> · 2 Wire for phase* <sup>5</sup> <b>LUT5S</b> · 5 Series Eco System* <sup>5</sup> <b>DMX</b> · SENSO* <sup>5</sup> <b>EMG</b> · Emergency Driver* <sup>5,6</sup>	1% 1% 5%	<b>120</b> · 120V <b>277</b> · 277V <b>347</b> · 347V* <sup>7</sup>	Same as Fixture Same as Fixture

\*1 Only available in 2700K  
\*2 Only available in 3000K  
\*3 Not available with Beauty Module  
\*4 120V only

\*5 Requires remote housing  
\*6 Specified separately  
\*7 Not available with ELDO, Lutron or DMX

Project : \_\_\_\_\_  
Quantity : \_\_\_\_\_  
Type : \_\_\_\_\_  
Notes : \_\_\_\_\_

## Xicato XTM Module

- Up to 125 lumens per Watt at operating conditions
- Very tight color consistency, within 1 x 2 MacAdam Ellipses
- Available in 19mm and 9mm LES
- 90 and 98+ CRI versions

### 98+ (Artist)


Xicato Artist Series is virtually indistinguishable from halogen light, and delivers high quality, natural light that is efficient and long lasting.



**CCT:** 2700 - 4000  
**CRI:** 98+

### Vibrancy


Xicato Vibrant Series enables us to see colors, hues and tones, that are real, but simply aren't visible under halogen light.



**CCT:** 3000  
**CRI:** 83+, 98+

### Designer

Xicato Designer Series is custom formulated to provide outstanding color rendering while retaining high efficacy.



**CCT:** 2700 - 4000  
**CRI:** 90

### Beauty

Xicato Beauty Series makes it possible to precisely tune the spectrum to deliver extraordinary clarity and fidelity for settings where people are the focus.




**CCT:** 2700  
**CRI:** 95

## Reflector


### Faceted Reflector

Senso metal spun reflectors for function, low glare and efficiency



## Dimensions

□ 9.25" x 4.75"  
[235mm x 120mm]

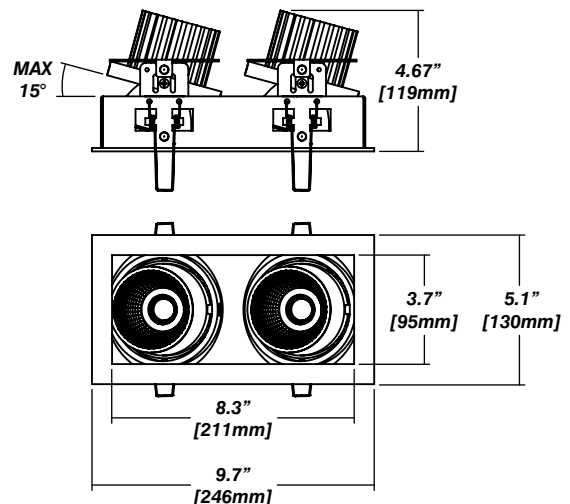

## Installation


- For new and retrofit installations
- Holds in place with two spring clips
- Fully 30° angle adjustable spot, 360° rotation
- Simple connection between fixture and driver via quick connect
- Available for wet rated in single version.

## Construction / Finish


- Custom finishes are available
- Cast Aluminum Trim and Steel Casing
- Rated for damp location
- Made in Canada

## Housing Options

### Standard Senso Housing - 910

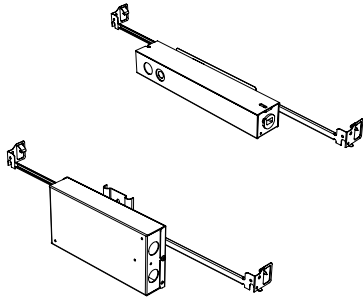

### Dimension

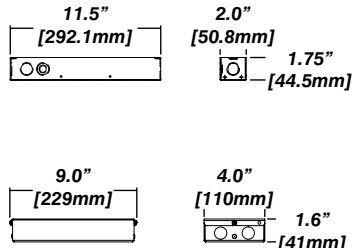

### Included


Unless specified otherwise, this is provided as standard

- Bar hanger** • Length: from 14-3/16" to 26"
- Driver with enclosure** • Galvanized steel enclosure
- Security wire** • Flexible aircraft cable, 12" long
- Easy to clip snap body included


\* driver can be installed either:

(A) laying on top of ceiling. (B) mounted to the bar hanger and fixed to the ceiling. (C) remote from the fixture, with the bar hanger still used if desired to secure the fixture. (D) Fixture may require multiple drivers depending on specification.

### New Construction - 915

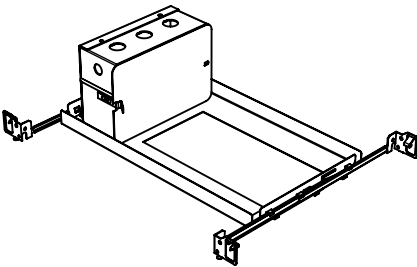

### Dimension

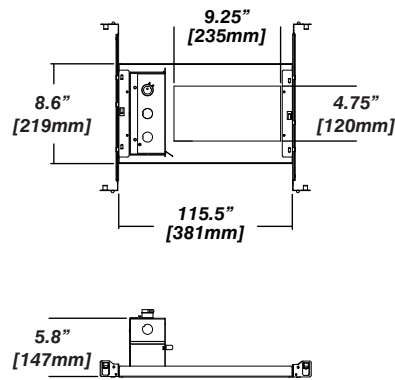

### Includes

- Plaster Frame** • Galvanized steel construction
- Bar hanger** • Length: from 14-3/16" to 26"
- Outlet Box** • 7/8" knock out
- Divider inside
- Cover included
- Thermal protector** • Designed for protection of fixtures in non-IC setup
- Causes fixture light to blink in fault condition
- Automatic resetting
- Security wire** • Flexible aircraft cable, 12" long
- Easy to clip snap body included

\*4 See page 1 for full dimming options