

LETO 11 S A

SURFACE MOUNT ASYMMETRIC LED DOWNLIGHT



Leto 11 S A - Asymmetric Surface Mount LED Light. LETO 11 S A is ideal when you need to draw attention to a wall mounted subject. It is best suited for use in Art Galleries, Museums, or to accentuate home decor.

Ordering Code

| | | | | | | | | |
|---------|-------------|---|----|----|---|---|---|---|
| Fixture | 696A | | -- | | | | | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| Driver | | | -- | -- | | | | |
| | 1 | 2 | 3 | 4 | | | | |

Product Specifications

SAMPLE: Fixture **696A - A90 - - - 27 - 07 - DL - 08 - 02** | Driver **STD - 120 - A90 - 07**

| 1 - Model | 2 - LED | 3 - Optic | 4 - CCT | 5 - Lumen | 6 - Accessory |
|--------------------------|-----------------------|--|--|---|----------------------------|
| 696A · Leto 11 SA | A90 · Accuracy | Leto 11 S A is equipped with a fixed beam spread. <i>For other optics please contact SENSO.</i> | 25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K | 07 · 700 (6.5W) 10 · 1000 (9.3W) 15 · 1500 (12.5W) | DL · Diffusing Lens |

| 7 - Body Color | | 8 - Baffle Color | | 1 - Driver | Dim Level | Dim Level |
|--------------------|-----------------------|--------------------|-----------------------|---|-----------|--|
| <i>Standard</i> | <i>Premium</i> | <i>Standard</i> | <i>Premium</i> | STD · Non Dimming | N/A | LUT2W · 2 Wire for phase ^{*1/2} 1% |
| 01 · White | 52 · Mocha | 01 · White | 52 · Mocha | LCS · 0 - 10 Volt Protocol | 1% | LUT5S · 5 Series Eco System ^{*2} 5% |
| 02 · Black | 53 · Charcoal | 02 · Black | 53 · Charcoal | DIM · Phase ^{*1} | 1% | DMX · SENSO ^{*2} |
| 08 · Silver | 54 · Cerulean | 08 · Silver | 54 · Cerulean | ELDOLC · EldoLED 0 - 10 Volt ^{*2} | 0.1% | EMG · Emergency Driver ^{*2/3} |
| | 55 · Firebrick | | 55 · Firebrick | DALI · Dali Protocol ^{*2} | 0.1% | CSMB · Casambi Wireless Control ^{*2/3} |
| | XX · RAL | | XX · RAL | LUTES · Hilume Ecodigital ^{*2} | 1% | |

| 2 - Voltage | 3 - LED | 4 - Lumen | |
|---|-----------------|-----------------|---|
| 120 · 120V 277 · 277V 347 · 347V ^{*2/4} | Same as Fixture | Same as Fixture | *1 120V only *2 remote mount *3 second driver required *4 not available with ELDO, Lutron or DMX |

Project : _____
 Quantity : _____
 Type : _____
 Notes : _____

LETO 11 S A

SURFACE MOUNT ASYMMETRIC LED DOWNLIGHT



Reflector

Senso metal spun faceted reflectors are specifically designed to retain as much light as possible. This results in a more power efficient fixture with a higher delivered lumen.




Installation

- Mounting plate included
- Easy, single motion installation method

Construction / Finish

- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Aluminum extruded Body
- Made in Canada

Dimensions

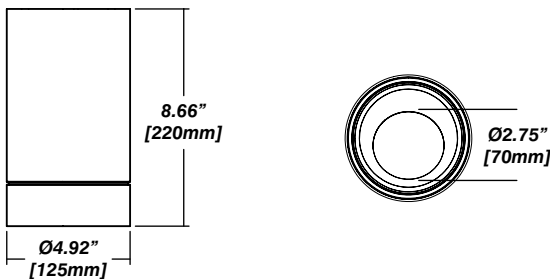

Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See Sensolighting.com for more information.

**Full photometric Reports and IES files available for every configuration*

Color Metrics

TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

**Full Color Metric Info Available at Sensolighting.com*

LED Module Performance

- Output:** Up to 150 lumen/Watt
- Efficacy:** Color consistency within a 3-MacAdam Ellipse
- CCT:** 2500K - 6500K
- Color Rendering:** 90+ CRI
- Min. R Values:** R⁹ - 60 R¹ - 90 R^a - 100

Driver and Power Consumption

- Dimming:** 1% dimming standard with 0.1% option
Casambi wireless control available
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9
Efficiency over 85%
Class 2 output for safety
- Installation:** Remote mounted

| Lumen Option | 700lm | 1000lm | 1500lm | 2000lm |
|-----------------|-------|--------|--------|--------|
| Fixture Wattage | 6.5W | 9.3W | 12.5W | 20.2W |
| Delivered Lumen | 656lm | 1035lm | 1347lm | 1917lm |

LETO 11 S A

SURFACE MOUNT ASYMMETRIC LED DOWNLIGHT

