


# LETO 2 (wet rated)

LETO LED PURE | EFFICIENT | PERENNIAL

RECESSED LIGHT

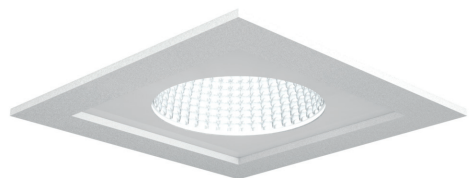

## wet-rated recessed LED down light

### SPECIFICATIONS

LETO 2 wet rated

#### GENERAL

- recessed down light with acrylic trim detail

#### LED

- industry's best colour consistency
- 1x2 MacAdam ellipses
- LED lifetime of 50,000h
- infrared and UV free beam
- different CRI, colour T° and lumen output available, please refer to the chart

#### REFLECTOR

- Senso metal spun reflectors are designed for function, low glare and efficiency

#### ELECTRICAL

- standard 120 V driver included, options available:
  - standard dimming driver (using ELV dimmers)
  - 0-10 V dimmable driver (down to ~1%)
  - ELDO driver (0-10V dimming, down to ~0.1%)
  - 277V and 347 V option (see next page)

#### FINISH

- satin powder coat finish

#### CONSTRUCTION

- die cast aluminium outside trim, acrylic inside trim
- steel casing

#### INSTALLATION

- designed for retrofit and new installations
- holds in place by two spring clips
- ceiling thickness: 0-22 mm [0-0.87"]
- simple connection between driver and fixture via connectors

#### SECURITY / PROTECTION

- thermal protector
- seismic tether

#### OPTIONS / ACCESSORIES

- BODINE emergency driver:
  - reserve of minimum 90 min. at reduced lume





#### HOUSING OPTIONS

- please see separate spec sheet for more information

#### WEIGHT

0.6 kg [1.44 lbs]

#### DIMENSION

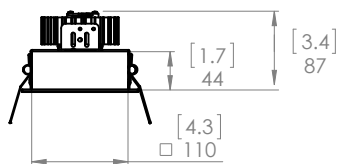

4-3/4" x 4-3/4"  
(120 mm x 120mm)



Consult this chart to confirm the availability of the desired combination before specifying below.

Colour Rendering Index (CRI)	STD/V CRI 83+					ARTISTV/B CRI 98+			
	700	1000	1300	2000	3000	700	1000	1300	2000
Luminous Flux (lm)	700	1000	1300	2000	3000	700	1000	1300	2000
Consumption (W)	6.5	9.5	14	23	35	9	13	19	32
Colour T°									
2700 K	●	●	●	●	●	●▲	●▲	●▲	●▲
3000 K	●○	●○	●○	●○	●○	●*	●*	●*	●*
3500 K	●	●	●	●	●	●	●	●	●
4000 K	●	●	●	●	●	●	●	●	●
ELV dimming DIM	●	●	●	●	●	●	●	●	●
LUTRON/LCS/ELDO	●	●	●	●	●	●	●	●	●
STD	●	●	●	●	●	●	●	●	●

● = available ▲ = XTM Beauty ○ = Vibrant 83+ \* = Vibrant Artist 98+

#### Please specify:

- MODEL  **674** – leto 2 wet rated
- COLOUR RENDERING INDEX  **581** – 83+  
 **781** – 98+  
 **781B** – beauty (2700K only)  
 **881** – vibrant (3000K only)  
 **981** – vibrant/artist (3000K only)
- REFLECTOR  **610** – 18°  
 **611** – 30°  
 **612** – 45°  
 **613** – 60°
- COLOUR TEMPERATURE  **27/90\*** – 2700K  
 **30/70\*** – 3000K  
 **35/60\*** – 3500K  
 **40** – 4000K  
 \* old part number
- FINISH  **01** – white  
 **02** – black  
 **08** – silver  
 **XX** – custom
- LUMEN  **07** – 700  
 **10** – 1000  
 **13** – 1300  
 **20** – 2000  
 **30** – 3000 (83+only)
- DRIVER  **STD** – non-dimmable  
 **DIM** – dimmable  
 **LCS** – 0-10V control  
 **ELDO-LCS** – 0-10V control  
 **ELDO-DALI** – addressable  
 **LUT** – based on submittal drawing

QUANTITY	PROJECT
NOTE	



# HOUSING OPTIONS


## SPECIFICATIONS

Specify your LETO fixture, then select:


STYLE  **910** – standard senso housing  
 **915** – new construction  
 **920** – IC housing

LINE VOLTAGE  **120** – 120  
 **277** – 277  
 **347** – 347

### Standard Senso housing 910

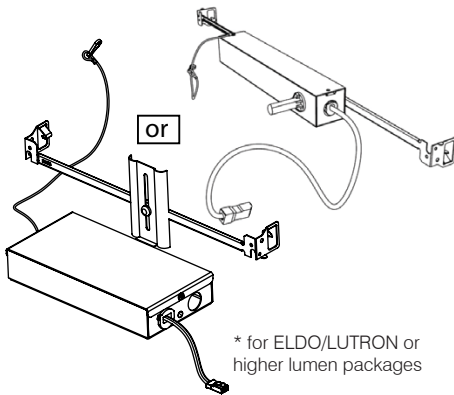

#### DIMENSION

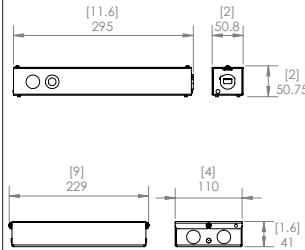

Unless specified otherwise, this is provided as standard.

includes:

**Bar hanger (1)**

- length: from 14-3/16" to 26"

**Thermal protector**

- designed for protection of fixtures in non-IC setup
- causes fixture light to blink in fault condition
- automatic resetting

**Driver with enclosure**

- galvanized steel enclosure

**Connector to fixture**

- lead wire with plug to fixture



**Security wire**

- flexible aircraft cable, 12" long
- easy to clip snap body included

\* driver can be installed either:

(A) laying on top of ceiling, (B) mounted to the bar hanger and fixed to the ceiling, or (C) remote from the fixture, with the bar hanger still used if desired to secure the fixture

### New construction 915

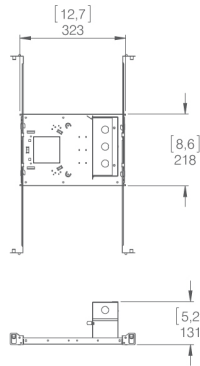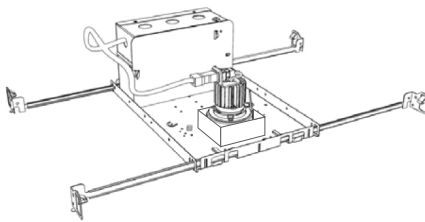

includes:

**Plaster frame**

- galvanized steel construction with cut-out to accommodate fixture.

**Bar hangers**

- length: from 14-3/16" to 26"

**Outlet box**

- 7/8" knock out
- divider inside
- cover included

**Thermal protector**

- designed for protection of fixtures in non-IC setup
- causes fixture light to blink in fault condition
- automatic resetting

**Driver with enclosure**

- galvanized steel enclosure



**Connector to fixture**

- lead wire with plug to fixture

**Security wire**

- flexible aircraft cable, 12" long
- easy to clip snap body included

### IC housing 920

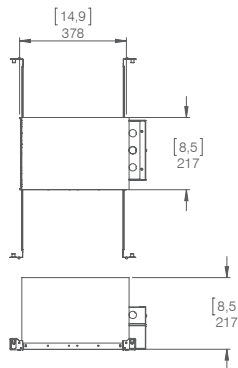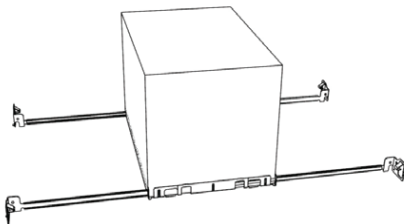

includes:

**IC housing**

- galvanized steel construction
- airtight
- includes gasketed junction box

**Plaster frame**

- galvanized steel construction

**Bar hangers**

- length: from 14-3/16" to 26"

**Driver with enclosure**

- galvanized steel enclosure

**Connector to fixture**

- lead wire with plug to fixture

NOTE: use only with LED modules up to 1300lm.