


# LETO 22

TRIMLESS RECESSED LED DOWNLIGHT

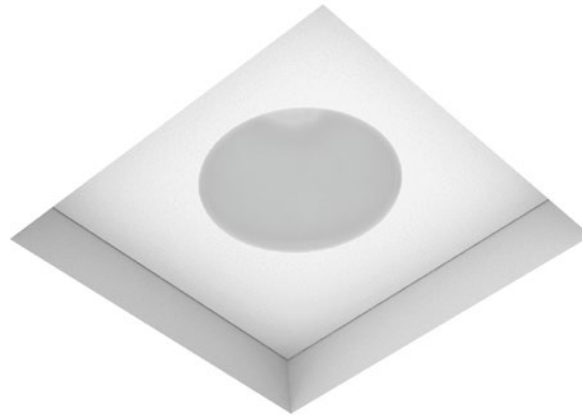

**Leto 22 - Recessed downlight.** LETO 22 is a square trimless recessed LED fixture with a small round aperture that permits refined glare control and precision light distribution.

## Ordering Code

Fixture	<b>603</b>						
	1	2	3	4	5	6	
Driver		<b>603</b>			--	--	--
	1	2	3	4	5	6	7

## Product Specifications

SAMPLE: Fixture **603 - A90 - 618 - 27 - 07 - 01** | Driver **915 - 603 - STD - 120 - A90 - 07 - 01**

1 - Model	2 - LED	3 - Optic	4 - CCT	5 - Lumen	6 - Finish	1 - Housing Style	2 - Model
<b>603</b> · Leto 22	<b>A90</b> · 93+ CRI Accuracy	<b>618</b> · 18° <b>630</b> · 30° <b>645</b> · 45° <b>660</b> · 60°	<b>27</b> · 2700K <b>30</b> · 3000K <b>35</b> · 3500K <b>40</b> · 4000K	<b>07</b> · 700 (8.2W) <b>10</b> · 1000 (11.2W) <b>15</b> · 1500 (18.2W) <b>20</b> · 2000 (24.9W) <b>30</b> · 3000 (34.6W)	<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <b>XX</b> · Custom	<b>915</b> · New Construction	<b>603</b> · Leto 22

3 - Driver	Dim Level		Dim Level	4 - Line Voltage	5 - LED	6 - Lumen	7 - Finish
<b>STD</b> · Non Dimming	N/A	<b>LUTES</b> · Hilume Ecodigital <sup>12</sup>	1%	<b>120</b> · 120V	Same as Fixture	Same as Fixture	Same as Fixture
<b>LCS</b> · 0 - 10 Volt Protocol	1%	<b>LUT2W</b> · 2 Wire for phase <sup>1/2</sup>	1%	<b>277</b> · 277V			
<b>DIM</b> · Phase <sup>*1</sup>	10%	<b>DMX</b> · SENSO <sup>*2</sup>		<b>347</b> · 347V <sup>*4</sup>			
<b>ELDOLC</b> · EldoLED 0 - 10 Volt <sup>*2</sup>	0.1%	<b>EMG</b> · Emergency Driver <sup>*2/3</sup>					
<b>DALI</b> · Dali Protocol <sup>*2</sup>	0.1%	<b>CSMB</b> · Casambi Wireless Control <sup>12/3</sup>					

\*1 120V only  
\*2 Requires remote housing  
\*3 Specified separately  
\*4 Not available with ELDO, Lutron or DMX

Project : \_\_\_\_\_  
Quantity : \_\_\_\_\_  
Type : \_\_\_\_\_  
Notes : \_\_\_\_\_  
\_\_\_\_\_

# LETO 22

TRIMLESS RECESSED LED DOWNLIGHT

## Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See [Sensolighting.com](http://Sensolighting.com) for more information.

*\*Full photometric Reports and IES files available for every configuration*

## Color Metrics

### TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

*\*Full Color Metric Info Available at [Sensolighting.com](http://Sensolighting.com)*

## Light Engine

**Output:** up to 3000lm

**High Efficacy:** up to 85 lumen/Watt

**Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K or 6500K

**Color Consistency:** Range within a 3-MacAdam Ellipse

**Color rendering (CRI):** 93+ CRI & 50+ R9 Value

## Driver and Power Consumption

**Dimming:** 1% dimming standard with 0.1% option

**Ripple:** Industry leading Low ripple

**Efficiency:** Power Factor >0.9

Efficiency over 85%

Class 2 output for safety

Lumen Option	700lm	1000lm	1500lm	2000lm	3000lm
Fixture Wattage	8.2W	11.2W	18.2W	24.9W	34.6W
Delivered Lumen	698lm	923lm	1433lm	1808lm	2708lm


## Installation

- For new installations only
- Simple connection between fixture and driver via quick connect

## Construction / Finish

- Custom finishes are available
- Cast Aluminum Trim and Steel Casing
- Made in Canada


## Dimensions

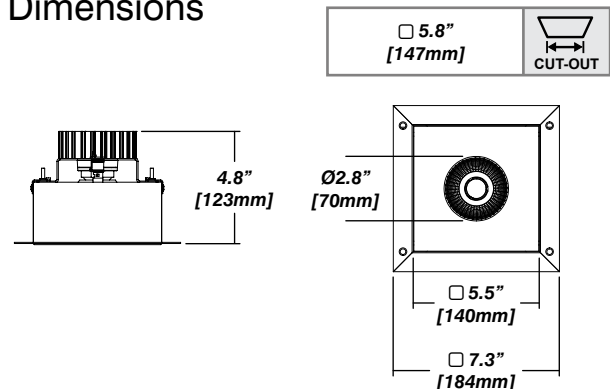

## Reflector

### Faceted Reflector


Senso metal spun reflectors for function, low glare and efficiency




# LETO 22

TRIMLESS RECESSED LED DOWNLIGHT  
Housing Options

## New Construction - 915



## Dimension

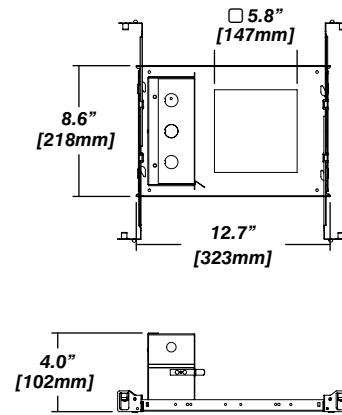

## Included

- Plaster Frame** • Galvanized steel construction with cut-out to
- Bar hanger** • Length: from 14-3/16" to 26"
- Security wire** • Flexible aircraft cable, 12" long
- Easy to clip snap body included