


# LETO 44 Mini MP

SURFACE LED SPOTLIGHT

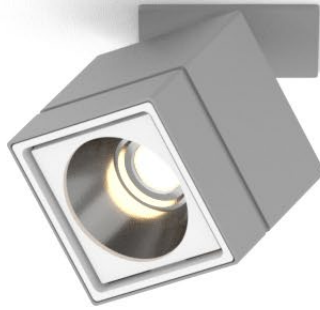

**Leto 44 Mini MP - Surface Mount Spotlight.** Leto 44 Mini MP offers an articulating, short-stem spotlight combined with a versatile and efficient LED. Excels in display based spaces like galleries, industrial and retail.

## Ordering Code

Fixture	<b>626</b>								
	1	2	3	4	5	6	7		
Driver								--	--
	1	2	3	4	5	6	7	8	9

## Product Specifications

**SAMPLE:** Fixture **626 - A90 - 717 - 27 - 07 - 08 - 01** | Driver **955 - 08 - 03 - 01 - 06 - STD - 120 - A90 - 07**

1 - Model	2 - LED	3 - Optic	4 - CCT	5 - Lumen	6 - Body Color	7 - Baffle Color		
<b>626</b> · Leto 44 Mini Monopoint	<b>A90</b> · Accuracy	<b>717</b> · 17° <b>724</b> · 24° <b>760</b> · 60°	<b>25</b> · 2500K <b>27</b> · 2700K <b>30</b> · 3000K <b>35</b> · 3500K <b>40</b> · 4000K <b>65</b> · 6500K	<b>07</b> · 700 (6W) <b>10</b> · 1000 (9W)	<i>Standard</i> <b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <i>Premium</i> <b>52</b> · Mocha <b>53</b> · Charcoal <b>54</b> · Cerulean <b>55</b> · Firebrick <b>XX</b> · RAL	<i>Standard</i> <b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <i>Premium</i> <b>52</b> · Mocha <b>53</b> · Charcoal <b>54</b> · Cerulean <b>55</b> · Firebrick <b>XX</b> · RAL		
1 - Canopy Style	2 - Canopy Color	3 - Suspension Type	4 - Stem Color	5 - Stem Height				
<b>955</b> · Round Slim* <b>965</b> · Square Slim* <b>955F</b> · Round Flangeless** <b>954</b> · Round Semi-Recessed	<i>Standard</i> <b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <i>Premium</i> <b>52</b> · Mocha <b>53</b> · Charcoal <b>54</b> · Cerulean <b>55</b> · Firebrick <b>XX</b> · RAL	<b>03</b> · Solid Stem	<i>Standard</i> <b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <i>Premium</i> <b>52</b> · Mocha <b>53</b> · Charcoal <b>54</b> · Cerulean <b>55</b> · Firebrick <b>XX</b> · RAL	<b>01</b> · 1" <b>06</b> · 6" <b>12</b> · 12" <b>24</b> · 24" <b>XX</b> · Custom (in inches)				
6 - Driver	Dim Level	Dim Level	7 - Voltage	8 - LED	9 - Lumen			
<b>STD</b> · Non Dimming <b>LCS</b> · 0 - 10 Volt Protocol <b>DIM</b> · Phase* <b>ELDOLC</b> · EldoLED 0 - 10 Volt	N/A 1% 1% 0.1%	<b>DALI</b> · Dali Protocol <b>LUTES</b> · HiLume Ecodigital** <b>LUT2W</b> · 2 Wire for phase**/2 <b>LUT5S</b> · 5 Series Eco System**	0.1% 1% 1% 5%	<b>120</b> · 120V <b>277</b> · 277V <b>347</b> · 347V**/3	Same as Fixture	Same as Fixture		

\*1 120V only  
\*\*2 remote mount  
\*\*3 not available with DALI or Lutron drivers

# LETO 44 Mini MP

SURFACE LED SPOTLIGHT



## Light Engine

- Output:** up to 1000lm
- High Efficacy:** up to 150 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K,
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 90 CRI & 50+ R9 Value

## Driver

- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9  
Efficiency over 85%  
Class 2 output for safety


## Installation

- 330° of rotation and 80° of tilt
- Preset stem height between 1" and 24" OR custom heights available

## Construction


- Machined aluminum construction
- Scratch resistant, satin powder coat finish
- Made in Canada

## Dimensions

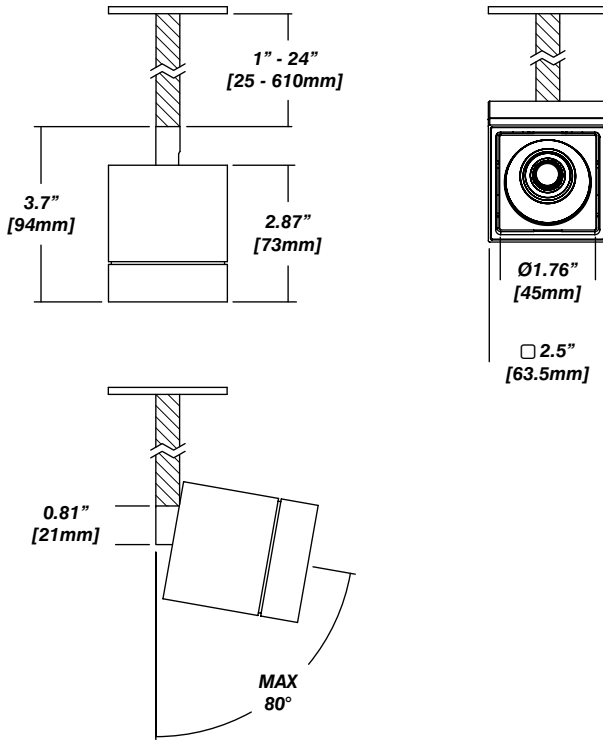


## Canopy


### 955 - Round Slim

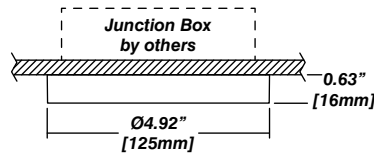



### 965 - Square Slim

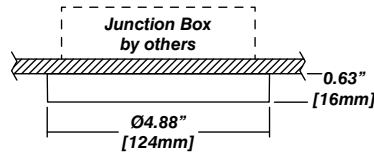

### 955F - Round Flangeless

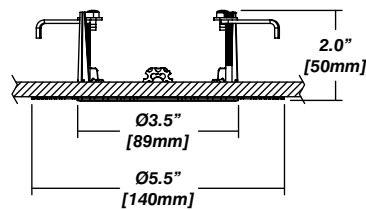

### 954 - Semi-Recessed + Cylinder Driver Housing

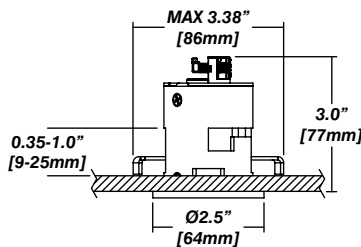

# LETO 44 Mini MP


SURFACE LED SPOTLIGHT





## Senso Driver Housings

### 910 - Single Remote Driver Housing

- Fits Standard, LCS or DIM drivers
- Galvanized steel enclosure
- Installed in remote location






## Dimensions





### 910 - Double Remote Driver Housing

- Fits all drivers
- Galvanized steel enclosure
- Installed in remote location



### 954 - Cylinder Driver Housing


- Supplied standard with every semi-recessed canopy
- Fits Standard, LCS or DIM drivers
- Extruded aluminum enclosure with strain relief to fixture
- Installed in ceiling beside canopy



## 954 Driver Layouts

### 954 with Cylinder Driver Housing


- Installed in ceiling beside canopy
- Driver mounted inside cylinder
- Dimming control wired from Cylinder Driver Housing



### 954 with Cylinder Driver Housing

#### + 910 Single Driver Housing

- Driver remotely mounted inside 910 housing
- Fed to 910 housing
- WAGO connector for DC side
- Thermal protector for high temperatures

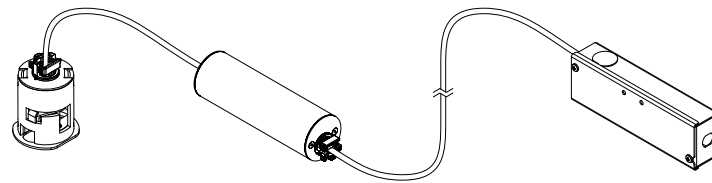

### 954 with Cylinder Driver Housing

#### + 910 Double Driver Housing

- Driver remotely mounted inside 910 housing
- Fed to 910 housing
- WAGO connector for DC side
- Thermal protector for high temperatures

