


LETO 44 Mini P

PENDANT LED DOWNLIGHT

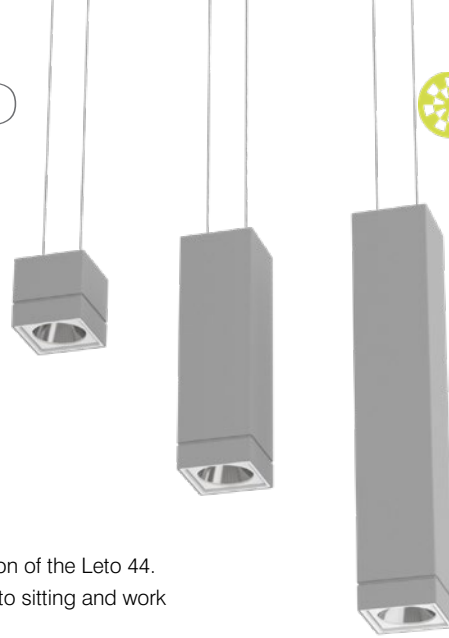

Leto 44 Mini - Pendant LED Light. Leto 44 Mini is a slimmed down version of the Leto 44. This small, medium and large pendant is slim and offers sleek minimalism to sitting and work areas with an efficient and powerful LED module.

Ordering Code

Fixture	731								
	1	2	3	4	5	6	7	8	9
Driver							--	--	
	1	2	3	4	5	6	7	8	

Product Specifications

SAMPLE: Fixture **731 - S - A90 - 617 - 27 - 07 - 00 - 08 - 02** | Driver **954 - 08 - 05 - 00 - STD - 120 - A90 - 07**

1 - Model	2 - Size	3 - CRI/LED	4 - Optic	5 - CCT	6 - Lumen	7 - Accessory		
731 · Leto 44 Mini Pendant	S · Small (73mm) M · Medium (209mm) L · Large (346mm)	A90 · Accuracy	617 · 17° 624 · 24° 660 · 60°	25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K	07 · 700 (6W) 10 · 1000 (9W) 15 · 1500 (14W) ^{**}	00 · No Accessory DL · Diffusing Foil HO · Honeycomb ^{**}		
8 - Body Color	9 - Baffle Color	1 - Canopy Style		2 - Canopy Color		3 - Suspension Type		
<i>Standard</i> 01 · White 02 · Black 08 · Silver	<i>Premium</i> 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL	<i>Standard</i> 01 · White 02 · Black 08 · Silver	<i>Premium</i> 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL	955 · Round Slim 965 · Square Slim 955F · Round Flangeless ^{**} 954 · Round Semi-Recessed	<i>Standard</i> 01 · White 02 · Black 08 · Silver	<i>Premium</i> 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL	03 · Solid Stem (6' MAX) 05 · 2 Powered Aircraft ^{**3} (6' incl.) <i>Contact SENSO for custom lengths</i>	
4 - Suspension Color	5 - Driver	Dim Level		Dim Level		6 - Voltage	7 - CRI/LED	8 - Lumen
00 · None ^{**3} 01 · White 02 · Black 03 · Clear XX · Custom	STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase ^{**4} ELDOLC · EldoLED 0 - 10 Volt ^{**5} DALI · Dali Protocol ^{**5}	N/A 1% 1% 0.1% 0.1%	LUTES · Hilume Ecodigital ^{**5} LUT2W · 2 Wire for phase ^{**4/5} LUT5S · 5 Series Eco System ^{**5} CSMB · Casambi Wireless Control ^{**6}	1% 1% 5%	120 · 120V 277 · 277V 347 · 347V ^{**7}	Same as Fixture	Same as Fixture	

*1 not available with small size

*2 always remote mount driver

*3 no feed cable color option for **05** - 2 Powered Aircraft

*4 120V only

*5 remote mount

*6 second driver required

*7 not available with DALI or Lutron drivers

LETO 44 Mini P

PENDANT LED DOWNLIGHT



Light Engine

- Output:** up to 1500lm
- High Efficacy:** up to 150 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K, 6500K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 90 CRI & 50+ R9 Value

Driver

- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9
Efficiency over 85%
Class 2 output for safety

Installation


- Height adjustable feed cable, powered aircraft cable or solid stem included
- Pre-assembled for quick installation

Construction


- Machined aluminum construction
- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Made in Canada

Dimensions



L - Large

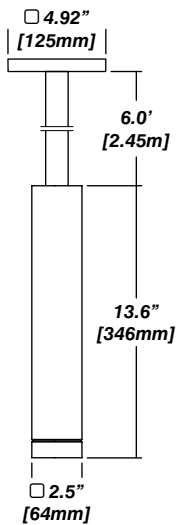

M - Medium

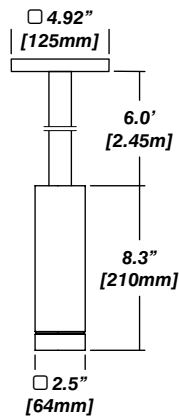


S - Small

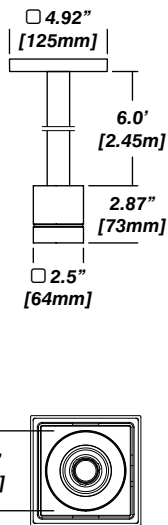


Canopy


955 - Round Slim

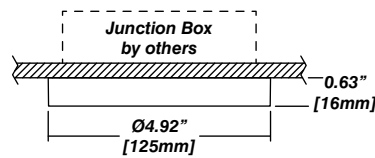



965 - Square Slim

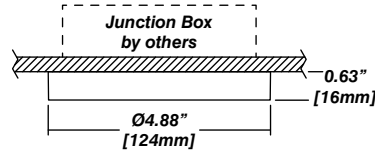

955F - Round Flangeless

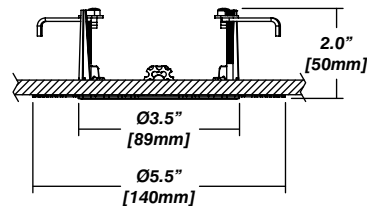

954 - Semi-Recessed + Cylinder Driver Housing

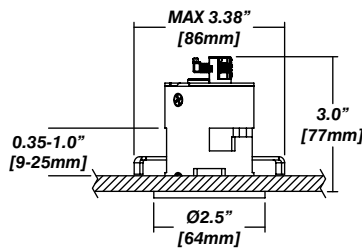

Accessories

Frosted Lens



Honeycomb




LETO 44 Mini P

PENDANT LED DOWNLIGHT



Senso Driver Housings

910 - Single Remote Driver Housing

- Fits Standard, LCS or DIM drivers
- Galvanized steel enclosure
- Installed in remote location






Dimensions





910 - Double Remote Driver Housing

- Fits all drivers
- Galvanized steel enclosure
- Installed in remote location



954 - Cylinder Driver Housing


- Supplied standard with every semi-recessed canopy
- Fits Standard, LCS or DIM drivers
- Extruded aluminum enclosure with strain relief to fixture
- Installed in ceiling beside canopy



954 Driver Layouts

954 with Cylinder Driver Housing


- Installed in ceiling beside canopy
- Driver mounted inside cylinder
- Dimming control wired from Cylinder Driver Housing



954 with Cylinder Driver Housing

+ 910 Single Driver Housing

- Driver remotely mounted inside 910 housing
- Fed to 910 housing
- WAGO connector for DC side
- Thermal protector for high temperatures

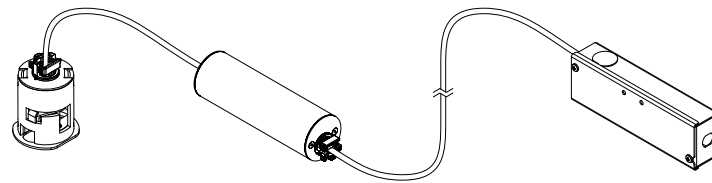

954 with Cylinder Driver Housing

+ 910 Double Driver Housing

- Driver remotely mounted inside 910 housing
- Fed to 910 housing
- WAGO connector for DC side
- Thermal protector for high temperatures

