

LETO 44 PLUS WM A SML

WALL MOUNT ASYMMETRIC LED DOWNLIGHT



Leto 44 Plus WM A SML - Wall Mount LED Light. Leto 44 Plus WM A SML is a wall mounted square LED fixture that casts light away from the wall filling your space with more functional indirect light.

Ordering Code

| | | | | | | | | |
|---------|-------------|---|----|----|---|---|---|---|
| Fixture | 713A | | | | | | | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| Driver | | | -- | -- | | | | |
| | 1 | 2 | 3 | 4 | | | | |

Product Specifications

SAMPLE: Fixture **713A - 90 - - - 27 - 07 - DL - 08 - 02** | Driver **LCS - 120 - 90 - 07**

| 1 - Model | 2 - LED | 3 - Optic | 4 - CCT | 5 - Lumen | 6 - Accessory |
|--|-------------------------------|--|--|---|----------------------------|
| 713A · Leto 44 Plus Small Asymmetric Wall Mount | A90 · 93+ CRI Accuracy | <i>Leto 44 Plus A is equipped with a fixed beam spread. For other optics please contact Senso.</i> | 25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K | 07 · 700 (6.1W) 10 · 1000 (9.1W) 15 · 1500 (14W) 20 · 2000 (25W) | DL · Diffusing Lens |

| 7 - Body Color | | 8 - Baffle Color | | 1 - Driver | Dim Level | Dim Level |
|--------------------|-----------------------|--------------------|-----------------------|-------------------------------------|-----------|--|
| <i>Standard</i> | <i>Premium</i> | <i>Standard</i> | <i>Premium</i> | STD · Non Dimming | N/A | LUTES · Hilume Ecodigital 1% |
| 01 · White | 52 · Mocha | 01 · White | 52 · Mocha | LCS · 0 - 10 Volt Protocol | 1% | LUT2W · 2 Wire for phase* ¹ 1% |
| 02 · Black | 53 · Charcoal | 02 · Black | 53 · Charcoal | DIM · Phase* ¹ | 1% | DMX · Senso |
| 08 · Silver | 54 · Cerulean | 08 · Silver | 54 · Cerulean | ELDOLC · EldoLED 0 - 10 Volt | 0.1% | EMG · Emergency Driver* ^{2,3} |
| | 55 · Firebrick | | 55 · Firebrick | DALI · Dali Protocol | 0.1% | CSMB · Casambi Wireless Control* ^{2,3} |
| | XX · RAL | | XX · RAL | | | |

| 2 - Voltage | 3 - LED | 4 - Lumen | |
|---|-----------------|-----------------|---|
| 120 · 120V 277 · 277V 347 · 347V* ^{2,4} | Same as Fixture | Same as Fixture | *1 120V only *2 remote mount *3 second driver required *4 not available with ELDO, Lutron or DMX |


Project : _____
 Quantity : _____
 Type : _____
 Notes : _____

LETO 44 PLUS WM A SML

WALL MOUNT ASYMMETRIC LED DOWNLIGHT


Reflector

Faceted Reflector

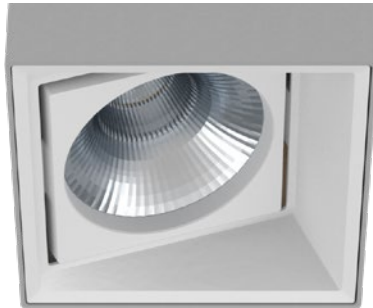

Accessories

Diffusing Lens




Installation

- Mounting plate included
- Easy, single motion installation method

Construction / Finish

- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Aluminum extruded Body
- Made in Canada

Dimensions

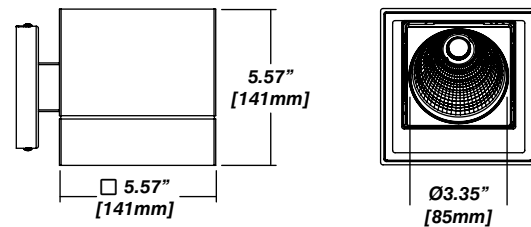

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See Sensolighting.com for more information.

**Full photometric Reports and IES files available for every configuration*

LED Module Performance

Output: Up to 110 lumen/Watt

Efficacy: Color consistency within a 3-MacAdam Ellipse

CCT: 2500K - 6500K

Color Rendering: 93+ CRI

Min. R Values: R^a - 60 R^f - 90 R^g - 100

Driver and Power Consumption

Dimming: 1% dimming standard with 0.1% option
Casambi wireless control available

Ripple: Industry leading Low ripple

Efficiency: Power Factor >0.9

Efficiency over 85%

Class 2 output for safety

Installation: Canopy or remote mounted

| | | | | |
|------------------------|-------|--------|--------|--------|
| Lumen Option | 700lm | 1000lm | 1500lm | 2000lm |
| Fixture Wattage | 6.1W | 9.1W | 14W | 25W |
| Delivered Lumen | 656lm | 1035lm | 1539lm | 1917lm |

Color Metrics

TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

**Full Color Metric Info Available at Sensolighting.com*