


LETO 44 WM UD LRG

WALL MOUNT LED UPLIGHT AND DOWNLIGHT

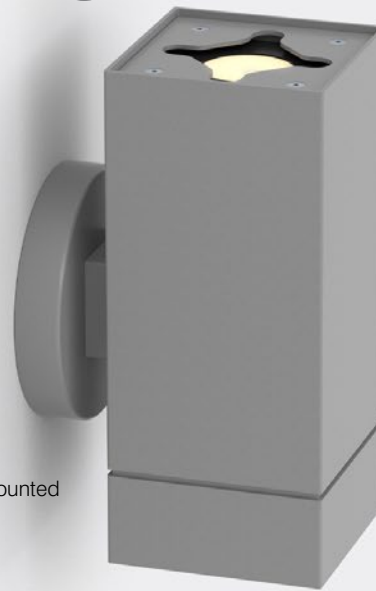

Leto 44 WM UD LRG - Wall Mount LED Light. Leto 44 WM UD LRG is a wall mounted square LED fixture designed to provide a space with indirect and direct lighting.

Ordering Code

Fixture	724							
	1	2	3	4	5	6	7	8
Driver				--	--			
	1	2	3	4	5			

Product Specifications

SAMPLE: Fixture **724 - A90 - 615 - 27 - 0707 - DL - 08 - 01** | Driver **910 - STD - 120 - A90 - 0707**

1 - Model	2 - LED	3 - Optic Direct	4 - CCT	5 - Lumen	6 - Accessory Direct*1
724 · Leto 44 Large Direct and Indirect Wall Mount	A90 · Accuracy 90+ CRI	615 · 15° 630 · 30° 645 · 45° 660 · 60° <i>Fixed 40° indirect optic</i>	25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K	<i>Direct / Indirect</i> 0707 · 700/700 1010 · 1000/1000 <i>For other direct / indirect possibilities please contact factory team</i> Wattage on page 3	00 · No Accessory DL · Diffusing Lens HO · Honeycomb SL · Solite Lens <i>Fixed Diffusing lens for indirect optic</i>

7 - Body Color	8 - Baffle Color	1 - Housing	2 - Driver	Dim Level	
<i>Standard</i> 01 · White 02 · Black 08 · Silver	<i>Premium</i> 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL	<i>Standard</i> 01 · White 02 · Black 08 · Silver	<i>Premium</i> 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL	00 · Integral Driver 910 · Remote Driver Housing	STD · Non Dimming N/A LCS · 0 - 10 Volt Protocol 1% DIM · Phase*2 1% ELDOLC · EldoLED 0 - 10 Volt*3 0.1% DALI · Dali Protocol*3 0.1% LUTES · Hilume Ecodigital*3 1% DMX · Senso*3 EMG · Emergency Driver*3/4 CSMB · Casambi Wireless Control*3/4

3 - Voltage	4 - LED	5 - Lumen	
120 · 120V 277 · 277V 347 · 347V*3/5	Same as Fixture	Same as Fixture	*1 available on downlight only *2 120V only *3 remote mount *4 second driver required *5 not available with ELDO, Lutron or DMX


LETO 44 WM UD LRG

WALL MOUNT LED UPLIGHT AND DOWNLIGHT




Reflector

Senso metal spun faceted reflectors are specifically designed to retain as much light as possible. This results in a more power efficient fixture with a higher delivered lumen.




Accessories


Diffusing Lens



Honeycomb Mesh



Solite Lens




Installation

- Mounting plate included
- Easy, single motion installation method

Construction / Finish

- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Aluminum extruded Body
- Made in Canada


Dimensions

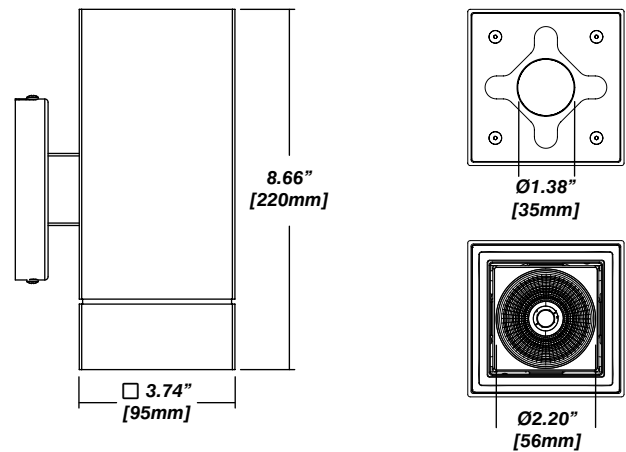

Senso Driver Housings



Single Remote Driver Housing

- Fits Standard, LCS or DIM drivers
- Galvanized steel enclosure
- For remote driver applications






Dimensions

1.5"
[39mm]



Double Remote Driver Housing

- Fits all drivers
- Galvanized steel enclosure
- For remote driver applications



LETO 44 WM UD LRG

WALL MOUNT LED UPLIGHT AND DOWNLIGHT




Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See Sensolighting.com for more information.

**Full photometric Reports and IES files available for every configuration*

Leto 44 Light Distribution

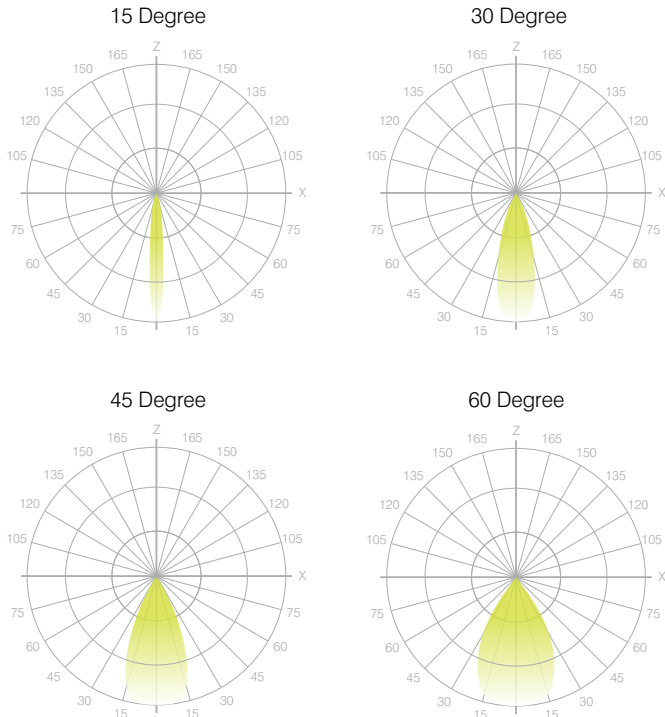

Color Metrics

TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

**Full Color Metric Info Available at Sensolighting.com*

LED Module Performance

- Output:** Up to 111 lumen/Watt
- Efficacy:** Color consistency within a 3-MacAdam Ellipse
- CCT:** 2500K - 6500K
- Color Rendering:** 90+ CRI
- Min. R Values:** R⁹ - 60 R^f - 90 R^a - 100

Driver and Power Consumption

- Dimming:** 1% dimming standard with 0.1% option
Casambi wireless control available
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9
Efficiency over 85%
Class 2 output for safety
- Integral Drivers:** STD, LCS, DIM
All other drivers require remote mounting

Lumen Option	700/700	1000/1000
Fixture Wattage	15W	20W
Delivered Lumen	1312lm	2070lm