




**FWC Wildlife Lighting**  
Florida Wildlife Commission



It is well established that traditional forms of artificial light can disrupt sea turtle hatching patterns and disorient hatchlings. Our **FWC (Florida Wildlife Commission)** certified luminaires feature carefully crafted 590nm LEDs that, when used in conjunction with proper shielding, can help create a safer space for sea turtles and other wildlife.



Product Image

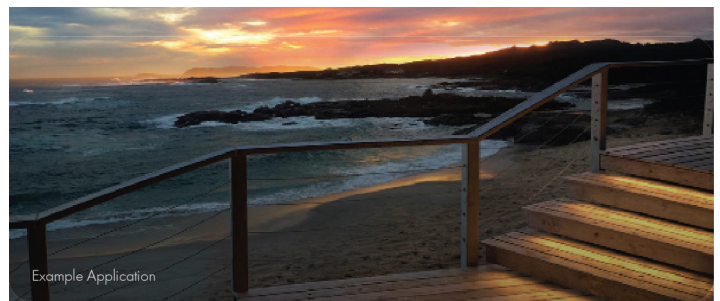

Example Application

**Features**


- IP68 rated for Wet Location
- Approved for use in proximity to wildlife
- 72 lm/ft; 27 lm/Watt
- Carefully crafted 590nm LEDs

**Suggested Applications**


- Handrail
- Corner
- Cove
- Surface Mount
- Recessed

**SECTION START/END OPTIONS**

72" Soldered leads (SL65)




72" Soldered leads (SL68)




No connector (NC)  
IP65 model only



Female quick connect end (F)



Male quick connect end (M)



No connector (NC)  
IP68 model only



**Ordering code**

MODEL	SECTION START	SECTION END	LENGTH
LL36-WL	SL65	NC	
LL36-WL	SL65 - IP65 Soldered lead wires (72") SL68 - IP68 Soldered lead wires (72") F - Female connector M - Male connector NC - No connector	SL65 - IP65 Soldered lead wires (72") SL68 - IP68 Soldered lead wires (72") F - Female connector M - Male connector NC - No connector	view table on page 2 for increment options and maximum run limits

Technical information

Electrical

Input Voltage	24VDC
Power Consumption	3.0 Watts per foot (36 LEDs per foot)
Wire Size	18AWG, 2 wire
Certification	ETL - Conforms to UL Std. 2108; Certified to CSA Std. C22.2 No. 9.0. <b>FWC Wildlife Lighting (#2018-023)</b> - Approved for use in proximity to wildlife. <b>Class 2</b>

Lumen Output

Amber	72.00 lm/ft 27.00 lm/Watt
-------	---------------------------

*Note: Stated lumen values have a tolerance of +/- 10%.*

Physical


Ordering Increment	1.97" (50.00mm)
Operating Temperature	-40°F (-40° C) to +158°F (+70°C)
Environment	Wet Location
Maximum Run Length	32.00' (6096.00mm)
Dimensions	0.42" (10.55mm) x 0.19" (4.88mm) <b>Endcaps</b> - 0.50" (12.70mm) x 0.32" (7.94mm)

Performance

CRI	50,000 Hours
Lumen Maintenance	590 nm
Warranty	3 Years


Dimensions

LL36-WL

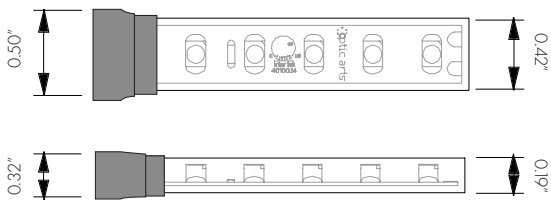

Dimensions




Width	0.42" (10.55mm)
Height	0.19" (4.88mm)
Width (Endcap)	0.50" (12.70mm)
Height (Endcap)	0.32" (7.94mm)
Max Run Length	32.00' (6096.00mm)

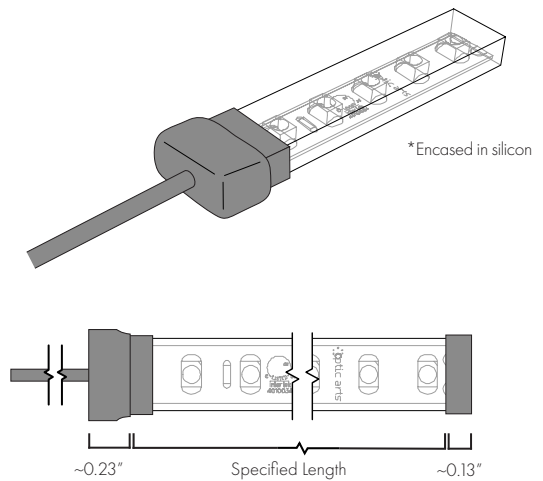

Accessories




**FLEX-ZIP**

Strain Relief Clip




**FLEXMNT-SIL-EXT12**

Outdoor Mounting Clip




TM-30 - 1800K

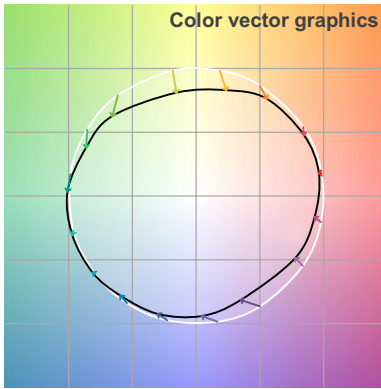


Hue Bin	$R_f$	Graphic shifts (%)	
		Chroma	Hue
1	93	-2%	0%
2	87	-3%	-5%
3	77	-6%	-10%
4	80	-14%	-8%
5	86	-17%	1%
6	73	-11%	13%
7	77	-7%	12%
8	80	0%	14%
9	93	1%	3%
10	95	1%	-2%
11	87	-2%	-7%
12	85	-3%	-8%
13	82	-7%	-11%
14	83	-13%	-10%
15	87	-8%	2%
16	88	-6%	3%

TM-30 - 2350K

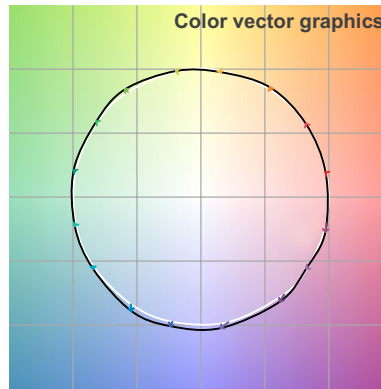


Hue Bin	$R_f$	Graphic shifts (%)	
		Chroma	Hue
1	96	-1%	1%
2	97	0%	1%
3	94	1%	2%
4	95	-1%	-1%
5	95	0%	1%
6	94	3%	1%
7	95	1%	0%
8	97	2%	-1%
9	96	1%	2%
10	96	1%	2%
11	92	4%	3%
12	93	4%	-1%
13	91	3%	-7%
14	90	3%	-6%
15	95	0%	-2%
16	90	1%	-7%

TM-30 - 2750K

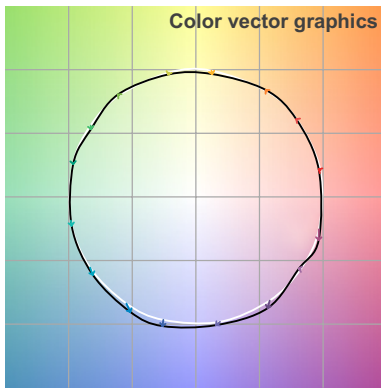


Hue Bin	$R_f$	Graphic shifts (%)	
		Chroma	Hue
1	95	-1%	1%
2	97	0%	1%
3	95	0%	2%
4	93	-3%	-1%
5	95	-1%	1%
6	97	1%	0%
7	92	-2%	2%
8	98	0%	1%
9	93	0%	4%
10	90	1%	6%
11	89	4%	6%
12	91	5%	0%
13	94	2%	-3%
14	91	4%	-5%
15	94	-1%	-1%
16	88	1%	-8%

TM-30 - 2930K

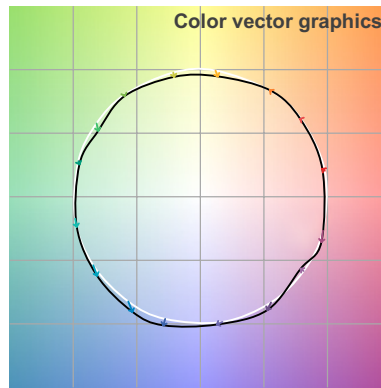

Hue Bin	$R_f$	Graphic shifts (%)	
		Chroma	Hue
1	93	-2%	2%
2	95	0%	1%
3	95	0%	1%
4	91	-4%	-3%
5	94	-3%	0%
6	96	-1%	0%
7	89	-4%	4%
8	95	-1%	2%
9	89	0%	6%
10	86	2%	8%
11	87	5%	7%
12	90	5%	0%
13	93	1%	-5%
14	90	3%	-6%
15	91	-3%	0%
16	87	1%	-9%

TM-30 - 3550K

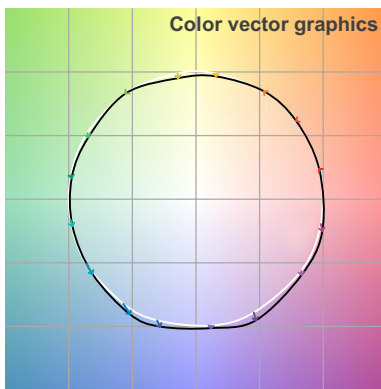


Hue Bin	$R_f$	Graphic shifts (%)	
		Chroma	Hue
1	95	0%	1%
2	97	0%	0%
3	95	0%	1%
4	93	-2%	0%
5	91	-4%	0%
6	96	0%	1%
7	94	-3%	2%
8	95	-1%	2%
9	91	-1%	5%
10	86	0%	9%
11	85	4%	9%
12	89	4%	3%
13	96	2%	-1%
14	92	6%	-2%
15	91	2%	-2%
16	89	2%	-5%

**Power Supplies**

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

**Universal Power Supply 1% 120VAC - 277VAC**

MODEL	POWER	OUTPUT
PDCU-D - IP20 Dry Series	30 - 30 W 60 - 60 W 96 - 96 W 3X96 - 3X96 W	24 - 24 VDC
PDCU-W - IP66 Wet Series	96 - 96 W 3X96 - 3X96 W	

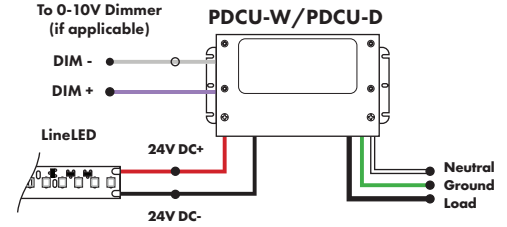


0-10V dims down to 1%, MLV/ELV/TRIAC dims down to 1%.  
For a complete list of compatible dimmers, see [Compatible Dimming Chart](#) on the Resources page.


MODELS	PDCU-W 96W	PDCU-W 3X96W	PDCU-D 30W	PDCU-D 60W	PDCU-D 96W	PDCU-D 3X96W
<b>Length</b>	8.66"	11.85"	6.10"	7.93"	8.25"	9.57"
<b>Width</b>	3.73"	4.32"	3.35"	3.35"	4.10"	5.94"
<b>Depth</b>	1.61"	1.81"	1.33"	1.32"	1.56"	1.13"

**0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC**

MODEL	POWER	OUTPUT	DIMMING
PS010V - 0-10V Power Supply dims down to 0.1%	96 - 96 Watt 3X96 - 3 X 96 Watt	24 - 24 VDC	LIN - Linear LOG - Logarithmic

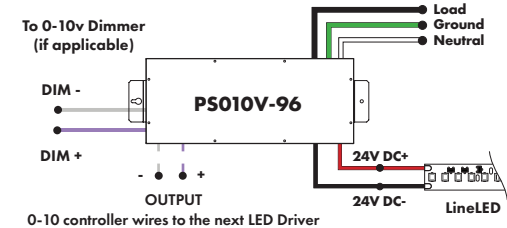


MODELS	96W	3X96
<b>Length</b>	14.40"	15.75"
<b>Width</b>	5.20"	6.62"
<b>Depth</b>	2.60"	4.95"

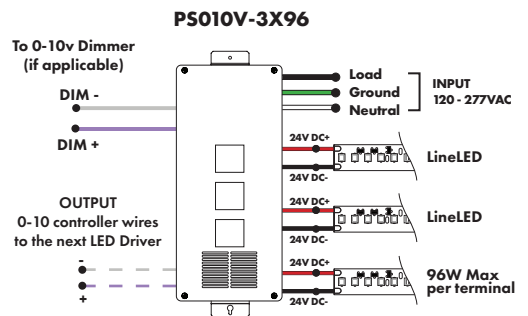

**Triac, MLV, ELV, & PWM Compatible Dimmers**

MODEL	POWER	OUTPUT
PDC - (IP20) Power Supply	96 - 96 Watts	24 - 24 VDC

MODELS	96W
<b>Length</b>	8.25"
<b>Width</b>	4.10"
<b>Depth</b>	1.56"

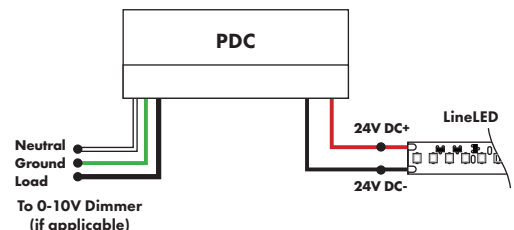

**Power Supplies**



See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

**DMX Dimming Power Supplies 120VAC - 277VAC**

MODEL	POWER	OUTPUT
PSDMX - DMX Power Supply dims down to 0%	96 - 96 Watt 3X96 - 3 X 96 Watt	24 - 24 VDC

Features eldoLED's LINEARdrive configurable dimmable drivers

MODELS	96W	3X96
<b>Length</b>	14.40"	15.75"
<b>Width</b>	5.20"	6.62"
<b>Depth</b>	2.60"	4.95"

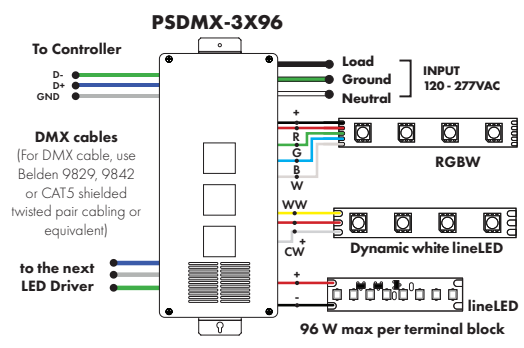
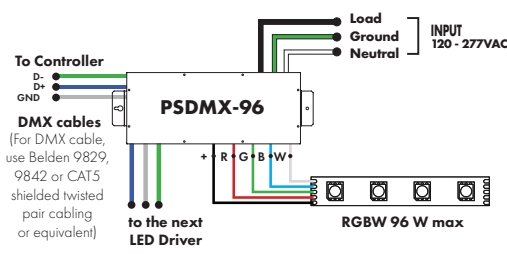


**DALI 0% Dimming Power Supplies 120VAC - 277VAC**

MODEL	POWER	OUTPUT
PSDALI - DALI Power Supply dims down to 0%	96 - 96 Watt 3X96 - 3 X 96 Watt	24 - 24 VDC

Features eldoLED's LINEARdrive configurable dimmable drivers


Model	96W	3X96
<b>Length</b>	14.40"	15.75"
<b>Width</b>	5.20"	6.62"
<b>Depth</b>	2.60"	4.95"

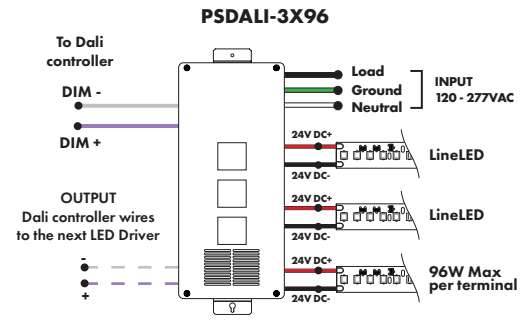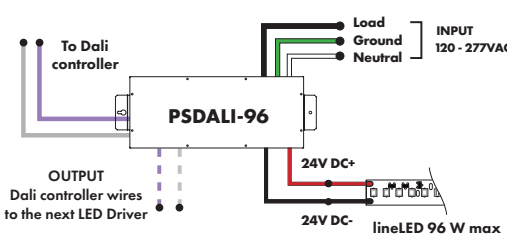

**Enlighted Enabled Dimming Power Supplies 120VAC - 277VAC**

MODEL	POWER	OUTPUT	DIMMING	LOCATION
PSV - PSV Series	96 - 96 Watt	24 - 24 VDC	ENL - Enlighted Dimming dims down to 0%	D - Damp

Model	96W
<b>Length</b>	14.40"
<b>Width</b>	5.20"
<b>Depth</b>	2.60"

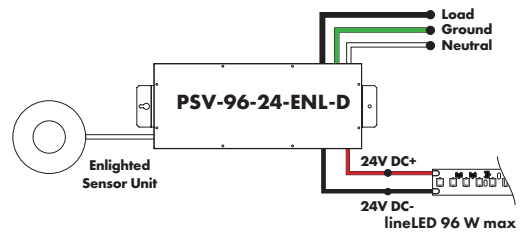


**Power Supplies**

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

**Non-Dimming Power Supply 120VAC - 277VAC**

MODEL	POWER	OUTPUT	DIMMING	LOCATION
PSV - PSV Series	96 - 96 Watt	24 - 24 VDC	U2ND - Non Dimming	D - Damp

MODELS	96W
<b>Length</b>	14.40"
<b>Width</b>	5.20"
<b>Depth</b>	2.60"


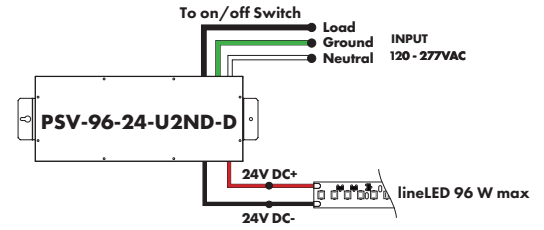


Luminii is a Lutron OEM Advantage Partner

**Lutron Power Supplies 1%**

MODEL	MODEL
<b>LTEA4U1UKL-CV240</b>	<b>L3DA4U1UKL-CV240</b>
Lutron - HiLume™ 1% 2-wire LED Driver 40W max	HiLume™ 1% EcoSystem Voltage LED driver 40W max
(120V forward phase only)	

MODELS	LTEA4U1UKL-CV240	L3DA4U1UKL-CV240
<b>Length</b>	4.89"	4.98"
<b>Width</b>	4.00"	4.00"
<b>Depth</b>	2.62"	2.62"

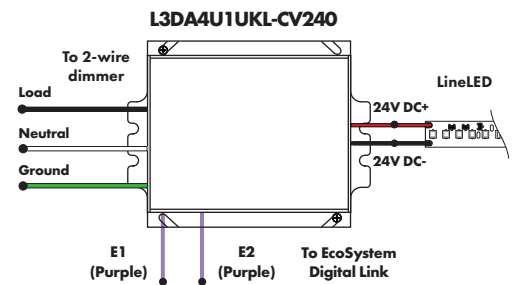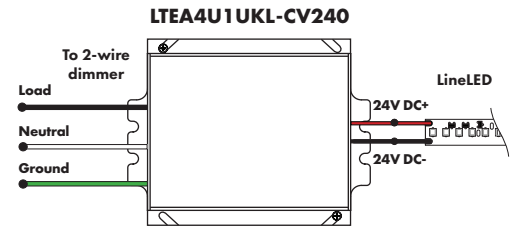


Luminii is a Lutron OEM Advantage Partner

**Lutron Power Supplies 0.1%**

MODEL
<b>L3D0-96W24V-U</b>
HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™ 96W max

MODELS	L3D0
<b>Length</b>	10.50"
<b>Width</b>	5.50"
<b>Depth</b>	2.00"

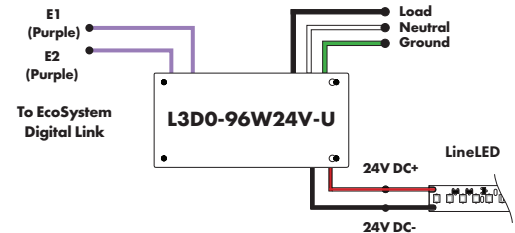

**In-Ground Power Supplies**

MODEL	POWER	OUTPUT	INPUT
IG - In ground CVE Series	CVE - ELV Dimming DALI - eidoLED Dali dimming Both dims down to 0%	96X2 - 2 X 96 Watt	24 - 24 VDC
			Blank - 120 V 277 - 240/277 V

MODELS	Dual Circuit
<b>Length</b>	8.40"
<b>Width</b>	8.30"
<b>Depth</b>	8.10"

