

# LineLED 24V - Installation Instructions

Models LL36X2

Please read complete instruction prior to installation and keep for future reference!

1. Product should be installed by a qualified electrician.
2. Prior to installation ensure power is off at fuse box to prevent electrical shock.
3. Use only with Class 2 power unit. *Utiliser seulement avec Classe 2 unite d'alimentation electrique.*
4. Suitable for Damp Locations. *Convient Aux Emplacements Humides.*
5. For under-cabinet or shelf mount.
6. Conforms to UL STD 2108. Certified to CSA STD C22.2 No.250.0.



Page 1 of 2





7777 N. Merrimac Ave  
Niles, IL 60714  
T 224.333.6033  
F 224.757.7557  
info@luminii.com  
www.luminii.com

**Attention:** Always test LineLED operation before installing. Connect LineLED to power supply to ensure it is working properly and no damage has occurred during shipping.


**1** Clean the area thoroughly where the LineLED will be installed.

Remove the paper backing from the LineLED and firmly press down making sure there are no air bubbles that can cause surface irregularities. **Do not remove the adhesive, removing the adhesive may cause arcing of the Line LED tape.**

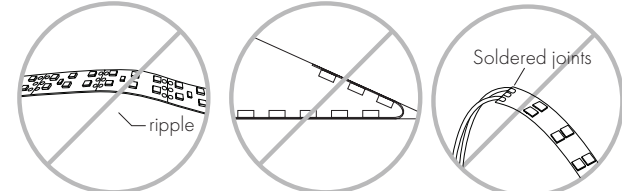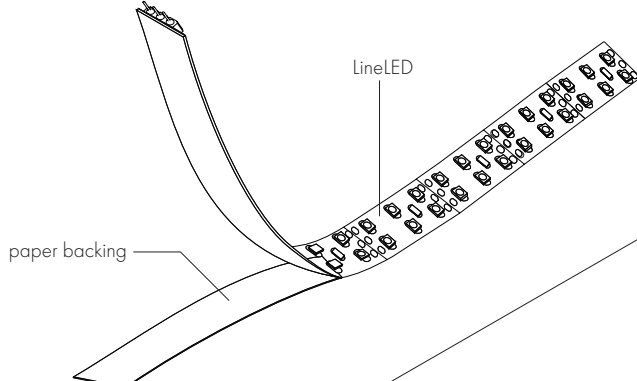

**NOTE** - When removing backing & laying LineLED to surface avoid installing with ripples & bending over 90°.

**NOTE** - Avoid sharp bends or bending on the solder joints near 1" on wire lead.

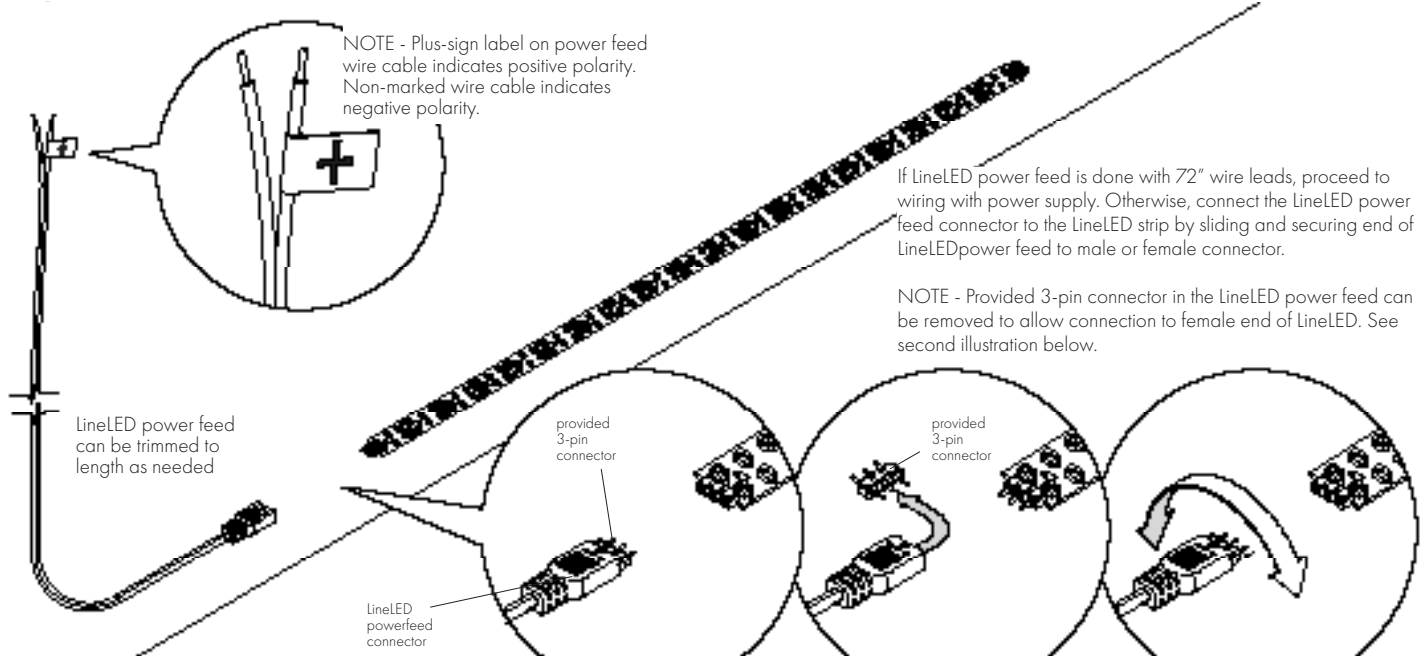

**NOTE** - Plus-sign label on power feed wire cable indicates positive polarity. Non-marked wire cable indicates negative polarity.

If LineLED power feed is done with 72" wire leads, proceed to wiring with power supply. Otherwise, connect the LineLED power feed connector to the LineLED strip by sliding and securing end of LineLED power feed to male or female connector.

**NOTE** - Provided 3-pin connector in the LineLED power feed can be removed to allow connection to female end of LineLED. See second illustration below.

Align LineLED power feed connector pins with female end of LineLED and push-in to secure connection.

If LineLED has a male end, carefully remove the provided 3-pin connector from the LineLED power feed connector. Align LineLED power feed connector with male end of LineLED and push-in to secure connection.

LineLED power feed connector can be installed in any orientation concerning polarity since the center pin is positive and the two outer pins are negative.

# LineLED 24V - Installation Instructions

Models LL36X2

**Please read complete instruction prior to installation and keep for future reference!**

1. Product should be installed by a qualified electrician.
2. Prior to installation ensure power is off at fuse box to prevent electrical shock.
3. Use only with Class 2 power unit. *Utiliser seulement avec Classe 2 unite d'alimentation electrique.*
4. Suitable for Damp Locations. *Convient Aux Emplacements Humides.*
5. For under-cabinet or shelf mount.
6. Conforms to UL STD 2108. Certified to CSA STD C22.2 No.250.0.



Page 2 of 2




7777 N. Merrimac Ave  
Niles, IL 60714  
T 224.333.6033  
F 224.757.7557  
info@luminii.com  
www.luminii.com

**3**

## RECOMMENDED LAYOUT FOR MULTIPLE ADJACENT RUNS OF LINELED FED WITH SEPARATE POWER SUPPLIES

Position power supplies either in the middle of two runs or at the opposite ends.

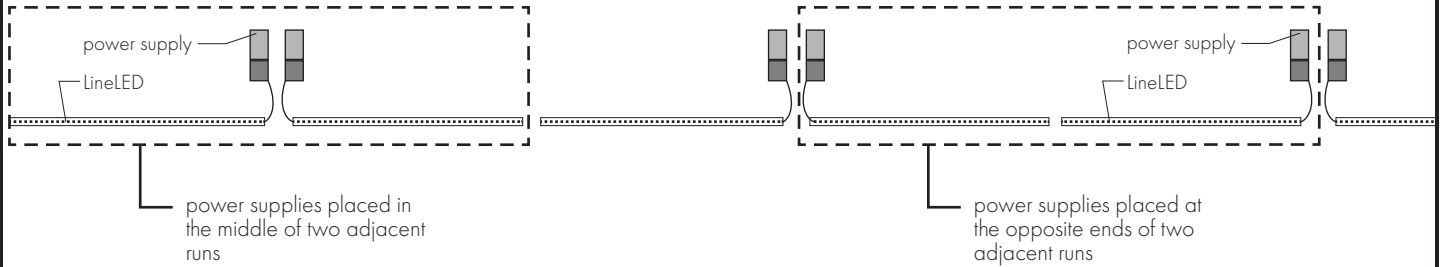

**4**

Always ensure power to power supply is off! Follow diagrams to connect power feed wires to power supply. Refer to power supply instructions for wiring line voltage side.

Connect positive wire (plus sign tag or red wire) to RED low voltage wire from power supply. Also, connect negative wire (no tag or black wire) to BLACK low voltage wire from power supply.

