

Myka Recessed Assymmetric Trimmed - Installation Instructions

Models MKRA-XX

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE WHEN USED WITH TAPE OUTPUTS 5.7W/FT OR LESS
6. TYPE IC (CEILING & WALL).
7. SUITABLE FOR GROUND MOUNTED-RECESSED, ACCESS ABOVE CEILING REQUIRED.

PLENUM FOR
SUCH USE IN
ACCORDANCE
WITH UL2043




REVO.1
02022024

1 / 3



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

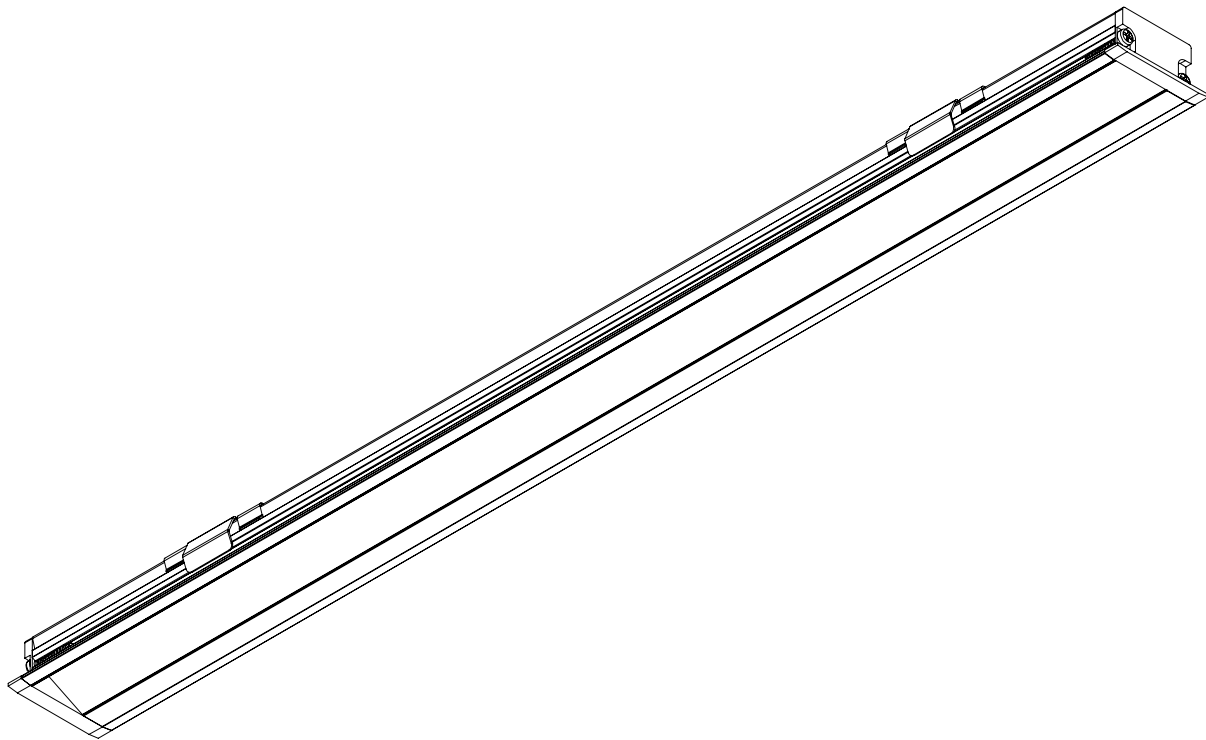

Myka Recessed Assymmetric w/ Hard Surface Mounting

Myka Recessed Assymmetric Trimmed - Installation Instructions

Models MKRA-XX



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE WHEN USED WITH TAPE OUTPUTS 5.7W/FT OR LESS
6. TYPE IC (CEILING & WALL).
7. SUITABLE FOR GROUND MOUNTED-RECESSED, ACCESS ABOVE CEILING REQUIRED.

PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043

REVO.1
02022024

2 / 3

1

Note: The fixtures can be installed in various mounting materials. As long as the recessed depth is considered as shown below. These light fixtures can be installed in a up or down position. Reference specific model for accurate dimensions.

1.1 Myka Recessed Asymmetric with the Hard Surface Mounting brackets.

2

2.1 Route slots onto the surface with the proper width and depth to accommodate aluminum extrusion. Use drawing above as reference.

3

3.1 For mounting bracket options only:
Prior to installing the fixture, slide the mounting brackets on the back of the fixture. To evenly distribute the weight of the fixture.

hard surface mounting bracket,
such as wood, stone, tile

TOP VIEW

FRONT VIEW

Myka Recessed Assymetric Trimmed - Installation Instructions

Models MKRA-XX



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. SUITABLE FOR INSTALLATION WITHIN THE CLOSET STORAGE SPACE WHEN USED WITH TAPE OUTPUTS 5.7W/FT OR LESS
6. TYPE IC (CEILING & WALL).
7. SUITABLE FOR GROUND MOUNTED-RECESSED, ACCESS ABOVE CEILING REQUIRED.

PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043

REVO.1
02022024


3 / 3

4

Note: Fixture wires must be considered, prior to installing. Reference wiring diagram for additional information on step 5.


Note: Follow the mounting option, to properly install fixture.

HS mounting:
Hard surface
mounting bracket

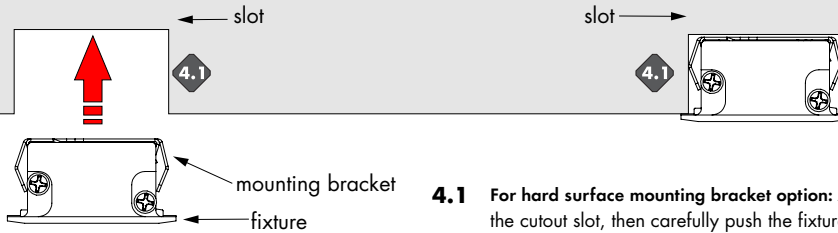

4.1 For hard surface mounting bracket option: Align the mounting brackets to the cutout slot, then carefully push the fixture completely inside to the slot to secure.

5

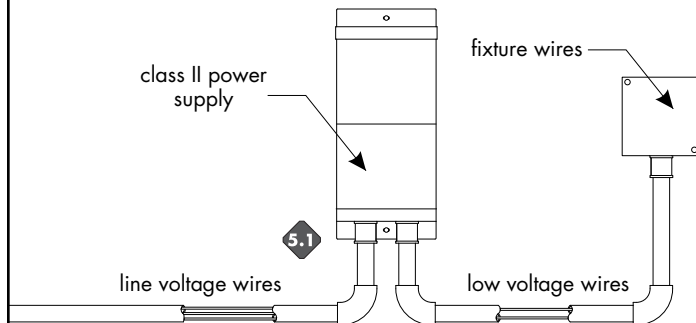

5.1 Ensure the correct (wattage & voltage) power supply is used to power the fixture. Then proceed to connect the fixture wires from fixture to the power supply. For more information please refer to power supply wiring instructions.