



Features

Class 2 Dali controlled power supply features eldoLED's LINEARdrive configurable Dali drivers allowing independent control of 3 outputs rated at 96 watt each. Suitable For Damp Location.



PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043

Technical information

Input voltage

120-277V AC, 3.3A, 50/60Hz

Output signal

24 VDC, 3 x 4.0 A

Maximum wattage

3 x 96 watt circuits

Mounting

Surface mounted with conduit access

Dimming curve

Linear, Logarithmic (programmable)

Dimming

100% - 0% (HydraDrive)

Ambient Operating Temperature



-20C to +35C

JA8 compliant


When used with models: LLDW36, LLDW52, or LLDW73STP

Weight

9.6 lbs

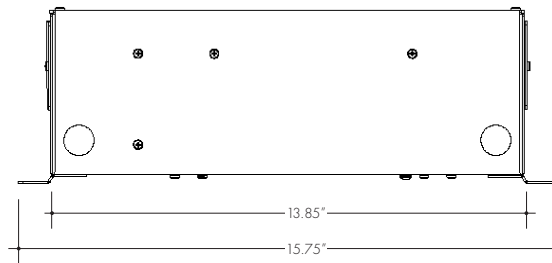

Wiring diagram

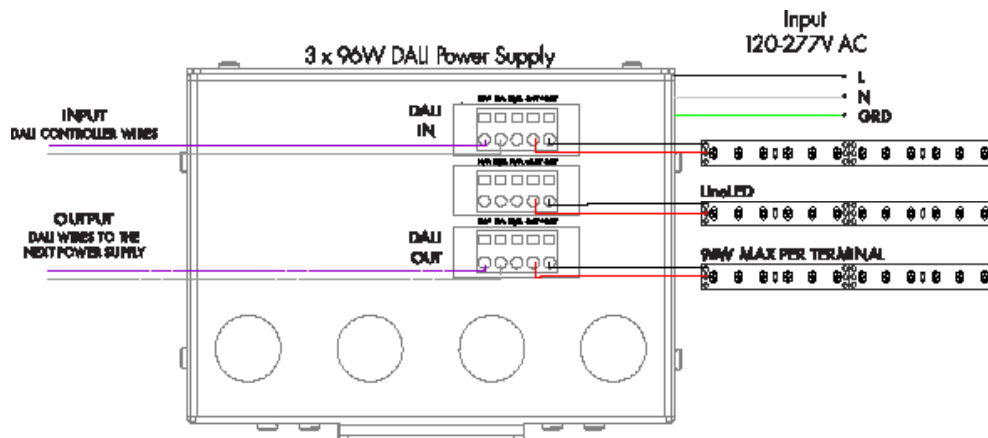

Ordering code

MODEL	POWER	OUTPUT
PSDALI	3X96	24
PSDALI - DALI LED Driver	3X96 - 3 x 96 Watt	24 - 24 VDC