



## Features

Class 2 Dali controlled power supply features eldoLED's LINEARdrive configurable Dali drivers allowing independent control of 3 outputs rated at 96 watt each. Suitable For Damp Location.



PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043

## Technical information

### Input voltage

120-277V AC, 3.3A, 50/60Hz

### Output signal

24 VDC, 3 x 4.0 A

### Maximum wattage

3 x 96 watt circuits

### Mounting

Surface mounted with conduit access

### Dimming curve

Linear, Logarithmic (programmable)

### Dimming

100% - 0% (HydraDrive)

### Ambient Operating Temperature


-20C to +35C

### JA8 compliant


When used with models: LLDW36, LLDW52, or LLDW73STP

### Weight

9.6 lbs

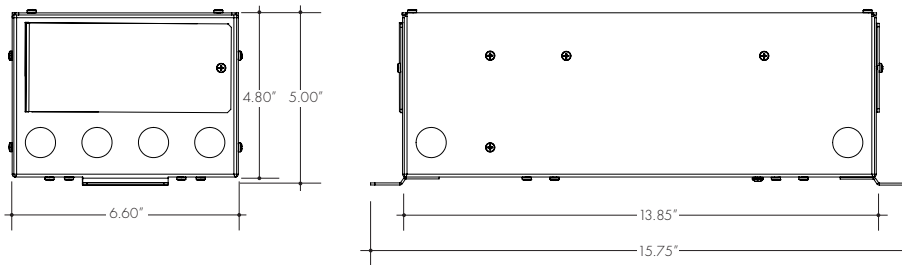

## Wiring diagram

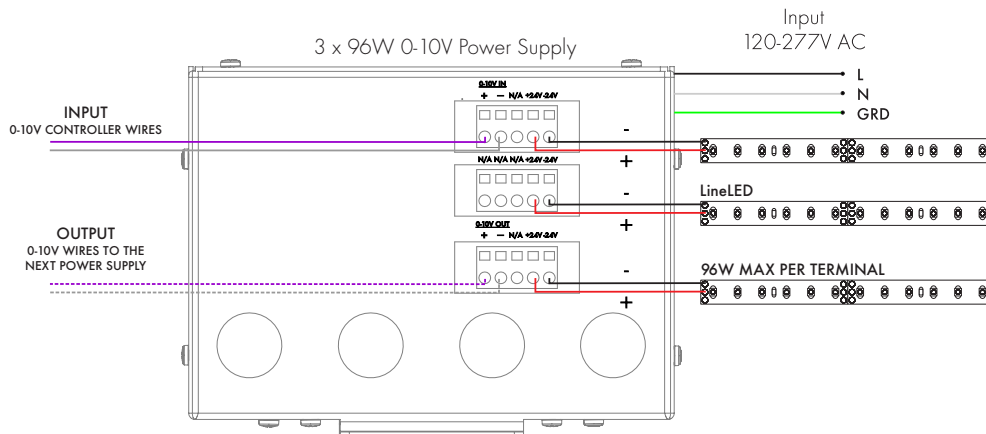

## Ordering code

MODEL	POWER	OUTPUT
PSDALI	3X96	24

PSDALI - DALLI LED Driver    3X96 - 3 x 96 Watt    24 - 24 VDC