
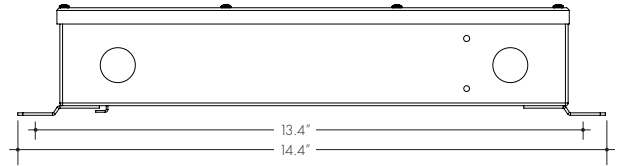


PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043



Features

Class 2 Dali controlled LED Driver features eldoLED's LINEARdrive configurable Dali drivers rated at 96 watt each. Suitable For Damp Location.

Features

Input voltage

120-277V AC, 1.1A, 50/60Hz

Output signal

24 VDC, 4.0 A

Maximum wattage

96 watt circuits

Dimming curve

Linear, Logarithmic (programmable)

Dimming

100% - 0% (HydraDrive)

Ambient Operating Temperature

-20°C - 35°C

JA8 Compliant

When used with models: ILLDW36, ILLDW52, or ILLDW73STP

Weight


13 lbs

Mounting


Surface mounted with conduit access

Wiring Diagram

Dali

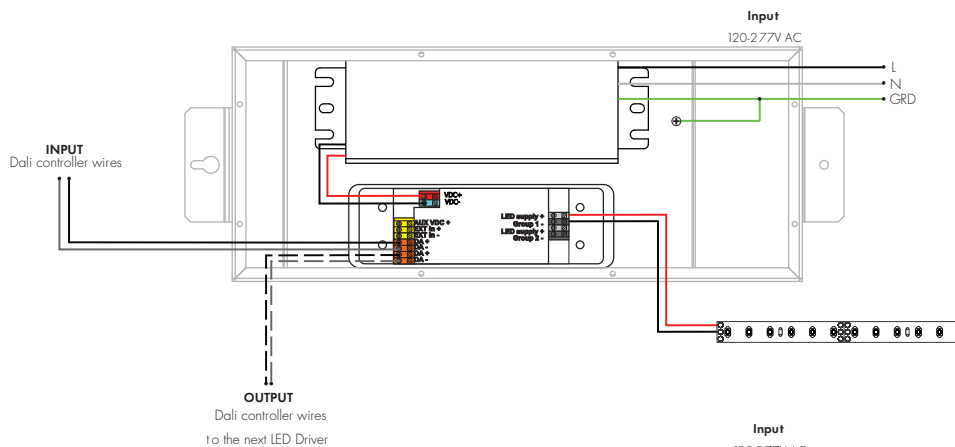

Dali-DT8

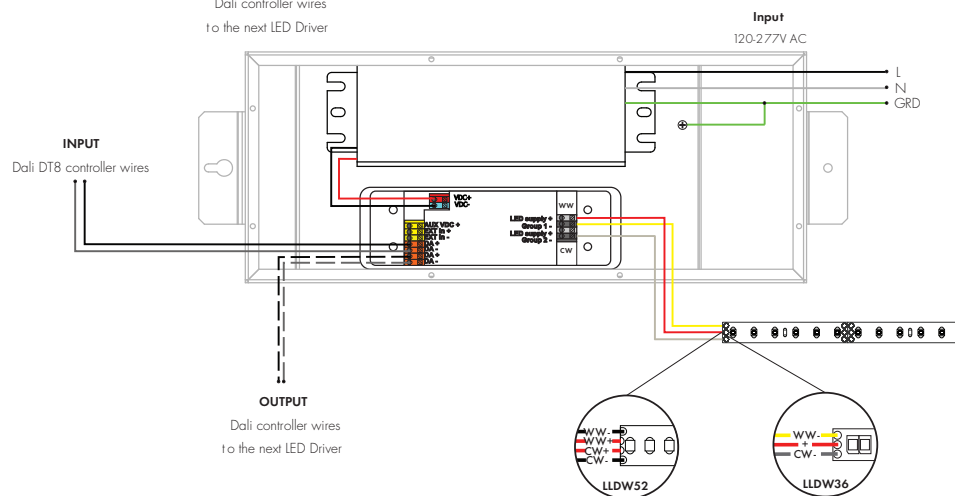

Ordering Code

MODEL	POWER	OUTPUT
PSDALI - DALI LED Driver	96 - 96 Watt	24 - 24 VDC
PSDALI-DT8 - DALI-DT8 LED Driver		