



With high efficiency and universal AC input, the PSV series class 2 power supplies are suitable for indoor applications and ideal for use with LED lighting. Cooling is achieved by free air convection.

- **Input voltage**
120 to 277 VAC
- **Output voltage**
24VDC
- **Safety**
UL 8750
- **Weight**
2.5 lbs
- **Warranty**
5 years



Technical information

Frequency

50 – 60Hz

Efficiency

92%

Start-up time



500ms

Ripple

<5%

Weight

2.5 lbs

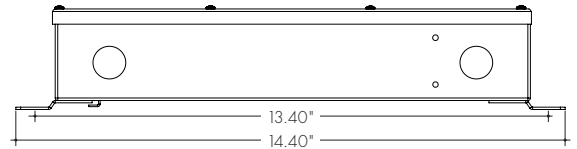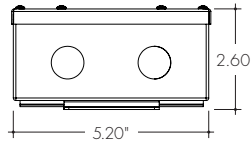

Ordering code

MODEL	POWER	OUTPUT	DIMMING	LOCATION
PSV	96	24	U2ND	D
PSV - PSV Series	96 - 96 W	24 - 24 VDC	U2ND - Non Dimming	D - Dry Location