

Features



- Constant voltage output
- Input Voltage, 120-277VAC
- Cooling by free air convection
- 5 year Warranty
- Full protection metal case
- Auto reset breakers, from short circuit, overloading, & over temperature
- Dry location (IP20)

- UL LISTED
- FC
- RoHS
- IP20

Technical Information

Input voltage

120-277V AC, 0.95A, 50/60Hz

Output signal

24 VDC, 4.0 A

Maximum wattage

96 watt circuits

Mounting

Surface mounted with conduit access

Ambient Operating Temperature

-40° – 140°F

Weight

2.2 lbs

Efficiency


88% at 120V, 89% at 277V

Ripple


<9%

Start-up Time

500ms

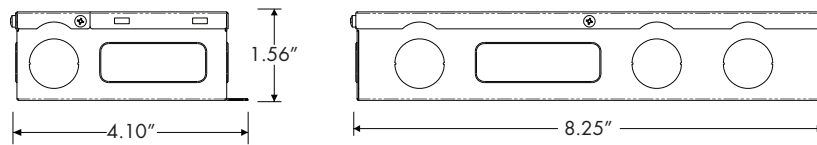

Wiring Diagram

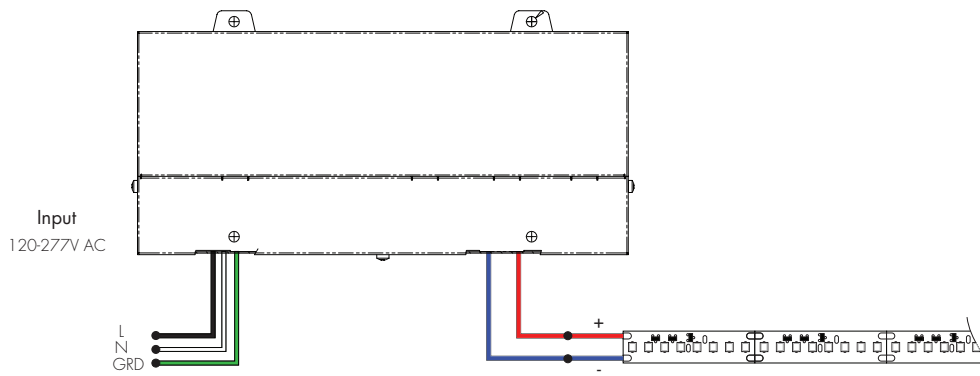

Ordering Code

