

ULTRA NARROW



TECHNICAL DESCRIPTION

Solo 11 Stucchi is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The ultra narrow beam in our 4.20W 415lm module has a peak intensity of 7259cd. An accessory holder is available separately that can accommodate 37mm (1.45") lenses and louvers. This product requires an external 48V Constant Voltage LED power supply.

MECHANICAL & ELECTRICAL

CATEGORY IP20	WATTAGE 4.20W
MATERIAL Machined AL 6063-T6 Machined Brass	FORWARD VOLTAGE 48V
PAN 360°	SUPPLY TYPE Constant Voltage
TILT 90°	DRIVER LOCATION Remote AC to 48VDC
LOCKABLE Pan	DIMMING DALI
WEIGHT 170g 235g 0.37lb 0.52lb*	

MOUNTING

MOUNTING 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended


FINISHES

FINISHES Brushed Aluminium | White RAL9010 | Black RAL9005 | Rubbed Bronze* | Polished Brass* | Brushed Brass *

*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.


OPTICAL & STANDARDS

NOMINAL LUMENS 415lm	BEAM ANGLE 11°
DELIVERED LUMENS 396lm	CRI 92 TYP
COLOUR TEMPERATURE 2700K 3000K	TM-30 RF: 90 RG: 99
ACCESSORY HOLDER Separate	WARRANTY 5 Years
ACCESSORIES Lenses Louver 37mm (1.45")	STANDARDS

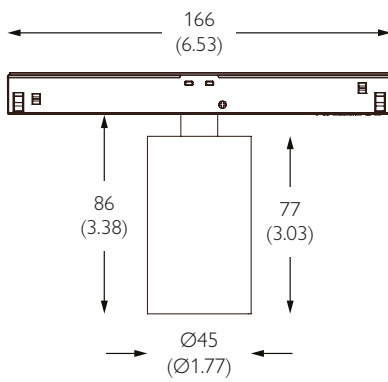

mm (inches)

Photometry shown is for 3000K module. Please enquire for other CCT photometry. L90 50,000 hours.

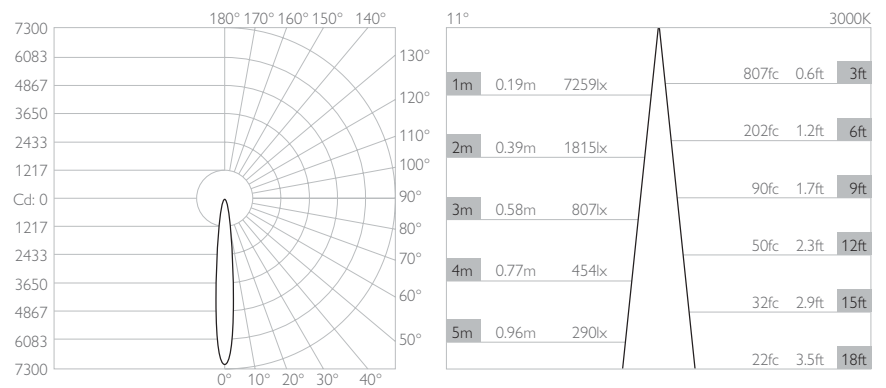

LUMINAIRE FINISH

	White 9016	Black 9005	Brushed Aluminium	Rubbed Bronze*	Polished Brass*	Brushed Brass*
TRACK & ADAPTOR	White 9016	Black 9005				
	1042-TW-XX9209	1042-TW-BK-XX9209	1042-TW-AL-XX9209	1042-TW-RB-XX9209	1042-TW-PB-XX9209	1042-TW-SB-XX9209

*All premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

NARROW



TECHNICAL DESCRIPTION

Solo 11 Stucchi is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The narrow beam in our 4.20W 415lm module has a peak intensity of 5422cd. An accessory holder is available separately that can accommodate 37mm (1.45") lenses and louvers. This product requires an external 48V Constant Voltage LED power supply.

MECHANICAL & ELECTRICAL

CATEGORY IP20	WATTAGE 4.20W
MATERIAL Machined AL 6063-T6 Machined Brass	FORWARD VOLTAGE 48V
PAN 360°	SUPPLY TYPE Constant Voltage
TILT 90°	DRIVER LOCATION Remote AC to 48VDC
LOCKABLE Pan	DIMMING DALI
WEIGHT 170g 235g 0.37lb 0.52lb*	

MOUNTING

MOUNTING 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended


FINISHES

FINISHES Brushed Aluminium | White RAL9010 | Black RAL9005 | Rubbed Bronze* | Polished Brass* | Brushed Brass *

*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.


OPTICAL & STANDARDS

NOMINAL LUMENS 415lm	BEAM ANGLE 14°
DELIVERED LUMENS 413lm	CRI 92 TYP
COLOUR TEMPERATURE 2700K 3000K	TM-30 RF: 90 RG: 99
ACCESSORY HOLDER Separate	WARRANTY 5 Years
ACCESSORIES Lenses Louver 37mm (1.45")	STANDARDS

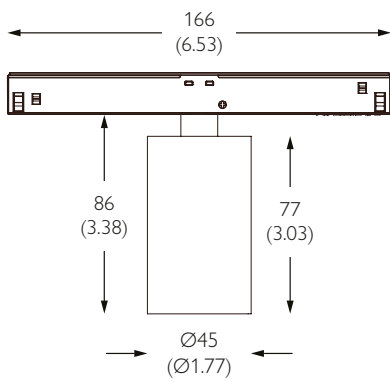

mm (inches)

Photometry shown is for 3000K module. Please enquire for other CCT photometry. L90 50,000 hours.

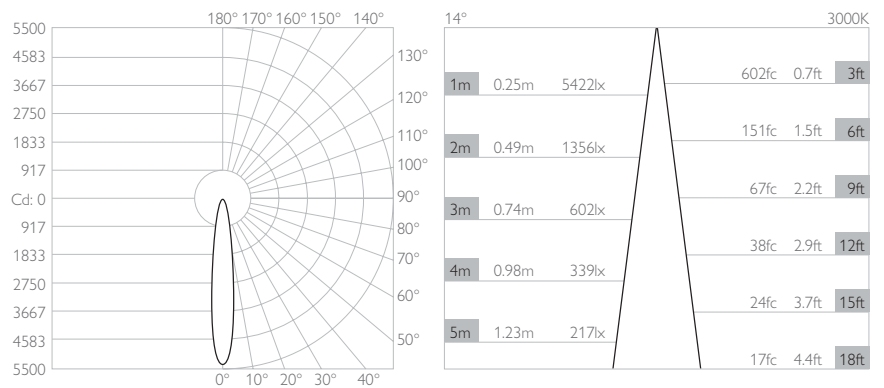

LUMINAIRE FINISH

	White 9016	Black 9005	Brushed Aluminium	Rubbed Bronze*	Polished Brass*	Brushed Brass*	
TRACK & ADAPTOR	White 9016	1042-TW-XX9211	1042-TW-BK-XX9211	1042-TW-AL-XX9211	1042-TW-RB-XX9211	1042-TW-PB-XX9211	1042-TW-SB-XX9211
	Black 9005	1042-BK-TW-XX9211	1042-BK-XX9211	1042-AL-XX9211	1042-RB-XX9211	1042-PB-XX9211	1042-SB-XX9211

*All premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ

For 3000K Substitute XX with 30

For 2700K Substitute XX with 27

MEDIUM



TECHNICAL DESCRIPTION

Solo 11 Stucchi is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The medium beam in our 4.20W 415lm module has a peak intensity of 3338cd. An accessory holder is available separately that can accommodate 37mm (1.45") lenses and louvers. This product requires an external 48V Constant Voltage LED power supply.

MECHANICAL & ELECTRICAL

CATEGORY IP20	WATTAGE 4.20W
MATERIAL Machined AL 6063-T6 Machined Brass	FORWARD VOLTAGE 48V
PAN 360°	SUPPLY TYPE Constant Voltage
TILT 90°	DRIVER LOCATION Remote AC to 48VDC
LOCKABLE Pan	DIMMING DALI
WEIGHT 170g 235g 0.37lb 0.52lb*	

MOUNTING

MOUNTING 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended


FINISHES

FINISHES Brushed Aluminium | White RAL9010 | Black RAL9005 | Rubbed Bronze* | Polished Brass* | Brushed Brass *

*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.


OPTICAL & STANDARDS

NOMINAL LUMENS 415lm	BEAM ANGLE 18°
DELIVERED LUMENS 391lm	CRI 92 TYP
COLOUR TEMPERATURE 2700K 3000K	TM-30 RF: 90 RG: 99
ACCESSORY HOLDER Separate	WARRANTY 5 Years
ACCESSORIES Lenses Louver 37mm (1.45")	STANDARDS

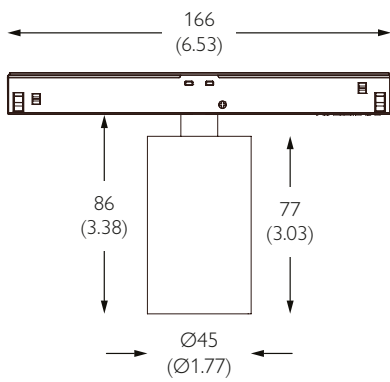

mm (inches)

Photometry shown is for 3000K module. Please enquire for other CCT photometry. L90 50,000 hours.

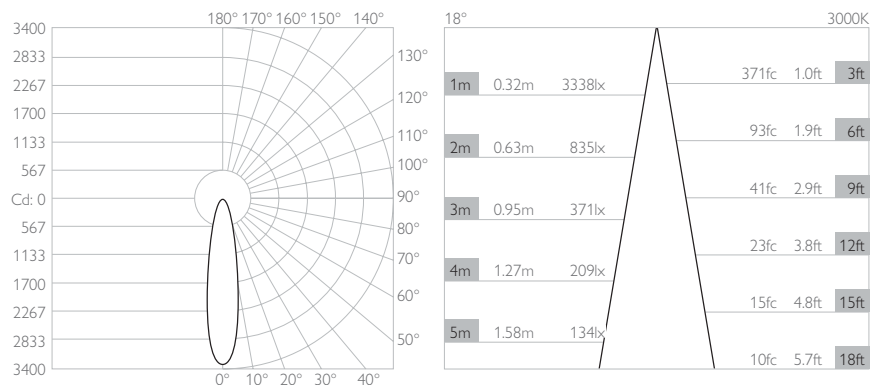

LUMINAIRE FINISH

	White 9016	Black 9005	Brushed Aluminium	Rubbed Bronze*	Polished Brass*	Brushed Brass*	
TRACK & ADAPTOR	White 9016	1042-TW-XX9215	1042-TW-BK-XX9215	1042-TW-AL-XX9215	1042-TW-RB-XX9215	1042-TW-PB-XX9215	1042-TW-SB-XX9215
	Black 9005	1042-BK-TW-XX9215	1042-BK-XX9215	1042-AL-XX9215	1042-RB-XX9215	1042-PB-XX9215	1042-SB-XX9215

*All premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ

For 3000K Substitute XX with 30

For 2700K Substitute XX with 27

FLOOD



TECHNICAL DESCRIPTION

Solo 11 Stucchi is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The flood beam in our 4.20W 415lm module has a peak intensity of 1052cd. An accessory holder is available separately that can accommodate 37mm (1.45") lenses and louvers. This product requires an external 48V Constant Voltage LED power supply.

MECHANICAL & ELECTRICAL

CATEGORY IP20	WATTAGE 4.20W
MATERIAL Machined AL 6063-T6 Machined Brass	FORWARD VOLTAGE 48V
PAN 360°	SUPPLY TYPE Constant Voltage
TILT 90°	DRIVER LOCATION Remote AC to 48VDC
LOCKABLE Pan	DIMMING DALI
WEIGHT 170g 235g 0.37lb 0.52lb*	

MOUNTING

MOUNTING 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended


FINISHES

FINISHES Brushed Aluminium | White RAL9010 | Black RAL9005 | Rubbed Bronze* | Polished Brass* | Brushed Brass *

*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.


OPTICAL & STANDARDS

NOMINAL LUMENS 415lm	BEAM ANGLE 30°
DELIVERED LUMENS 322lm	CRI 92 TYP
COLOUR TEMPERATURE 2700K 3000K	TM-30 RF: 90 RG: 99
ACCESSORY HOLDER Separate	WARRANTY 5 Years
ACCESSORIES Lenses Louver 37mm (1.45")	STANDARDS

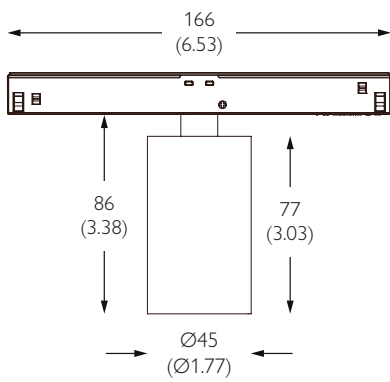

mm (inches)

Photometry shown is for 3000K module. Please enquire for other CCT photometry. L90 50,000 hours.

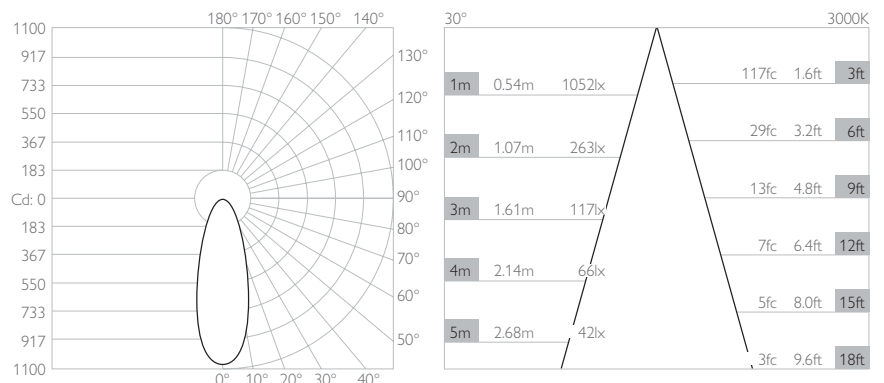

LUMINAIRE FINISH

	White 9016	Black 9005	Brushed Aluminium	Rubbed Bronze*	Polished Brass*	Brushed Brass*
TRACK & ADAPTOR	White 9016	Black 9005				
	1042-TW-XX9225	1042-TW-BK-XX9225	1042-TW-AL-XX9225	1042-TW-RB-XX9225	1042-TW-PB-XX9225	1042-TW-SB-XX9225
		1042-BK-TW-XX9225	1042-BK-XX9225	1042-AL-XX9225	1042-RB-XX9225	1042-PB-XX9225
					1042-PB-XX9225	1042-SB-XX9225

*All premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ

For 3000K Substitute XX with 30

For 2700K Substitute XX with 27

SOLO 11 STUCCHI

WIDE FLOOD



TECHNICAL DESCRIPTION

Solo 11 Stucchi is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. The wide flood beam in our 4.20W 415lm module has a peak intensity of 383cd. An accessory holder is available separately that can accommodate 37mm (1.45") lenses and louvers. This product requires an external 48V Constant Voltage LED power supply.

MECHANICAL & ELECTRICAL

CATEGORY IP20	WATTAGE 4.20W
MATERIAL Machined AL 6063-T6 Machined Brass	FORWARD VOLTAGE 48V
PAN 360°	SUPPLY TYPE Constant Voltage
TILT 90°	DRIVER LOCATION Remote AC to 48VDC
LOCKABLE Pan	DIMMING DALI
WEIGHT 170g 235g 0.37lb 0.52lb*	

MOUNTING

MOUNTING 48V Stucchi Track Recessed | Trimless Recessed | Surface | Suspended


FINISHES

FINISHES Brushed Aluminium | White RAL9010 | Black RAL9005 | Rubbed Bronze* | Polished Brass* | Brushed Brass *

*Premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ.


OPTICAL & STANDARDS

NOMINAL LUMENS 415lm	BEAM ANGLE 50°
DELIVERED LUMENS 317lm	CRI 92 TYP
COLOUR TEMPERATURE 2700K 3000K	TM-30 RF: 90 RG: 99
ACCESSORY HOLDER Separate	WARRANTY 5 Years
ACCESSORIES Lenses Louver 37mm (1.45")	STANDARDS

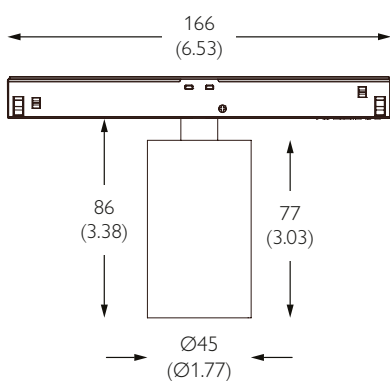

mm (inches)

Photometry shown is for 3000K module. Please enquire for other CCT photometry. L90 50,000 hours.

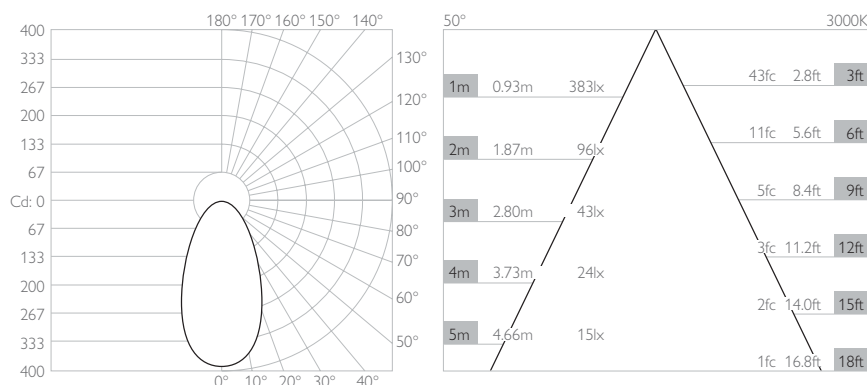

LUMINAIRE FINISH



TRACK & ADAPTOR

White 9016	1042-TW-XX9245	1042-TW-BK-XX9245	1042-TW-AL-XX9245	1042-TW-RB-XX9245	1042-TW-PB-XX9245	1042-TW-SB-XX9245
Black 9005	1042-BK-TW-XX9245	1042-BK-XX9245	1042-AL-XX9245	1042-RB-XX9245	1042-PB-XX9245	1042-SB-XX9245

*All premium & custom finishes are built & finished to order. These are subject to an extended lead time & MOQ

For 3000K Substitute XX with 30

For 2700K Substitute XX with 27