



Features

- Constant voltage output
- Input Voltage, 120-277VAC
- Compatible with Triac, MLV, ELV, & 0-10V Dimmers
- Flicker-free dimming
- Cooling by free air convection
- Full protection metal case
- Auto reset breakers, from short circuit, overloading, & over temperature
- Load 10 – 100%
- Dry location (IP20)
- 5 year Warranty



Technical Information

Input voltage

120-277V AC, 1.1A, 50/60Hz

Output signal

24 VDC, 4.0 A

Maximum wattage

96 watt circuits

Dimming curve

Linear, 100% - 0% (HydraDrive)

Dimming

Standard Two Channel: Dim 1: Intensity; Dim 2: CCT

Ambient Operating Temperature


-20C to +35C

Mounting


Surface mounted with conduit access

Weight

3.8 lbs

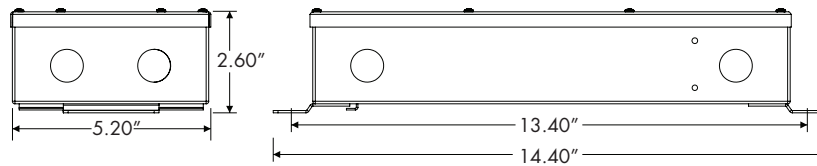

Wiring Diagram

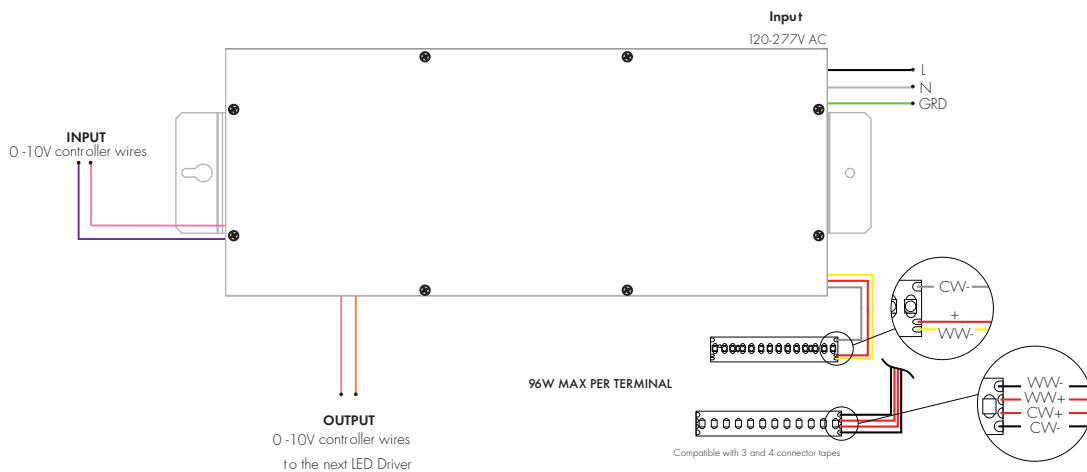

Ordering Code

MODEL	POWER	OUTPUT	CONTROL
PS010VD - 10V Vintage Dim Power Supply	96 - 96 W	24 - 24 VDC	W2C - Standard Two Channel (Dim 1: Intensity, Dim 2:CCT)