



**Features**

- Constant voltage output
- Input Voltage, 120-277VAC
- Compatible with Triac, MLV, ELV, & 0-10V Dimmers
- Flicker-free dimming
- Cooling by free air convection
- Full protection metal case
- Auto reset breakers, from short circuit, overloading, & over temperature
- Load 10 – 100%
- Dry location (IP20)
- 5 year Warranty



**Technical Information**

**Input voltage**

120-277V AC, 1.1A, 50/60Hz

**Output signal**

24 VDC, 4.0 A

**Maximum wattage**

96 watt circuits

**Dimming curve**

Linear, 100% - 0% (HydraDrive)

**Dimming**

Standard Two Channel: Dim 1: Channel 1 Intensity; Dim 2: Channel 2 Intensity

**Ambient Operating Temperature**


-20C to +35C

**Mounting**


Surface mounted with conduit access

**Weight**

3.8 lbs

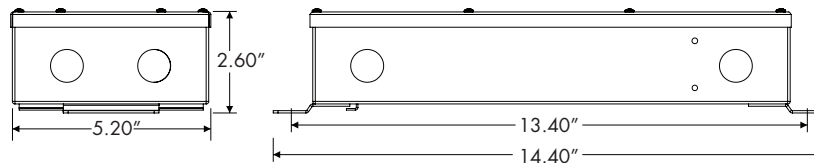

**Wiring Diagram**

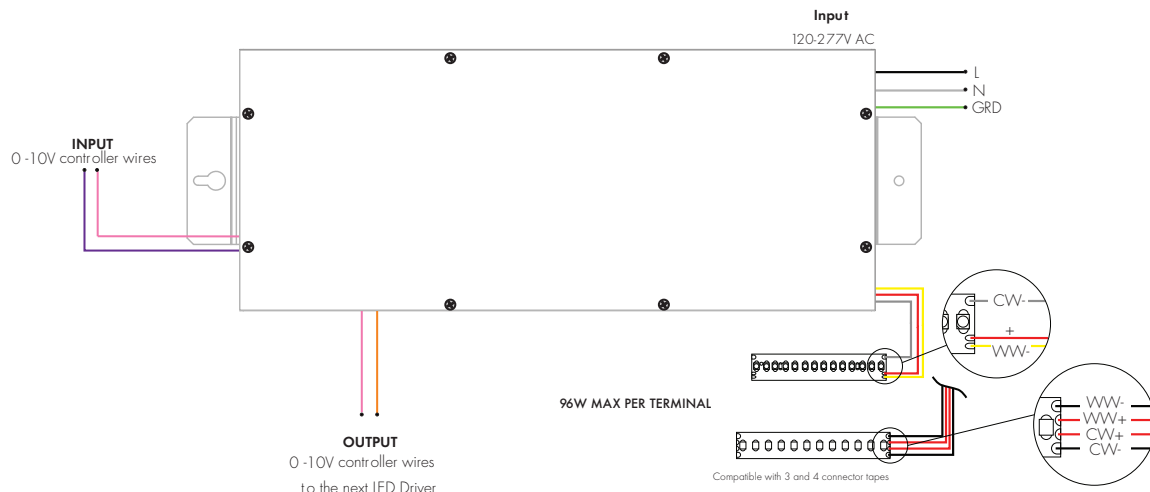

**Ordering Code**

MODEL	POWER	OUTPUT	CONTROL
PS010VD - 10V Vintage Dim Power Supply	96 - 96 W	24 - 24 VDC	W2I - Standard Two Channel (Dim 1: Warm Channel Intensity, Dim 2: Cool Channel Intensity)